



# LED T8 4-Ft Tube Recessed Ceiling Light Fixture

LEDGHL320-4-4LR




2-Ft x 4-Ft (nominal) – 5" Depth – 4 LED Tubes — Premium-Grade for LED T8 Light Tube(s) — ETL Listed

## FEATURES

- Heavy-Duty Safety Switch
- 22-Gauge, Cold-Rolled Steel Housing
- 20-Gauge Steel or Extruded Aluminum Door Frame Screwed at Each Corner
- T-Hinge & Spring-Loaded Latch
- Door Frame Painted after Fabrication
- Screwed-On End Caps
- ETL Listed
- Conforms to UL Standard 1598 - SUB 8750

## SPECIFICATIONS

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

<b>PART NUMBER</b>	LEDGHL320-4-4LR
<b>Type</b>	For inverted T-Bar installations
<b>Door Frame</b>	20-gauge cold-rolled steel or extruded aluminum in various finishes; T-hinge, positive-spring-loaded latch
<b>Optics</b>	Clear prismatic acrylic standard
<b>Construction</b>	22-gauge cold-rolled steel housing
<b>Finish</b>	Baked white polyester finish / Minimum Reflectance: 86%
<b>Wiring</b>	Operates T8 LED light tube(s) only
<b>Labels</b>	ETL-Listed / Conforms to UL Standard 1598-SUB8750
<b>Lamp Type</b>	LED T8 light tube, self-driven Both black and white leads connected to the same end 



## SAFETY SWITCH




LED LUMINAIRE ON/OFF SAFETY SWITCH

- Easily accessible on exterior of wire way


- Allows individual fixture to be switched ON/OFF during re-lamping or Maintenance
- Prevents damage to lamp and electrical shock during lamping and re-lamping
- Allows safe entry to wire way channel where power connector can be disconnected for maintenance to fixture

## CROSS SECTION

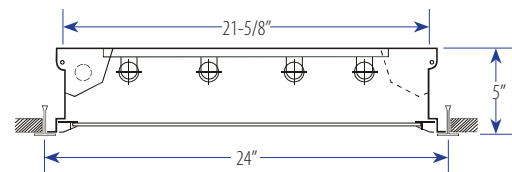

## BACK PLATE

ACCESS PLATE 7/8" OFFSET K.O.

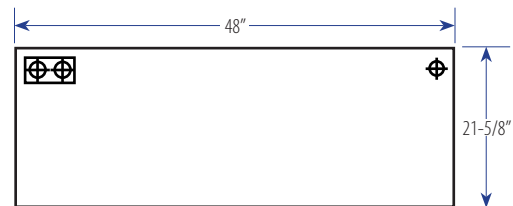

Available for the T-Bar Luminaire (NOT INCLUDED)

## White LED T8 Tubelight / 4 Ft

Series LED48T8SM



Long-Life, Energy-Efficient Drop-In Fluorescent Replacement Tubes in 2-Pin/G13 Base

Clear Lens – 3000K or 4100K or 5200K White – Consumes 18 Watts Premium SMD LEDs Operates on 90-to-290VAC

LEDTRONICS, INC.®  
THE FUTURE OF LIGHT

© 2010 LEDtronics, Inc.



23105 Kashiwa Court, Torrance, CA 90505  
Phone: (800) 579.4875 / (310) 534.1505  
Fax: (310) 534.1424  
E-mail: webmaster@ledtronics.com  
Website: http://www.ledtronics.com

www.LEDtronics.com

LOG 325 / Rev 10 - 2010

Check LEDTRONICS.COM for latest data. Printed material may be outdated.