



# LED T8 4-Ft T-Bar Parabolic Louver Light Fixture

LEDGPA510-2-4R-S16



For 2 T8 Bi-Pin 48" Lamps — Aluminum w/Silver Finish — Premium-Grade for LED T8 Light Tube(s) — ETL Listed

## FEATURES

- **Fixture Warranty:** 2 Years
- **Housing:** 22-Gauge, Cold-Rolled Steel with Baked White Polyester Finish – 86% Minimum Reflectance
- **Parabolic Louver:** Full 3-inch Deep, 16-Cell / Aluminum with Semi-Specular Low-Iridescent Silver Finish
- **Latch:** T-Hinge & Spring-Loaded
- Heavy-Duty On/Off Safety Switch
- **Safety Assurance:** ETL Listed / Conforms to UL Standard 1598 - SUB 8750
- **Environment-Friendly:** RoHS Compliant

## SAFETY SWITCH



- Easily accessible on exterior of wire way
- Allows safe entry to wire way channel where power connector can be disconnected for maintenance to fixture
- Allows individual fixture to be switched ON/OFF during re-lamping or Maintenance
- Prevents damage to lamp and electrical shock during lamping and re-lamping

## SPECIFICATIONS


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

<b>PART NUMBER</b>	LEDGPA510-2-4R-S16
<b>Type</b>	2-Lamp recessed mounted luminaire accommodates deep-cell aluminum parabolic louvers and other diffusing media. For installation in inverted T-Bar ceilings.
<b>Diffusing Media</b>	Deep-cell aluminum parabolic louvers – 3" min. depth. Semi-specular low-iridescent silver finish standard.
<b>Construction</b>	22-gauge cold-rolled steel housing with 18ga end plates - Spot welded seams and corners
<b>Finish</b>	Baked white polyester finish / Minimum Reflectance: 86%
<b>Lamp Type</b>	Operates T8 LED light tube(s) only, self-driven
<b>Labels</b>	ETL-Listed / Conforms to UL Standard 1598-SUB8750
<b>Wiring</b>	Both black and white leads connected to the same end Hot A.C. Line — Black Common — White
<b>Weight</b>	16.5 lbs / 264 oz / 7.48 kg — without tubes


ONLY FIXTURE IS SOLD —  
4-ft. LED T8 LAMPS SOLD SEPARATELY.



For Indoor, Dry Locations.  
Never Install Fluorescent Tubes in This Fixture.

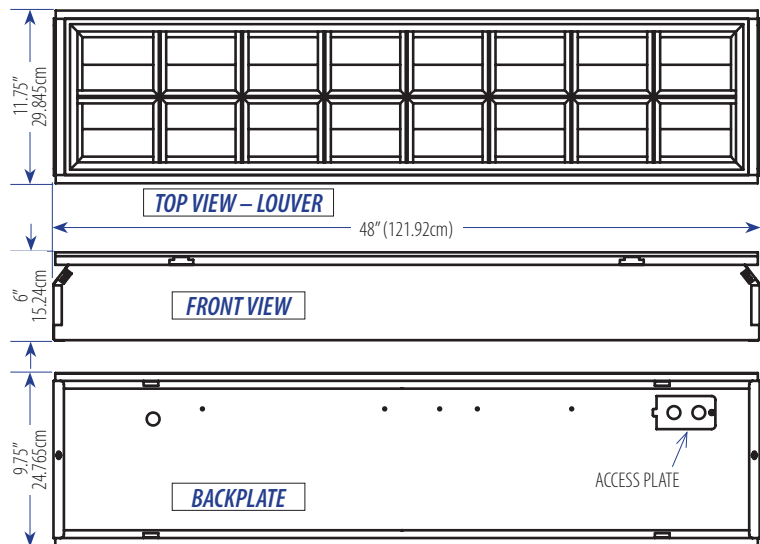

## CROSS SECTION

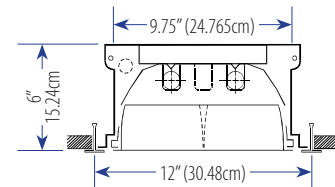

AVAILABLE FOR THE LUMINAIRE FIXTURES (NOT INCLUDED)

**White LED T8 Tubelight / 4 Ft**  
Series LED48T8SM



Long-Life,  
Energy-Efficient Drop-In  
Fluorescent Replacement  
Tubes in 2-Pin/G13 Base

Clear Lens – 3000K or 4100K or 5200K White  
Consumes 18 Watts – Premium SMD LEDs – Operates on 90-to-290VAC



**LEDTRONICS**®  
Creating the Future of LED Light Since 1983™

© 2013 LEDtronics, Inc.



23105 Kashiwa Court, Torrance, CA 90505  
Phone: (800) 579.4875 / (310) 534.1505  
Fax: (310) 534.1424  
E-mail: info@ledtronics.com  
Website: ledtronics.com

www.LEDtronics.com

LOG 434 / Rev 08-2013

Check LEDTRONICS.COM for latest data.  
Printed material may be outdated.