



LED Exit Sign T6 Bulbs

Less than 1 Watt – 120VAC – 250° Beam – E12, E17 Screw Bases or 15mm DC Bayonet



FEATURES

- 5 Year LEDtronics Warranty
- Direct Incandescent Replacement
- Up to 90% Energy Reduction over Incandescents
- Lumen Maintenance over 70% @ 100,000 Hours
- Solid State – Shock & Vibration Resistant
- Wide Operating Temperature: -20°C to +50°C
- UL V-2 White Polycarbonate Sleeve, UL V-0 Semi-Frosted Polycarbonate Tube
- Available Options for Volume Quantities: Other Colors, Voltages & Double Lumen Version

APPLICATIONS

- Compatible with Most Standard Single or Double-Sided EXIT Signs
- Decorative & Accent Lighting
- Picture Lights



Over 35 Years of LEDtronics Design, Engineering & Manufacturing Experience

- EXLT6-4E12-0AG-001
- EXLT6-4E12-0ER-001
- EXLT6-4E12-XHW-001
- EXLT6-4E12-XNW-001

Less than 1 Watt, Replaces Incandescents up to 7W



E12 Candelabra Screw Base

	OAG	0ER	XHW	XNW
Color	Aqua Green	Super Red	Halogen White	Natural White
λd Wavelength / CCT	514nm	633nm	2800K~3300K	3800K~4300K
Input Power	0.6W	0.4W	0.8W	0.6W
Input Voltage	120VAC			
Input Current	0.015 A	0.020 A	0.015 A	0.017 A
Efficacy	70 lm/W	70 lm/W	143.5 lm/W	190 lm/W
Lumens	40 lm	30 lm	114.8 lm	114 lm
Max. Candela	7.5 cd	4.0 cd	19.4 cd	20 cd
Power Factor	0.30	0.20	0.30	0.30
Illumination Angle	250°			
Dimmability	Not Dimmable			
Dimensions	4.21 x 0.98 inch / 107 x 25 mm			
Net Weight	0.64 oz / 18.14 g			



LEDTRONICS®

America's Premium Brand LED Company™



© 2019 LEDtronics, Inc.

23105 Kashiwa Court, Torrance, CA 90505
 Phone: (800) 579.4875 / (310) 534.1505
 Fax: (310) 534.1424
 E-mail: info@ledtronics.com
 Website: ledtronics.com



To order LEDtronics products, contact the Distributor or Sales Representative in your area.

Visit our website to find your local Distributor or Representative from our worldwide network:

LEDtronics.com

WWW.LEDTRONICS.COM

LOG 449 / Rev 03-2019

Check LEDTRONICS.COM for latest data. Printed material may be outdated.


LED Exit Sign T6 Bulbs – E17 Screw Base

E17
Intermediate
Screw Base



EXLT6-4E17-0AG-001
EXLT6-4E17-0ER-001
EXLT6-4E17-XNW-001

	OAG	OER	XNW
Color	Aqua Green	Super Red	Natural White
λd Wavelength / CCT	514nm	633nm	3800K~4300K
Input Power	0.6 W	0.4 W	0.6 W
Input Voltage	120VAC		
Input Current	0.015 A	0.020 A	0.015 A
Efficacy	70 lm/W	70 lm/W	105 lm/W
Lumens	40 lm	30 lm	65 lm
Max. Candela	7.5 cd	4.0 cd	15 cd
Power Factor	0.30	0.20	0.30
Illumination Angle	250°		
Dimmability	Not Dimmable		
Dimensions	4.13 x 0.98 inch / 105 x 25 mm		
Net Weight	0.64 oz / 18.14 g		

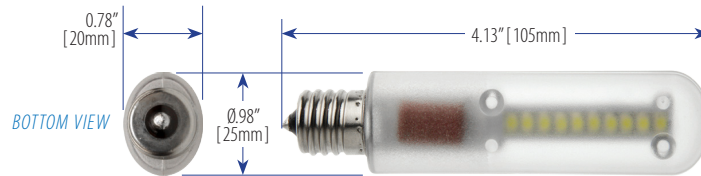

LED Exit Sign T6 Bulbs – Ba15d Bayonet Base

Ba15d
Double Contact
Bayonet Base



EXLT6-4BA15D-0AG-001
EXLT6-4BA15D-0ER-001
EXLT6-4BA15D-XNW-001

	OAG	OER	XNW
Color	Aqua Green	Super Red	Natural White
λd Wavelength / CCT	514nm	633nm	3800K~4300K
Input Power	0.6 W	0.4 W	0.6 W
Input Voltage	120VAC		
Input Current	0.015 A	0.020 A	0.015 A
Efficacy	70 lm/W	70 lm/W	105 lm/W
Lumens	40 lm	30 lm	65 lm
Max. Candela	7.5 cd	4.0 cd	15 cd
Power Factor	0.30	0.20	0.30
Illumination Angle	250°		
Dimmability	Not Dimmable		
Dimensions	4.25 x 0.98 inch / 108 x 25 mm		
Net Weight	0.64 oz / 18.14 g		

