



LED Post Top High Lumen Bulbs, E39

Only 60 Watts, Replaces MH and HPS 175 to 250 Watts, E39 Mogul Base



FEATURES

- 3 Year LEDtronics Warranty
- Energy Savings up to 80%
- Lower Price / Higher Lumen
- Longer Life / Sustainability / Dependability
- No UV or IR
- Solid State – High Shock/Vibration Resistant
- High CRI >70
- ROHS Compliant

APPLICATIONS

- Street and Highway Lighting
- Outdoor Parking Areas Lighting
- Driveway & Walkway Lighting
- Security Lighting
- Parks / Playgrounds
- Rail Road Station Platforms
- Pendant Lighting
- Globe Lighting


30 Years of LEDtronics Design, Engineering & Manufacturing Experience



LED26SM-60W-XIW-101W (Warm White)
LED26SM-60W-XNW-101W (Natural White)
LED26SM-60W-XPW-101W (Pure White)

	WARM WHITE	NATURAL WHITE	PURE WHITE
Color Temperature	2800K~3200K	3800K~4200K	5800K~6200K
Input Power	59 Watts	57 Watts	60 Watts
Input Voltage	90VAC~277VAC (Tested @ 120VAC)		
Total Lumens	7086 lm	6639 lm	6458 lm
Max. Candela	743 cd	676 cd	652 cd
Power Factor	0.99	0.99	0.99
Efficacy	120 lm/W	116 lm/W	108 lm/W
CRI	>70	>70	>72
Light Pattern	Omnidirectional		
Operating Temp.	-4°F to +113°F / -20°C to +45°C		
Base Style	E39 Mogul Screw Base		
Dimensions	L11.89 x W2.88 inch / L302.0 x W73.2 mm		
Net Weight	1.2 lbs / 0.54 kg		

BOTTOM VIEW

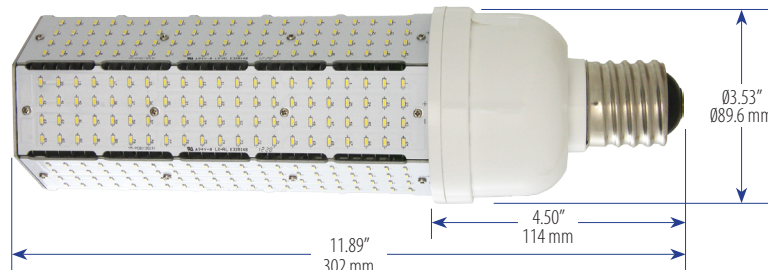

LEDTRONICS®

Creating the Future of LED Light Since 1983™



© 2013 LEDtronics, Inc.

23105 Kashiwa Court, Torrance, CA 90505

Phone: (800) 579.4875 / (310) 534.1505

Fax: (310) 534.1424

E-mail: info@ledtronics.com

Website: ledtronics.com

To order LEDtronics products,
contact the Distributor or Sales Representative in your area.

Visit our website to find your local Distributor or Representative from our worldwide network:

LEDTRONICS.COM

www.LEDTRONICS.COM


LOG 459 / Rev 11 - 2013

Check LEDTRONICS.COM for latest data.
Printed material may be outdated.

LED Post Top High Lumen Bulbs, E39 Base



2

PHOTOMETRIC REPORTS:

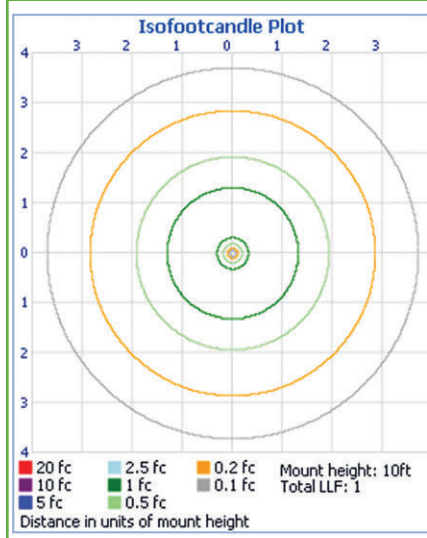



LED26SM-60W-XIW-101W

Filename: LED26SM-60W-XIW-101W
Manufacturer: LEDTRONICS -
Luminaire: NO LENS, 120VAC, 59.0W, E39
Luminaire Cat: LED26SM-60W-XIW-101W
Lamp: LUMEN RATING: 6159.6Lms.
Lamp Output: 1 lamp(s), rated Lumens/lamp: 6159.6
Max Candela: 605.0 at Horizontal: 0°, Vertical: 105°
Luminous Opening: Point
Test: 08-23-13
Photometry: Type C
CIE Class: General Diffuse
Cutoff Class: Noncutoff

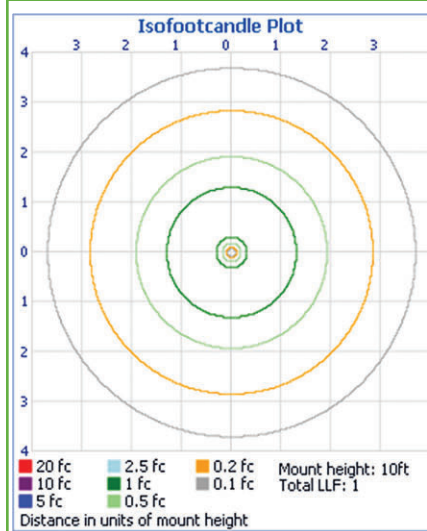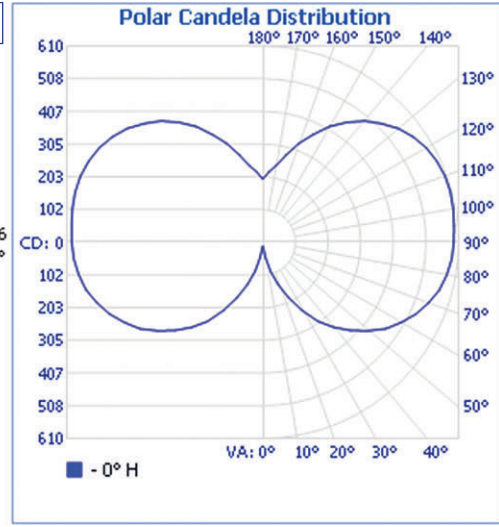

LED26SM-60W-XNW-101W

Filename: LED26SM-60W-XNW-101W
Manufacturer: LEDTRONICS -
Luminaire: NO LENS, 120VAC, 57.3W, E39
Luminaire Cat: LED26SM-60W-XNW-101W
Lamp: LUMEN RATING: 6182.4Lms.
Lamp Output: 1 lamp(s), rated Lumens/lamp: 6182.4
Max Candela: 605.3 at Horizontal: 0°, Vertical: 110°
Luminous Opening: Point
Test: 08-23-13
Photometry: Type C
CIE Class: General Diffuse
Cutoff Class: Noncutoff

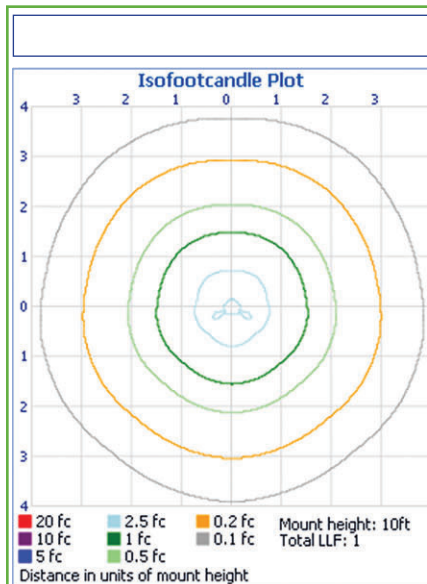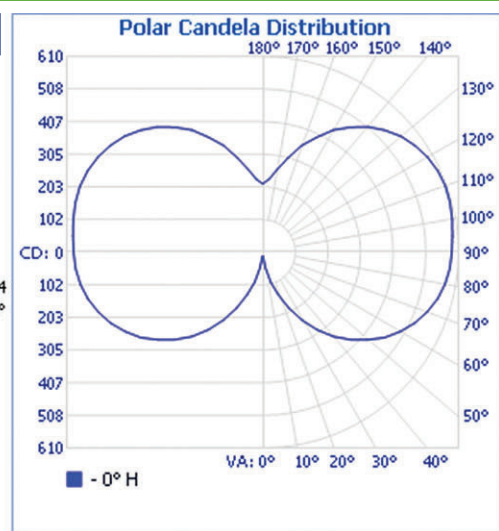


LED26SM-60W-XPW-101W

Filename: LED26SM-60W-XPW-101W 7-22-13
Manufacturer: LEDTRONICS -
Luminaire: NO LENS, 120VAC, 60W
Luminaire Cat: LED26SM-60W-XPW-101W
Lamp: LUMEN RATING: 6458.3Lms.
Lamp Output: 1 lamp(s), rated Lumens/lamp: 6458.3
Max Candela: 652.0 at Horizontal: 0°, Vertical: 80°
Luminous Opening: Point
Test: 07-22-13
Photometry: Type C
CIE Class: General Diffuse
Cutoff Class: Noncutoff

Illuminance at a Distance

Center Beam FC	Beam Width
75.24 fc	7.0ft
18.81 fc	14.0ft
8.36 fc	21.0ft
4.70 fc	28.0ft
3.01 fc	35.0ft
2.09 fc	42.0ft

Beam Spread: 129.1°

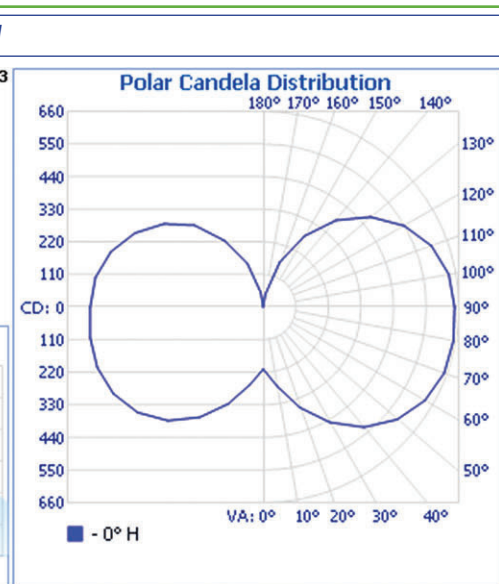

WWW.LEDTRONICS.COM

106459