



LED PLL Tube Lights, 2G11 Base, Frosted

Wide Voltage Range, Wide Illumination – 3500K or 4500K White – 4 Pin Base



FEATURES

- 3 Year LEDtronics Warranty
- Operates on 100~277VAC
- Direct Retrofit with Simple Ballast Bypass into 4-Pin, In-line PLL Fluorescent Fixtures
- Lumen Maintenance over 70% @ up to 50,000 Hrs
- Energy Savings of up to 50%
- Even Lighting, No Buzzing, No Flickering
- No UV Radiation / No Toxic Mercury

APPLICATIONS

- Office Lighting
- Retail Store Display Lighting
- Undercabinet Lighting
- Wall Sconce Lighting

More than 30 Years of LEDtronics Design, Engineering & Manufacturing Experience

PLL24SM-2G11-XMW-101WF (Medium White)
 PLL24SM-2G11-XWW-101WF (Natural White)

Emitted Color	Medium White	Natural White
Input Power	17.5 Watts	20 Watts
Input Voltage	100~277VAC (Tested @ 120VAC)	
Input Current	0.145A	0.168A
Total Lumens	1690 lm	1806 lm
Max. Candela	495 cd	513 cd
Power Factor	0.99	0.99
Efficacy	95 lm/W	90 lm/W
CRI	>80	>72
Color Temperature	3000K~4000K	4000K~5000K
Illumination Angle	110° x 130°	120°
Oper. Temperature	-4°F ~+104°F / -20°C ~+40°C	
Protection Rating	IP54	
Base	2G11 / 4 Pins	
Heatsink Material	Aluminum / Silver Color	
Lens Material	Polycarbonate / Frosted White	
Dimensions	L21.125 x W1.56 x D1.13 inch L537 x W40 x D29 mm	
Net Weight	0.63 lbs / 10.1 oz / 0.286 kg	



Replaces Fluorescent PLLs up to 40 Watts

Optional Accessory:
Mounting Support Clip Holder
MTG-CLIP-23452-A

LEDTRONICS®

Creating the Future of LED Light Since 1983™



23105 Kashiwa Court, Torrance, CA 90505

Phone: (800) 579.4875 / (310) 534.1505

Fax: (310) 534.1424

E-mail: info@ledtronics.com

Website: ledtronics.com



© 2015 LEDtronics, Inc.

To order LEDtronics products,
contact the Distributor or Sales Representative in your area.

Visit our website to find your local Distributor or Representative
from our worldwide network:

LEDTRONICS.COM

WWW.LEDTRONICS.COM

LOG 471 / Rev 03-2015

Check LEDTRONICS.COM for latest data.
Printed material may be outdated.


LED PLL Tube Light, 4-Pin 2G11 Base, Frosted, 16 inch




Optional Accessory:
Mounting Support Clip Holder
MTG-CLIP-23452-A

16 inch

Replaces Fluorescent PLLs
up to 24 Watts



BASE VIEW
(ENLARGED)

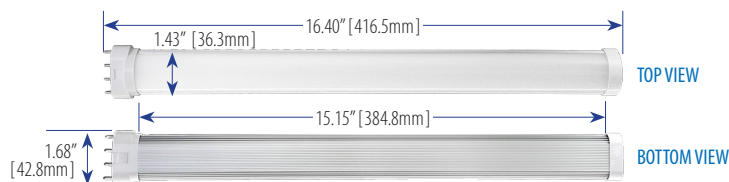

TOP VIEW

BOTTOM VIEW



PLL16SM-2G11-XWW-101WF


Input Power	12.5 Watts
Input Voltage	100~277VAC (Tested @ 120VAC)
Input Current	0.105A
Total Lumens	1045 lm
Max. Candela	310 cd
Power Factor	0.98
Efficacy	85 lm/W
CRI	>80
Emitted Color	Natural White
Color Temperature	4000K~4500K
Illumination Angle	105° x 130°
Oper. Temperature	-4°F ~ +113°F / -20°C ~ +45°C
Protection Rating	IP54
Base	2G11 / 4 Pins
Heatsink Material	Aluminum / Silver Color
Lens Material	Polycarbonate / Frosted White
Dimensions	L16.43 x W1.72 x D0.93 inch L417 x W44 x D24 mm
Net Weight	0.53 lbs / 8.48 oz / 240.4 g

LED PLL Tube Light, 4-Pin 2G11 Base, Frosted, 9 inch



9 inch

Replaces Fluorescent PLLs
up to 12 Watts



BASE VIEW
(ENLARGED)



TOP VIEW

BOTTOM VIEW



PLL09SM-2G11-XWW-101WF

Input Power	7.0 Watts
Input Voltage	100~277VAC (Tested @ 120VAC)
Input Current	0.060A
Total Lumens	755 lm
Max. Candela	230 cd
Power Factor	1.0
Efficacy	105 lm/W
CRI	>80
Emitted Color	Natural White
Color Temperature	4000K~4500K
Illumination Angle	110° x 130°
Oper. Temperature	-4°F ~ +122°F / -20°C ~ +50°C
Protection Rating	IP54
Base	2G11 / 4 Pins
Heatsink Material	Aluminum / Silver Color
Lens Material	Polycarbonate / Frosted White
Dimensions	L8.89 x W1.68 x D1.15 inch L226 x W43 x D29 mm
Net Weight	0.3 lbs / 4.8 oz / 136 g