



LED U-Bent T8 Tube Light, Frosted

2 Pin / G13 Base – Only 15 Watts, Replaces Fluorescent Tubes up to 34W – 100 to 277 VAC




FEATURES

- 3 Year LEDtronics Warranty
- Direct Retrofit into Fluorescent T8, T10 & T12 Fixtures
- Energy Savings of up to 55%
- Lumen Maintenance over 70% @ 50,000+ Hours
- Even Lighting, No Buzzing, No Flickering
- No UV Radiation / No Toxic Mercury / RoHS Compliant
- UL/cUL Classified, E342914 (GF-15UXXX-XX)
- UV-Protected Polycarbonate Diffused Lens
- Longer Life, Sustainability, Dependability

APPLICATIONS

- Ceiling Lights in Office, Schools, Hallways
- Department Stores
- Retail Outlets
- Restaurants, Fast Food Chains
- Hospitals, Medical Offices
- Light Boxes, Signage Backlighting

30 Years of LEDtronics Design, Engineering & Manufacturing Experience

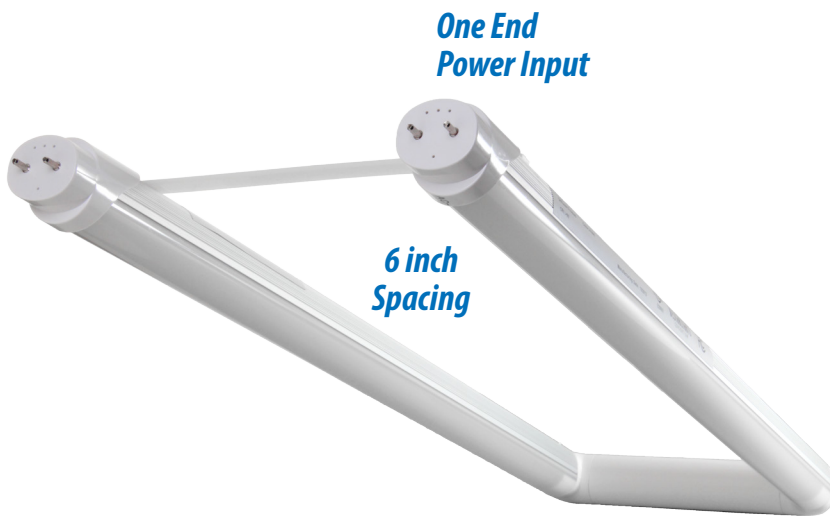

LED24T8U6-XWW-101WF

Input Power	14 Watts
Input Voltage	100~277VAC (Tested @ 120VAC)
Total Lumens	1410 lm
Efficacy	100 lm/W
Max. Candela	430 cd
Power Factor	0.99
CRI	83
Emitted Color	Natural White
Color Temperature	4000K~4500K
Illumination Angle	105° x 145°
Oper. Temperature	-4°F ~+122°F / -20°C ~+50°C
LED Type	2835/130 pcs. – LM80 qualified Epistar
Heatsink Material	Aluminum / Silver Color
Lens Material	Polycarbonate / Frosted White
Dimensions	L 22.39 x W 7.02 inch L 569 x W178 mm
Net Weight	0.85 lbs / 13.6 oz / 0.385 kg



LEDTRONICS®

Creating the Future of LED Light Since 1983™

23105 Kashiwa Court, Torrance, CA 90505

Phone: (800) 579.4875 / (310) 534.1505

Fax: (310) 534.1424

E-mail: info@ledtronics.com

Website: ledtronics.com



© 2014 LEDtronics, Inc.

To order LEDtronics products, contact the Distributor or Sales Representative in your area.

Visit our website to find your local Distributor or Representative from our worldwide network:

LEDTRONICS.COM

WWW.LEDTRONICS.COM

LOG 490 / Rev 07-2014

Check LEDTRONICS.COM for latest data. Printed material may be outdated.