



Hi-Flux LED Slim Striplights, 12VDC, IP68

For Indoor/Outdoor Use – Lengths 6"/12"/24"/48" – Warm, Pure & Cool White




FEATURES

- 3 Year LEDtronics Warranty
- Waterproof: IP68 Certified Sealed Enclosure
- Clear Polycarbonate Cover, Aluminum Bar
- Solid-State: High-Shock & Vibration Resistant
- Easy Installation with Quick Mounting Brackets
- Over 50,000 Hour White LED, Lumen Maintenance over 70%
- Even Lighting, No Buzzing, No Flickering
- No UV Radiation / No Toxic Mercury
- Longer Life, Sustainability, Dependability

APPLICATIONS

- Recreational Vehicle Interiors
- Marine Recreation Applications
- Bus/Shuttle/Railcar Passenger Interiors
- Interior Design Uses, Concealed Accent Lighting
- Retail Store Displays, Undercounter/Undercabinet Lighting
- Coolers, Freezers
- Closet Illumination
- Cove & Edge Lighting

Over 35 Years of LEDtronics Design, Engineering & Manufacturing Experience

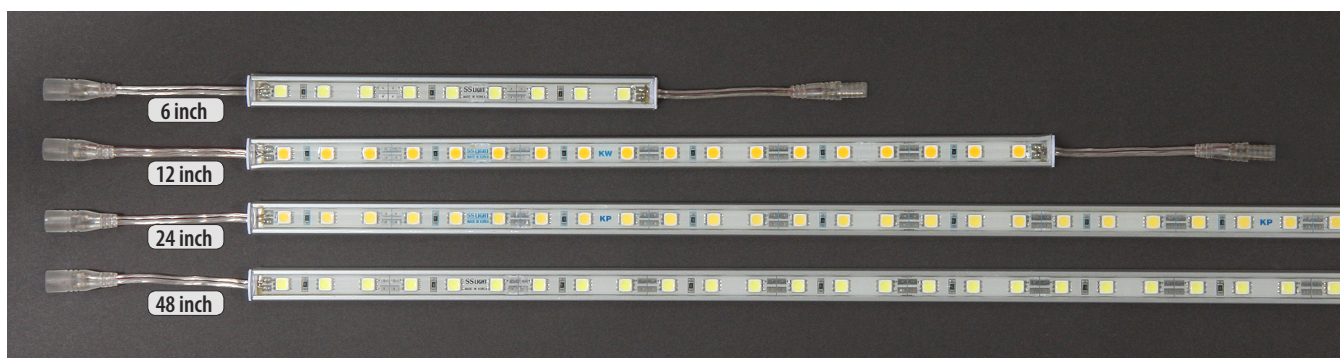

www.LEDtronics.com

LOG 502 / Rev 11-2017

TBL4520-9W6-XIW-012W-WP (Warm White)


TBL4520-9W6-XPW-012W-WP (Pure White)

TBL4520-9W6-XCW-012W-WP (Cool White)

Emitted Color	WARM WHITE	PURE WHITE	COOL WHITE
Color Temperature	2500K~3000K	5000K~5500K	8000K~9000K
Input Voltage	12VDC		
Input Power	1.9 Watts	2.1 Watts	2.0 Watts
Input Current	0.160 A	0.177 A	0.170 A
Max. Candela	62 cd	53 cd	60 cd
Total Lumens	168 lm	151 lm	145 lm
Efficacy	86 lm/W	71 lm/W	70 lm/W
Viewing Angle	90°		
No. of LEDs	9		
Protection Rating	IP68 (Waterproof)		
Dimensions	6.28 x 0.51 inch / 159.4 x 13 mm		
Weight	0.6 oz / 17 g		

6 inch Long

Maximum Daisy-Chain Run Length per Power Connection:
12 feet (24 6-inch modules per linear run)



LEDTRONICS®

America's Premium Brand LED Company™



© 2017 LEDtronics, Inc.

23105 Kashiwa Court, Torrance, CA 90505

Phone: (800) 579.4875 / (310) 534.1505

Fax: (310) 534.1424

E-mail: info@ledtronics.com

Website: ledtronics.com



To order LEDtronics products,
contact the Distributor or Sales Representative in your area.

Visit our website to find your local Distributor or Representative from our worldwide network:


LEDtronics.com

Check LEDtronics.com for latest data.
Printed material may be outdated.

12 inch Long

Max. Daisy-Chain Run Length per Power Connection: 12 feet (12 12-inch modules per linear run)


	TBL4520-18W12-XIW-012W-WP (Warm White)		
	TBL4520-18W12-XPW-012W-WP (Pure White)		
	TBL4520-18W12-XCW-012W-WP (Cool White)		
Emitted Color	WARM WHITE	PURE WHITE	COOL WHITE
Color Temperature	2500K~3000K	5000K~5500K	8000K~9000K
Input Voltage	12VDC		
Input Power	3.90 Watts	4.25 Watts	4.05 Watts
Input Current	0.321 A	0.355 A	0.336 A
Max. Candela	123 cd	106 cd	121 cd
Total Lumens	335 lm	303 lm	286 lm
Efficacy	86 lm/W	71 lm/W	71 lm/W
No. of LEDs	18		
Protection Rating	IP68		
Dimensions	12.20 x 0.51 inch / 310 x 13 mm		
Weight	1.2 oz / 34 g		



24 inch Long

Max. Daisy-Chain Run Length per Power Connection: 12 feet (6 24-inch modules per linear run)


	TBL4520-36W24-XIW-012W-WP (Warm White)		
	TBL4520-36W24-XPW-012W-WP (Pure White)		
	TBL4520-36W24-XCW-012W-WP (Cool White)		
Emitted Color	WARM WHITE	PURE WHITE	COOL WHITE
Color Temperature	2500K~3000K	5000K~5500K	8000K~9000K
Input Voltage	12VDC		
Input Power	7.8 Watts	8.5 Watts	8.1 Watts
Input Current	0.641 A	0.709 A	0.671 A
Max. Candela	246 cd	211 cd	242 cd
Total Lumens	670 lm	605 lm	572 lm
Efficacy	86 lm/W	71 lm/W	71 lm/W
No. of LEDs	36		
Protection Rating	IP68		
Dimensions	23.96 x 0.51 inch / 608.5 x 13 mm		
Weight	2.4 oz / 68 g		



48 inch Long

Max. Daisy-Chain Run Length per Power Connection: 12 feet (3 48-inch modules per linear run)


	TBL4520-72W48-XIW-012W-WP (Warm White)		
	TBL4520-72W48-XPW-012W-WP (Pure White)		
	TBL4520-72W48-XCW-012W-WP (Cool White)		
Emitted Color	WARM WHITE	PURE WHITE	COOL WHITE
Color Temperature	2500K~3000K	5000K~5500K	8000K~9000K
Input Voltage	12VDC		
Input Power	15.6 Watts	17.0 Watts	16.2 Watts
Input Current	1.282 A	1.418 A	1.342 A
Max. Candela	492 cd	424 cd	483 cd
Total Lumens	1340 lm	1210 lm	1143 lm
Efficacy	86 lm/W	71 lm/W	71 lm/W
No. of LEDs	72		
Protection Rating	IP68		
Dimensions	47.63 x 0.51 inch / 1210 x 13 mm		
Weight	5.2 oz / 147.4 g		

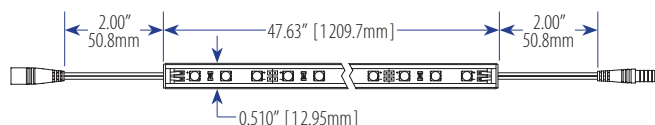


LEDtronics LED striplights provide color accents and illumination in shopping malls, showrooms and homes in Mexico, Nevada and California



ACCESSORIES

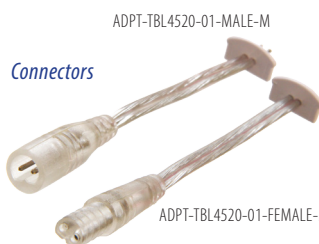

MTG-CLIP-TBL4520-001



Mounting Clips



MTG-CLIP-TBL4520-002

Diffusing Lenses (Translucent Acrylic)

LENS-TBL4520-12F 12" Long
LENS-TBL4520-24F 24" Long
LENS-TBL4520-48F 48" Long