



LED A14 Bulb, Dimmable, Clear, 1.5W

Replaces Incandescents up to 15 Watts – Omnidirectional – 120VAC – E26 Base



FEATURES

- 2 Year LEDtronic Limited Warranty
- Direct Retrofit into E26 Edison Base Fixtures
- Lumen Maintenance over 70% @ 50,000+ Hours
- Omnidirectional Beam Pattern / High CRI: 80+
- Energy Savings of up to 85%
- Dimmable with Standard Lamp Dimmers
- Title 20 Compliant
- Water-Clear Tempered Glass Lens

APPLICATIONS

- Suitable for Damp Locations
- Architectural / Décor Lighting
- Marquee & Sign Lights
- Store Front Displays & Retail Display Cases
- Accent Lighting

Over 35 Years of LEDtronic Design, Engineering & Manufacturing Experience


**E26 BASE
CLEAR**



Replaces Incandescent Bulbs
up to 15 Watts

DEC-A14C-1W-XHW-120AWD

Input Power	1.5 Watts
Input Voltage	120VAC
Total Lumens	125 lm
Max. Candela	15 cd
Power Factor	0.75
Efficacy	85 lm/W
CRI	>80
Color	Halogen White
Color Temperature	2400K~2700K
Illumination Angle	Omnidirectional
Oper. Temperature	-4°F ~+113°F (-20°C ~+45°C)
Protection Rating	IP50 – Dust Protected
Heatsink	Aluminum / Silver
Lens	Tempered Glass / Clear
Dimensions	3.52 x 0.177 inch / 90 x 045 mm
Net Weight	0.125 lb / 2.0 oz / 56.7 g

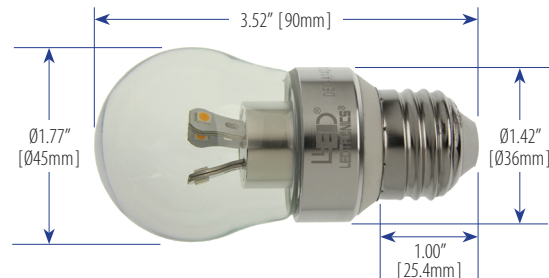

Title 20 Compliant



LEDTRONICS®

America's Premium Brand LED Company™



© 2018 LEDtronic, Inc.



23105 Kashiwa Court, Torrance, CA 90505
 Phone: (800) 579.4875 / (310) 534.1505
 Fax: (310) 534.1424
 E-mail: info@ledtronics.com
 Website: ledtronics.com

To order LEDtronic products,
contact the Distributor or Sales Representative in your area.

Visit our website to find your local Distributor or Representative from our worldwide network:

LEDTRONICS.COM

WWW.LEDTRONICS.COM

LOG 519 / Rev 08-2018

Check LEDTRONICS.COM for latest data.
Printed material may be outdated.

PHOTOMETRIC REPORT:

DEC-A14C-1W-XHW-120AWD

Filename: DEC-A14C-1W-XHW-120AWD

Manufacturer: LEDTRONICS

Luminaire: CLEAR LENS, DIM, 120VAC, 1.4W

Luminaire Cat: DEC-A14C-1W-XHW-120AWD

Lamp: LUMEN RATING: 126.9 Lms.

Lamp Output: 1 lamp(s), rated Lumens/lamp: 126.9

Max Candela: 16.5 at Horizontal: 0°, Vertical: 80°

Luminous Opening: Point

Test: 3-10-14

Photometry : Type C

CIE Class: General Diffuse

Cutoff Class: Noncutoff

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	8.7	6.8%	6.8%
0-40	15.7	12.4%	12.4%
0-60	37.2	29.3%	29.3%
60-90	38.9	30.6%	30.6%
70-100	35.4	27.9%	27.9%
90-120	31.5	24.8%	24.8%
0-90	76.0	59.9%	59.9%
90-180	50.9	40.1%	40.1%
0-180	126.9	100%	100%

