



LED A14 Bulb, Dimmable, Clear, 3W

Replaces Incandescents up to 25 Watts – Omnidirectional – 120VAC – E26 Base



FEATURES

- 2 Year LEDtronics Limited Warranty
- Direct Retrofit into E26 Edison Base Fixtures
- Lumen Maintenance over 70% @ 50,000+ Hours
- Omnidirectional Beam Pattern / High CRI: 80+
- Energy Savings of up to 90%
- Dimmable with Standard Lamp Dimmers
- Water-Clear Tempered Glass Lens

APPLICATIONS

- Suitable for Damp Locations
- Architectural / Décor Lighting
- Marquee & Sign Lights
- Store Front Displays & Retail Display Cases
- Accent Lighting

Over 30 Years of LEDtronics Design, Engineering & Manufacturing Experience


**E26 BASE
CLEAR**



Replaces Incandescent Bulbs
up to 25 Watts

DEC-A14C-3W-XHW-120AWD

Input Power	2.5 Watts
Input Voltage	120VAC
Input Current	0.030A
Total Lumens	220 lm
Max. Candela	30 cd
Power Factor	0.75
Efficacy	85 lm/W
CRI	>80
Color	Halogen White
Color Temperature	2400K~2700K
Illumination Angle	Omnidirectional
Oper. Temperature	-4°F ~+113°F (-20°C ~+45°C)
Protection Rating	IP50 – Dust Protected
Heatsink	Aluminum / Silver Color
Lens	Tempered Glass / Clear
Dimensions	3.52 x 0.177 inch / 90 x 045 mm
Net Weight	0.125 lb / 2.0 oz / 56.7 g

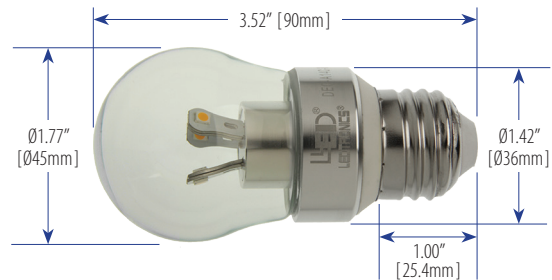

LEDTRONICS
America's Premium Brand LED Company™

23105 Kashiwa Court, Torrance, CA 90505
Phone: (800) 579.4875 / (310) 534.1505
Fax: (310) 534.1424
E-mail: info@ledtronics.com
Website: ledtronics.com

ISO 9001:2008 CERTIFIED by DNV

© 2017 LEDtronics, Inc.

To order LEDtronics products,
contact the Distributor or Sales Representative in your area.

Visit our website to find your local Distributor or Representative from our worldwide network:
LEDTRONICS.COM

WWW.LEDTRONICS.COM

LOG 520 / Rev 01-2017

Check LEDTRONICS.COM for latest data.
Printed material may be outdated.

PHOTOMETRIC REPORT:

DEC-A14C-3W-XHW-120AWD

Filename: DEC-A14C-3W-XHW-120AWD

Manufacturer: LEDTRONICS

Luminaire: CLEAR LENS, DIM, 120VAC, 2.5W

Luminaire Cat: DEC-A14C-3W-XHW-120AWD

Lamp: . LUMEN RATING: 571.5 Lms.

Lamp Output: 1 lamp(s), rated Lumens/lamp: 571.5

Max Candela: 33.3 at Horizontal: 0°, Vertical: 80°

Luminous Opening: Point

Test: 3-10-14

Photometry : Type C

CIE Class: General Diffuse

Cutoff Class: Semicutoff

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	13.3	2.3%	6.1%
0-40	24.7	4.3%	11.3%
0-60	62.1	10.9%	28.4%
60-90	68.6	12%	31.4%
70-100	64.0	11.2%	29.3%
90-120	56.0	9.8%	25.7%
0-90	130.7	22.9%	59.9%
90-180	87.6	15.3%	40.1%
0-180	218.3	38.2%	100%

