



# LED G30 Globe Bulb, Frosted, 8 Watts

120VAC – Replaces up to 60W Incandescents – Omnidirectional Beam – E26 Base



## FEATURES

- 3 Year LEDtronics Limited Warranty
- Direct Retrofit into E26 Edison Base Fixtures
- Energy Savings of up to 80%
- High CRI / High Lumen
- 300° Wide Light Distribution
- UV-Protected Polycarbonate Diffused Lens
- LED LM-80 Report Available

## APPLICATIONS

- Suitable for Damp Locations
- Architectural Lighting
- Task Lights
- Store Front Displays & Retail Display Cases
- Accent Lighting

Over 30 Years of LEDtronics Design, Engineering & Manufacturing Experience

WWW.LEDTRONICS.COM

LOG 538 / Rev 01-2017

Check LEDTRONICS.COM for latest data. Printed material may be outdated.




E26 BASE  
FROSTED

Replaces Incandescent  
Bulbs up to 75 Watts

## DEC-G30F-8W-XIW-101W

Input Power	8 Watts
Input Voltage	120VAC
Total Lumens	605 lm
Max. Candela	105 cd
Power Factor	1.0
Efficacy	85 lm/W
CRI	83
Color	Warm White
Color Temperature	2750K~3250K
Beam Angle	300°
Oper. Temperature	-22°F ~ +122°F -30°C ~ +50°C
Protection Rating	IP50 – Dust Protected
Body	Silver Color
Lens	Polycarbonate / Frosted White
Dimensions	5.07 x 03.74 inch / 128 x 095 mm
Net Weight	0.56 lb / 8.96 oz / 254.0 g

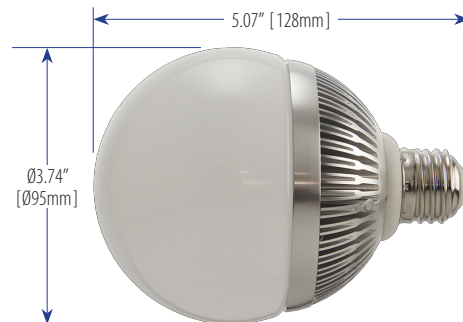

# LEDTRONICS®

America's Premium Brand LED Company™



23105 Kashiwa Court, Torrance, CA 90505  
 Phone: (800) 579.4875 / (310) 534.1505  
 Fax: (310) 534.1424  
 E-mail: [info@ledtronics.com](mailto:info@ledtronics.com)  
 Website: [ledtronics.com](http://ledtronics.com)

© 2017 LEDtronics, Inc.

To order LEDtronics products,  
contact the Distributor or Sales Representative in your area.

Visit our website to find your local Distributor or Representative from our worldwide network:

[LEDTRONICS.COM](http://LEDTRONICS.COM)

**PHOTOMETRIC REPORT:**

**DEC-G30F-8W-XIW-101W**

**Filename: DEC-G30F-8W-XIW-101W**

Manufacturer: LEDTRONICS -

Luminaire: FROSTED LENS, 120VAC, 6.9W

Luminaire Cat: DEC-G30F-8W-XIW-101W

Lamp: . LUMEN RATING: 690.1Lms.

Lamp Output: 1 lamp(s), rated Lumens/lamp: 690.1

Max Candela: 106.6 at Horizontal: 0°, Vertical: 5°

Luminous Opening: Point

Test: 7-1-14

Photometry : Type C

CIE Class: Semi-Direct

Cutoff Class: Noncutoff

**Lumens Per Zone**

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	10.2	1.5%	90-100	53.9	7.8%
10-20	29.8	4.3%	100-110	43.4	6.3%
20-30	47.3	6.9%	110-120	32.8	4.8%
30-40	61.5	8.9%	120-130	23.3	3.4%
40-50	71.0	10.3%	130-140	15.3	2.2%
50-60	75.6	11.0%	140-150	9.2	1.3%
60-70	75.4	10.9%	150-160	4.7	0.7%
70-80	71.2	10.3%	160-170	1.8	0.3%
80-90	63.7	9.2%	170-180	0.3	0%

