



LED CFL-Replacement Omnidirectional Lamps

6, 9 or 11 Watts – 85~277VAC – 3000K or 4000K White – 2 Pin G24D or 4 Pin G24Q Base



FEATURES

- 3 & 5 Year LEDtronics Warranty
- Direct Retrofit into Fixtures with G24D/G24Q Base
- Energy Savings of up to 50% over CFLs
- Lumen Maintenance over 70% @ 50,000+ Hours
- High CRI, High Lumen
- No UV/IR Radiation, No Toxic Mercury, RoHS Compliant
- Even Lighting, No Buzzing, No Flickering
- LED LM80 Reports Available



APPLICATIONS

- Ceiling Installations for General Ambient Lighting in Offices & Public Facilities
- Retail Store Lighting
- Museums, Galleries, Showrooms
- Hotels, Hospitality Areas
- Hospitals, Clinics, Workrooms
- Corridors, Lobbies, Stairways

Over 30 Years of LEDtronics Design, Engineering & Manufacturing Experience

2-Pin G24D
Universal Base




6 Watts,
Replaces CFLs up to 13W in
Omnidirectional Applications

LDLG24DU-8WF-XWW-101A

Input Power	6 Watts
Input Voltage	85~277VAC (Tested @ 120VAC)
Input Current	0.050A
Total Lumens	560 lm
Efficacy	95 lm/W
Max. Candela	65 cd
Power Factor	1.0
Emitted Color	Natural White
Color Temperature	3800K~4200K
CRI	85
R9	13
Beam Angle	360° Omnidirectional
Oper. Temperature	-40°F to +122°F / -40°C to +50°C
Base	2-Pin G24D / Polycarbonate / White
Heatsink	Aluminum / Silver Color
Lens	Polycarbonate / Frosted White
Dimensions	4.70 x Ø1.57 inch / 119 x Ø40 mm
Net Weight	0.18 lbs / 2.88 oz / 81.65 g
Warranty	3 Years

CAUTIONS

- Only for installations where lamp is oriented vertically, with base inserted either up or down.
- Ballast bypass required.
- Not intended for totally enclosed fixtures.
- Surge protection recommended.

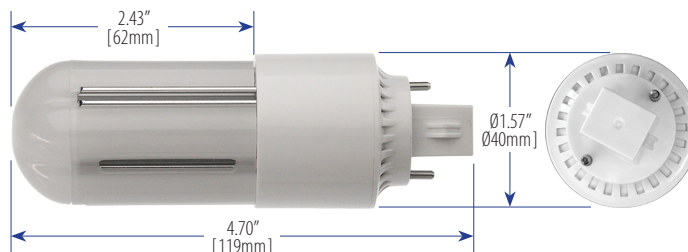

LEDTRONICS®

America's Premium Brand LED Company™



© 2017 LEDtronics, Inc.



23105 Kashiwa Court, Torrance, CA 90505
Phone: (800) 579.4875 / (310) 534.1505
Fax: (310) 534.1424
E-mail: info@ledtronics.com
Website: ledtronics.com

To order LEDtronics products,
contact the Distributor or Sales Representative in your area.

Visit our website to find your local Distributor or Representative from our worldwide network:

LEDtronics.com

www.LEDTRONICS.COM

LOG 567 / Rev 09-2017

Check LEDTRONICS.COM for latest data.
Printed material may be outdated.

LED CFL-Replacement Omnidirectional Lamps: G24D Base / 10 Watts

2

www.LEDTRONICS.COM

2-Pin G24D Universal Base



9 Watts,
*Replaces CFLs up to 18W
in Omnidirectional Applications*

LDLG24DU-10WF-XWW-101A

Input Power	9 Watts
Input Voltage	85~277VAC (Tested @ 120VAC)
Input Current	0.080A
Max. Candela	80 cd
Total Lumens	760 lm
Efficacy	80 lm/W
Power Factor	0.99
Emitted Color	Natural White
Color Temperature	3800K~4200K
CRI	85
Beam Angle	360° Omnidirectional
Oper. Temperature	-40°F to +122°F / -40°C to +50°C
Base	2-Pin G24D / Polycarbonate / White
Heatsink	Aluminum / Silver Color
Lens	Polycarbonate / Frosted White
Dimensions	6.67 x Ø1.57 inch / 169 x Ø40 mm
Net Weight	0.3 lbs / 4.8 oz / 136.1 g
Warranty	3 Years



CAUTIONS

- Only for installations where lamp is oriented vertically, with base inserted either up or down.
- Ballast bypass required.
- Not intended for totally enclosed fixtures.
- Surge protection recommended.



G24Q Base / 10 Watts


LDLG24QU-10WF-XWW-101A

Input Power	9 Watts
Input Voltage	85~277VAC (Tested @ 120VAC)
Input Current	0.080A
Max. Candela	80 cd
Total Lumens	760 lm
Efficacy	80 lm/W
Power Factor	0.99
Emitted Color	Natural White
Color Temperature	3800K~4200K
CRI	85
Beam Angle	360° Omnidirectional
Oper. Temperature	-40°F to +122°F / -40°C to +50°C
Base	4-Pin G24Q / Polycarbonate / White
Heatsink	Aluminum / Silver Color
Lens	Polycarbonate / Frosted White
Dimensions	6.67 x Ø1.57 inch / 169 x Ø40 mm
Net Weight	0.3 lbs / 4.8 oz / 136.1 g
Warranty	3 Years

4-Pin G24Q Universal Base



9 Watts,
*Replaces CFLs up to 18W
in Omnidirectional Applications*

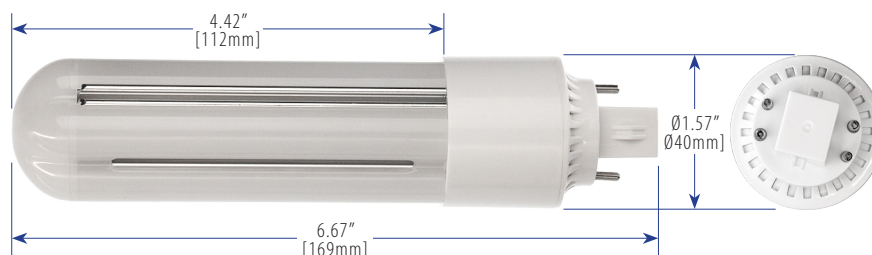


LED CFL-Replacement Omnidirectional Lamp: GX24D Base / 10 Watts



**2-Pin GX24D
Universal Base**



**10.5 Watts,
Replaces CFLs up to 18W
in Omnidirectional Applications**

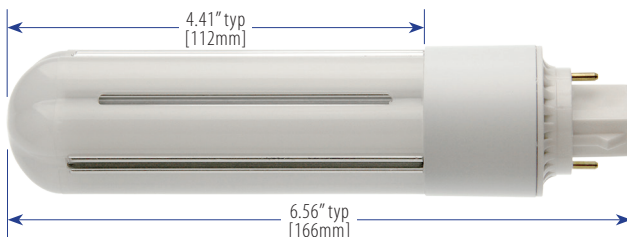


GX24Q Base / 10 Watts



**4-Pin GX24Q
Universal Base**



**10.5 Watts,
Replaces CFLs up to 18W
in Omnidirectional Applications**

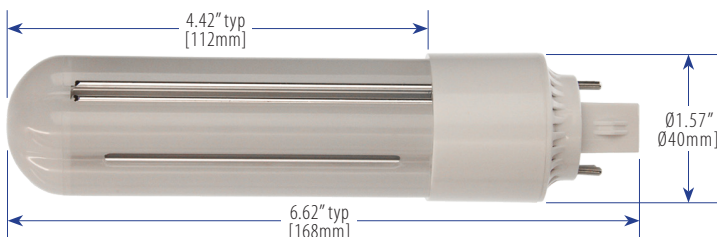

LDLGX24DU-10WF-XNW-101A

Input Power	10.5 Watts
Input Voltage	100~277VAC (Tested @ 120VAC)
Input Current	0.085A
Max. Candela	95 cd
Total Lumens	935 lm
Efficacy	90 lm/W
Power Factor	0.99
Emitted Color	Natural White
Color Temperature	4000K~4500K
CRI	≥80
Beam Angle	360° Omnidirectional
Dimmability	Not Dimmable
Oper. Temperature	-40°F to +122°F / -40°C to +50°C
Protection Rating	IP64
Base	2-Pin GX24D / Polycarbonate / White
Heatsink	Aluminum / Silver Color
Lens	Polycarbonate / Frosted White
Dimensions	6.56 x Ø1.57 inch / 166 x Ø40 mm
Net Weight	0.3125 lbs / 5.0 oz / 142 g
Warranty	5 Years

CAUTIONS

- Only for installations where lamp is oriented vertically, with base inserted either up or down.
- Ballast bypass required.
- Not intended for totally enclosed fixtures.
- Surge protection recommended.



LDLGX24QU-10WF-XNW-101A

Input Power	10.5 Watts
Input Voltage	100~277VAC (Tested @ 120VAC)
Input Current	0.090A
Max. Candela	95 cd
Total Lumens	900 lm
Efficacy	85 lm/W
Power Factor	1.0
Emitted Color	Natural White
Color Temperature	4000K~4500K
CRI	≥80
Beam Angle	360° Omnidirectional
Dimmability	Not Dimmable
Oper. Temperature	-40°F to +122°F / -40°C to +50°C
Protection Rating	IP64
Base	4-Pin GX24Q / Polycarbonate / White
Heatsink	Aluminum / Silver Color
Lens	Polycarbonate / Frosted White
Dimensions	6.62 x Ø1.57 inch / 168 x Ø40 mm
Net Weight	0.3125 lbs / 5.0 oz / 142 g
Warranty	5 Years

LED CFL-Replacement Omnidirectional Lamp: G24Q Base / 12 Watts


**11 Watts,
Replaces CFLs up to 23W
in Omnidirectional Applications**



**4-Pin G24Q
Universal Base**

LDLG24QU-12WF-XIW-101A (Warm White)
LDLG24QU-12WF-XWW-101A (Natural White)

	XIW	XWW
Input Power	11 Watts	
Input Voltage	85~277VAC (Tested @ 120VAC)	
Input Current	0.090A	0.095A
Max. Candela	105 cd	100 cd
Total Lumens	965 lm	
Efficacy	90 lm/W	85 lm/W
Power Factor	0.99	0.98
Emitted Color	Warm White	Natural White
Color Temperature	2800K~3200K	3800K~4200K
CRI	85	
Beam Angle	360° Omnidirectional	
Oper. Temperature	-40°F to +122°F / -40°C to +50°C	
Base	4-Pin G24Q / Polycarbonate / White	
Heatsink	Aluminum / Silver Color	
Lens	Polycarbonate / Frosted White	
Dimensions (typ.)	6.67 x Ø1.57 inch / 169 x Ø40 mm	
Net Weight	0.3 lbs / 4.8 oz / 136.1 g	
Warranty	3 Years	

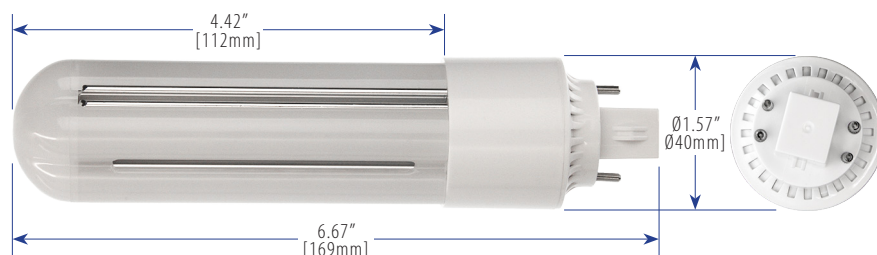

CAUTIONS

- Only for installations where lamp is oriented vertically, with base inserted either up or down.
- Ballast bypass required.
- Not intended for totally enclosed fixtures.
- Surge protection recommended.

GX24Q Base / 12 Watts

**11 Watts,
Replaces CFLs up to 23W
in Omnidirectional Applications**



**4-Pin GX24Q
Universal Base**

LDLGX24QU-12WF-XNW-101A

Input Power	11 Watts
Input Voltage	100~277VAC (Tested @ 120VAC)
Input Current	0.090A
Max. Candela	105 cd
Total Lumens	960 lm
Efficacy	85 lm/W
Power Factor	0.99
Emitted Color	Natural White
Color Temperature	4000K~4500K
CRI	≥80
Beam Angle	360° Omnidirectional
Oper. Temperature	-40°F to +122°F / -40°C to +50°C
Protection Rating	IP64
Base	4-Pin GX24Q / Polycarbonate / White
Heatsink	Aluminum / Silver Color
Lens	Polycarbonate / Frosted White
Dimensions	6.62 x Ø1.57 inch / 168 x Ø40 mm
Net Weight	0.3125 lbs / 5.0 oz / 142 g
Warranty	5 Years

