



LED GU10 Dimmable Light Bulb, 6 Watts

Replaces Halogen Lamps up to 50W – 40° Beam – GU10 Base – 2700K White



FEATURES

- 3 Year LEDtronics Warranty
- Directly Replaces 50W Halogen MR16/GU10 Bulbs
- Energy Savings of up to 90%
- Lumen Maintenance over 70% @ 25,000+ Hours
- Operates on 120VAC, Instant On/Off, No Power Surge
- Dimmable with Standard MR16 Dimmers
- High CRI Enhances All Colors
- High-Intensity, Even Light Output, No Halation
- No UV or IR Radiation, No RF, No Mercury
- Solid-State: High Shock & Vibration Resistant
- UL/cUL Listed (E469977 – EP16-1020E)

APPLICATIONS

- Recessed & Track Lighting
- Spot & Display Lighting
- Architectural Lighting
- Cabinet / Kiosk Lighting
- Art Gallery & Museum Spot Lighting
- Retail, Offices, Hospitality Lighting

Over 30 Years of LEDtronics Design, Engineering & Manufacturing Experience




40° Beam

GU10
Bi-pin

GU10-6W-XHW-101AMD

Input Power	6.6 Watts
Input Voltage	120VAC
Input Current	0.060A
Total Lumens	445 lm
Power Factor	0.96
Efficacy	70 lm/W
Max. Candela	845 cd
Illumination Angle	40°
CRI	80
Color Temperature	2700K
Emitted Color	Halogen White
Base Type	GU10
Operating Temperature	-4°F to +40°F / -20°C to +40°C
Heatsink	Cast-Aluminum / White
Body	Polycarbonate / White
Lens	Polycarbonate / Clear
Dimensions	2.33 x Ø1.94 inch / 59.1 x Ø49.3 mm
Net Weight	2.4 oz / 68 g

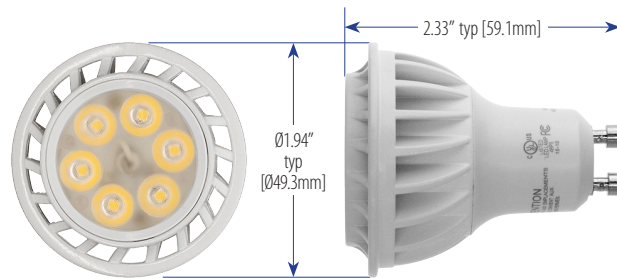

LEDTRONICS®

America's Premium Brand LED Company™



23105 Kashiwa Court, Torrance, CA 90505
Phone: (800) 579.4875 / (310) 534.1505

Fax: (310) 534.1424

E-mail: info@ledtronics.com

Website: ledtronics.com



© 2017 LEDtronics, Inc.

To order LEDtronics products,
contact the Distributor or Sales Representative in your area.

Visit our website to find your local Distributor or Representative from our worldwide network:

LEDtronics.com

WWW.LEDTRONICS.COM

LOG 603 / Rev 08-2017

Check LEDTRONICS.COM for latest data.
Printed material may be outdated.

Luminaire Photometric Report

Filename: GU10-6W-XHW-101AMD

Manufacturer: LEDTRONICS

Luminaire: CLEAR LENS,6.6W,120VAC

Lamp Output: 1 lamp, rated Lumens/lamp: 446.8

Max Candela: 847.0 at Horizontal: 22.5°, Vertical: 0°

Luminous Opening: Point

Test: 8-16-17

Photometry : Type C

CIE Class: Direct

Cutoff Class: Full Cutoff

Nema Type: 5 X 5

Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	68.8	15.4%	90-100	0	0%
10-20	137.0	30.7%	100-110	0	0%
20-30	113.9	25.5%	110-120	0	0%
30-40	61.7	13.8%	120-130	0	0%
40-50	28.7	6.4%	130-140	0	0%
50-60	16.9	3.8%	140-150	0	0%
60-70	11.6	2.6%	150-160	0	0%
70-80	6.5	1.5%	160-170	0	0%
80-90	1.7	0.4%	170-180	0	0%

