



LED Exit Sign T6 Bulbs

Only 1.5 Watts, Replaces Incandescents up to 20W – E12, E17 Screw Base or 15mm DC Bayonet



FEATURES

- 5 Year Lamp Warranty
- Up to 90% Energy Reduction over Incandescents
- Long Lifespan: White LEDs up to 100,000 Hours
- Solid State – Shock & Vibration Resistant
- High Lumen / High Efficacy
- UL V-0 Rated, Semi-Frosted Polycarbonate Tube
- Wide Oper. Temperature Range: -22°F to 122°F

APPLICATIONS

- Compatible with Most Standard Single or Double-Sided EXIT Signs
- Decorative & Accent Lighting
- Picture Lights

AVAILABLE OPTIONS

- Other Colors, Voltages & Base Types



Over 35 Years of LEDtronic Design, Engineering & Manufacturing Experience



E12 Base

EXLT6-4E12-XIW-002 (Warm White)
EXLT6-4E12-XNW-002 (Natural White)

	XIW	XNW
Color Temperature	2800K~3300K	3800K~4300K
Emitted Color	Warm White	Natural White
Input Power	1.5 Watts	
Input Voltage	120VAC	
Input Current	0.032A	0.035A
Efficacy	100 lm/W	120 lm/W
Lumens	150 lm	180 lm
Power Factor	0.34	
Illumination Angle	250° Double Side	
Oper. Temperature	-22°F ~+122°F / -30°C ~+50°C	
Base	E12 Candelabra Screw	
Tube Material	Polycarbonate (UL V-0 Rating)	
Tube Color	Clear Semi-Frosted	
Dimensions	4.13 x 0.98 inch / 105 x 25 mm	
Net Weight	0.64 oz / 18.14 g	



LEDTRONICS®

America's Premium Brand LED Company™



23105 Kashiwa Court, Torrance, CA 90505
 Phone: (800) 579.4875 / (310) 534.1505
 Fax: (310) 534.1424
 E-mail: info@ledtronics.com
 Website: ledtronics.com



© 2018 LEDtronic, Inc.

To order LEDtronic products, contact the Distributor or Sales Representative in your area.

Visit our website to find your local Distributor or Representative from our worldwide network:

LEDtronic.com

WWW.LEDTRONICS.COM

LOG 617 / Rev 07-2018

Check LEDTRONICS.COM for latest data. Printed material may be outdated.


LED Exit Sign T6 Bulbs – E17 Screw Base



E17 Base

- EXLT6-4E17-XHW-002** (Halogen White)
- EXLT6-4E17-XNW-002** (Natural White)
- EXLT6-4E17-XPW-002** (Pure White)

	XHW	XNW	XPW
Color Temperature	2800K~3300K	3800K~4300K	5500K~6500K
Input Power	1.5 Watts		
Input Voltage	120VAC		
Input Current	0.032A		
Efficacy	100 lm/W	120 lm/W	120 lm/W
Lumens	150 lm	180 lm	180 lm
Illumination Angle	250° Double Side		
Oper. Temperature	-22°F ~+122°F / -30°C ~+50°C		
Base	E17 Intermediate Screw		
Tube Material	Polycarbonate (UL V-0 Rating)		
Tube Color	Clear Semi-Frosted		
Dimensions	4.13 x 0.98 inch / 105 x 25 mm		
Net Weight	0.64 oz / 18.14 g		

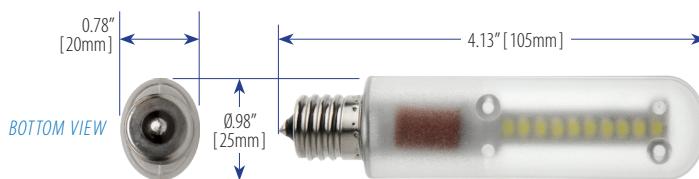

LED Exit Sign T6 Bulbs – Ba15d Bayonet Base



Ba15d Double Contact Bayonet Base

- EXLT6-4BA15D-XNW-002**

Input Power	1.3 Watts
Input Voltage	120VAC
Input Current	0.035A
Efficacy	185 lm/W
Lumens	188-202 lm
Power Factor	0.34
Emitted Color	Natural White
Color Temperature	3800K~4300K
Illumination Angle	250° Double Side
Oper. Temperature	-4°F ~+122°F / -20°C ~+50°C
Base	Ba15d Dual-Contact Bayonet
Tube Material	Polycarbonate (UL V-0 Rating)
Tube Color	Clear Semi-Frosted
Dimensions	4.25 x 0.98 inch / 108 x 25 mm
Net Weight	0.64 oz / 18.14 g

