



# LED 1.5W Filament Bulb, 12V AC/DC, COB

High-Lumen – 3000K/4000K/5500K White – Omnidirectional Beam – Dual-Pin G4 Base



## FEATURES

- 2 Year LEDtronics U.S. Warranty
- Up to 90% Energy Reduction over Halogens, Incandescents
- Long Lifespan: White LED Lumen Maintenance >70% at 50,000 Hours – Reduces Re-lamp Frequency
- Solid State – High Shock & Vibration Resistant
- Compact Bulb Fits in Enclosed Fixtures & Tight Spaces
- High Lumen, High Efficacy, Instant-on, No Flickering
- Omnidirectional: No-Shadow Beam, Even Light
- Clear Polycarbonate Lens / 2x COB Filament LEDs
- Wide Operating Temperature Range: -30°C to +50°C
- Minimal Heat Generation, No UV or IR, No RF Interference
- Eco-Friendly: No Toxic Metals – RoHS Compliant



## APPLICATIONS

- Replaces 12-14V G4 Incandescent Lamps: 773 (8W) / 774 (8W) / 783 (12W) / 789 (14W) / 790 (25W) / 891 (8W)
- Pendant Lamps
- Under-Cabinet Lighting
- Landscape Lighting
- Electric Signs, Scoreboards
- Step Lights, Puck Downlights
- RVs, Boats, Car Bulbs

## AVAILABLE OPTIONS

- Other Miniature & Subminiature Bases: E12, E14, E17, Ba15s, etc.

Over 35 Years of LEDtronics Design, Engineering & Manufacturing Experience

Only 1.5 Watts, Replaces Xenon & Halogen T2/T3/T4 Tubular G4 Bi-Pin Bulbs of up to 15 Watts



LEDG4BPF-1.5W-XIW-012V (Warm White)  
LEDG4BPF-1.5W-XPW-012V (Pure White)


	XIW	XPW
Color Temperature	2800K~3200K	5000K~6000K
Input Power	1.1~1.5 Watts	1.5 Watts
Input Voltage	12V AC/DC	
Input Current	102mA~125mA	-
Efficacy	100 lm/W	
Lumens	98~150 lm	120~150 lm
Power Factor	>0.9	
Illumination Angle	360° Omnidirectional	
CRI	80	
Base	G4 Subminiature Bi-Pin, Bipolar	
Lens	Polycarbonate, Clear	
Dimmability	Not Dimmable	
Oper. Temperature	-22°F ~+122°F / -30°C ~+50°C	
Dimensions	1.54 x Ø0.383 inch / 39.1 x Ø9.7 mm	
Net Weight	0.14 oz / 4g	




LEDG4BPF-1.5W-XNW-012V (Natural White)

Color Temperature	3800K~4500K
Input Power	1.5 Watts
Input Voltage	12V AC/DC
Input Current	0.109A
Efficacy	100 lm/W
Lumens	120~150 lm
Max. Candela	13.6 cd
Power Factor	>0.9
Illumination Angle	360° Omnidirectional
CRI	>80
Base	G4 Subminiature Bi-Pin, Bipolar
Lens	Polycarbonate / Clear
Dimmability	Not Dimmable
LED	2 pcs, COB Filament
Oper. Temperature	-22°F ~+122°F / -30°C ~+50°C
Dimensions	1.54 x Ø0.42 inch / 39.1 x Ø10.6 mm
Net Weight	0.14 oz / 4g

G4 Bi-Pin, Bipolar Base



ACTUAL SIZE

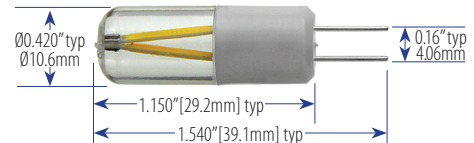

# LEDTRONICS®

America's Premium Brand LED Company™



© 2020 LEDtronics, Inc.



23105 Kashiwa Court, Torrance, CA 90505  
 Phone: (800) 579.4875 / (310) 534.1505  
 Fax: (310) 534.1424  
 E-mail: info@ledtronics.com  
 Website: ledtronics.com

To order LEDtronics products, contact the Distributor or Sales Representative in your area.

Visit our website to find your local Distributor or Representative from our worldwide network:

**LEDtronics.com**

WWW.LEDTRONICS.COM

LOG 640 / Rev 08-2020

Check LEDTRONICS.COM for latest data. Printed material may be outdated.