



LED Filament-Look Dimmable Bulbs, E26 Base

2 to 5 Watts – 120VAC – 2200K or 2700K White – Omnidirectional Beam – Clear or Frosted Lens



All lamps feature phosphor LED filaments evenly spaced on a sapphire bracket that is attached to a precision-guided lamp post in a vacuum-sealed and insulated environment

FEATURES

- 3 Year LEDtronics Warranty
- Directly Replaces Incandescent, Halogen & CFL Bulbs in E26 Base Fixtures
- Lumen Maintenance over 70% @ 25,000+ Hours
- Energy Savings of up to 85%
- Dimmable Only with Low-Wattage LED Dimmers (such as Lutron DVCL-153P Diva)
- High Lumen, High CRI, Low Glare
- No UV/IR, No RF Interference
- High-Shock, Impact & Vibration Resistant
- UL/cUL Listed: E476884
- Eco-Friendly – RoHS Compliant

APPLICATIONS

- Chandeliers
- Wall Sconces
- Architectural Lighting
- Accent Lighting
- Suitable for Damp Locations

AVAILABLE OPTIONS

- Other Color Temperatures
- Other Wattages & Voltages
- Other Base Sizes, Milky White Lens

Over 35 Years of LEDtronics Design, Engineering & Manufacturing Experience

BLUNT TIP

- FILB11-2WE26C-XFW-101
- FILB11-2WE26C-XHW-101
- FILB11-2WE26C-XPW-101
- FILB11-2WE26F-XFW-101
- FILB11-2WE26F-XHW-101
- FILB11-4WE26C-XFW-101
- FILB11-4WE26C-XHW-101
- FILB11-4WE26F-XFW-101
- FILB11-4WE26F-XHW-101
- FILB11-6WE26C-XHW-101



	2WE26C-XFW	2WE26C-XHW	2WE26C-XPW	2WE26F-XFW	2WE26F-XHW	4WE26C-XFW	4WE26C-XHW	4WE26F-XFW	4WE26F-XHW	6WE26C-XHW
Color	Filament White	Halogen White	Pure White	Filament White	Halogen White	Filament White	Halogen White	Filament White	Halogen White	Halogen White
CCT	2200K±250K	2700K±250K	5000K±300K	2200K±250K	2700K±250K	2200K	2700K	2200K	2700K	2700K
Input Power	1.5W±0.3 Watts	1.5W±0.3 Watts	1.5W±0.3 Watts	1.5±0.3 Watts	1.5±0.3 Watts	3 Watts	4 Watts	3 Watts	3 Watts	5 Watts
Input Voltage	120VAC									
Input Current	0.014A	0.012A	0.016A	0.012A	0.016A	0.033A	0.034A	0.033A	0.033A	0.045A
Total Lumens	110±5% lm	140±5% lm	160±5% lm	100±5% lm	130±5% lm	281 lm	373 lm	286 lm	394 lm	510 lm
Efficacy	58-96 lm/W	74-123 lm/W	85-140 lm/W	53-88 lm/W	69-114 lm/W	85 lm/W	107 lm/W	87 lm/W	119 lm/W	110 lm/W
Power Factor	0.8									
CRI	>90	>80	>80	>90	>80	>80	>80	>80	>80	>80
Beam Angle	Omnidirectional									
Blunt Tip Lens	Clear Glass	Clear Glass	Clear Glass	Frosted Glass	Frosted Glass	Clear Glass	Clear Glass	Frosted Glass	Frosted Glass	Clear Glass
LED Filaments	2	2	2	2	2	4	4	4	4	6
Base	E26 Edison									
Oper. Temp.	-40°F ~ 122°F / -40°C ~ 50°C									
Protoc. Rating	IP50 (Dust Protected)									
Dimensions	3.56" x 0.1.38" inch / 90 x 035 mm									
Net Weight	0.8 oz / 22.7 g									

WWW.LEDTRONICS.COM

LOG 648 / Rev 07-2020

Check LEDTRONICS.COM for latest data. Printed material may be outdated.

LEDTRONICS®

America's Premium Brand LED Company™



23105 Kashiwa Court, Torrance, CA 90505
Phone: (800) 579.4875 / (310) 534.1505

Fax: (310) 534.1424

E-mail: info@ledtronics.com

Website: ledtronics.com



© 2018 LEDtronics, Inc.

To order LEDtronics products, contact the Distributor or Sales Representative in your area.

Visit our website to find your local Distributor or Representative from our worldwide network:

LEDTRONICS.COM


LED Filament-Look Dimmable Bulb, E26 Base: **Flame Tip, 5 Watts**

FLAME TIP



FILCA10-6WE26C-XHW-101

Input Power	5 Watts
Input Voltage	120VAC
Input Current	0.045A
Total Lumens	510 lm
Efficacy	110 lm/W
Power Factor	0.8
CRI	>80
Color	Halogen White
Color Temperature	2700K
Beam Angle	300° Omnidirectional
Lens	Clear Glass
LEDs	6 LED Filaments
Base	E26 Edison Screw
Operating Temp.	-40°F ~122°F / -40°C ~50°C
Protection Rating	IP50 (Dust Protected)
Dimensions	3.50" x 0.125" / 89 x 032 mm
Net Weight	0.8 oz / 22.7 g

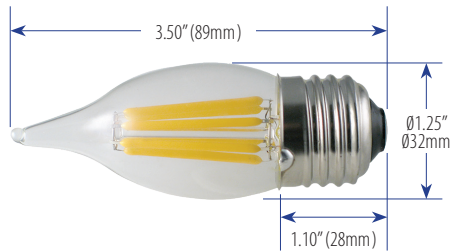

SAMPLE APPLICATIONS



OTHER AVAILABLE FILAMENT-STYLE LED LAMPS

