



LED Linear Indoor/Outdoor High Bay Lights

3, 4 & 5 ft – 150, 200 & 240 Watts – 100~277VAC – Dimmable – Surface Mount – Water-Resistant



FEATURES

- 5 Year LEDtronics Warranty
- Energy Savings up to 70%, Title 24 Compliant
- Lumen Maintenance over 70% @ 50,000 Hours
- IP66 Rated: No Dust Ingress, Protected from High-Pressure Water Jets from any Direction
- UV-Stabilized Polycarbonate Lens, Aluminum Body
- Dimmable 1-10 VDC, High Lumen, High CRI
- Mean Well HLG Internal Driver
- Instant-On Even Lighting, No Buzzing, No Flickering
- UL/cUL Listed (E330342)
- Solid State: High-Shock & Vibration Resistant
- No UV, No IR, No Toxic Mercury – RoHS Compliant
- LM79 Reports on File

APPLICATIONS

- Factory Floors / Warehouses
- Big-Box Stores / Supermarkets
- Shopping Malls, Convention Centers
- Parking Garages, Tunnels
- Gymnasiums, Indoor Arenas
- Libraries, Workshops

AVAILABLE OPTIONS

- Other Wattages: 50W & 100W (nondimmable)
- 4000K Natural White, 5700K Cool White and Other White Color Temperatures
- 90° Round Beam and 135°x70° Linear Beam Angles
- Pendant Mounting



40 Years of LEDtronics Design, Engineering & Manufacturing Experience



LEDTRONICS®

America's Premium Brand LED Company™



© 2023 LEDtronics, Inc.

23105 Kashiwa Court, Torrance, CA 90505

Phone: (800) 579.4875 / (310) 534.1505

Fax: (310) 534.1424

E-mail: info@ledtronics.com

Website: ledtronics.com



To order LEDtronics products, contact the Distributor or Sales Representative in your area.

Visit our website to find your local Distributor or Representative from our worldwide network:



LEDtronics.com

WWW.LEDTRONICS.COM

LOG 665 / Rev 01-2023

Check LEDTRONICS.COM for latest data. Printed material may be outdated.

LED Linear Indoor/Outdoor Dimmable High Bay Lights – 3 ft, 150 Watts

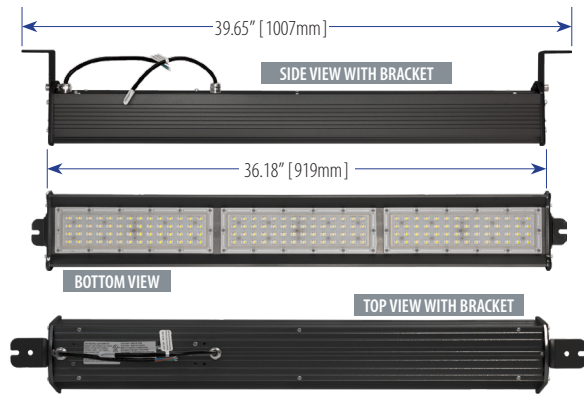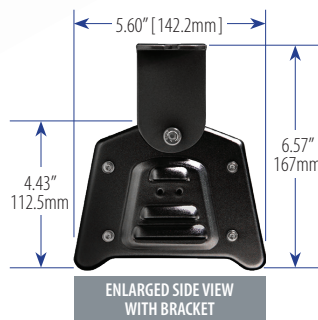


**154 Watts, Replaces
MH/HPS Lamps up to 600W**

LHB001-150W-XPW-101D-B

Input Power	153.7 Watts
Input Voltage	100~277VAC (Tested @120VAC)
Input Current	1.28A
Total Lumens	20129 lm
Efficacy	130.96 lm/W
Max. Candela	17297 cd
Power Factor	0.93
Viewing Angle	100° x 65°
Color Temp.	5000K
Emitted Color	Pure White
CRI	74
Dimmability	0-10 VDC, Continuous
Heatsink	Aluminum, Black Surface Finish
Lens	Polycarbonate, Clear
Protection Rating	IP66
Operating Temp.	-4°F ~113°F / -20°C~45°C
Dimensions	L36.18 x W5.60 x H4.43 inch L919 x W142.2 x H112.5 mm
Net Weight	13.44 lbs / 6.0 kg



LED LM80 Report on File

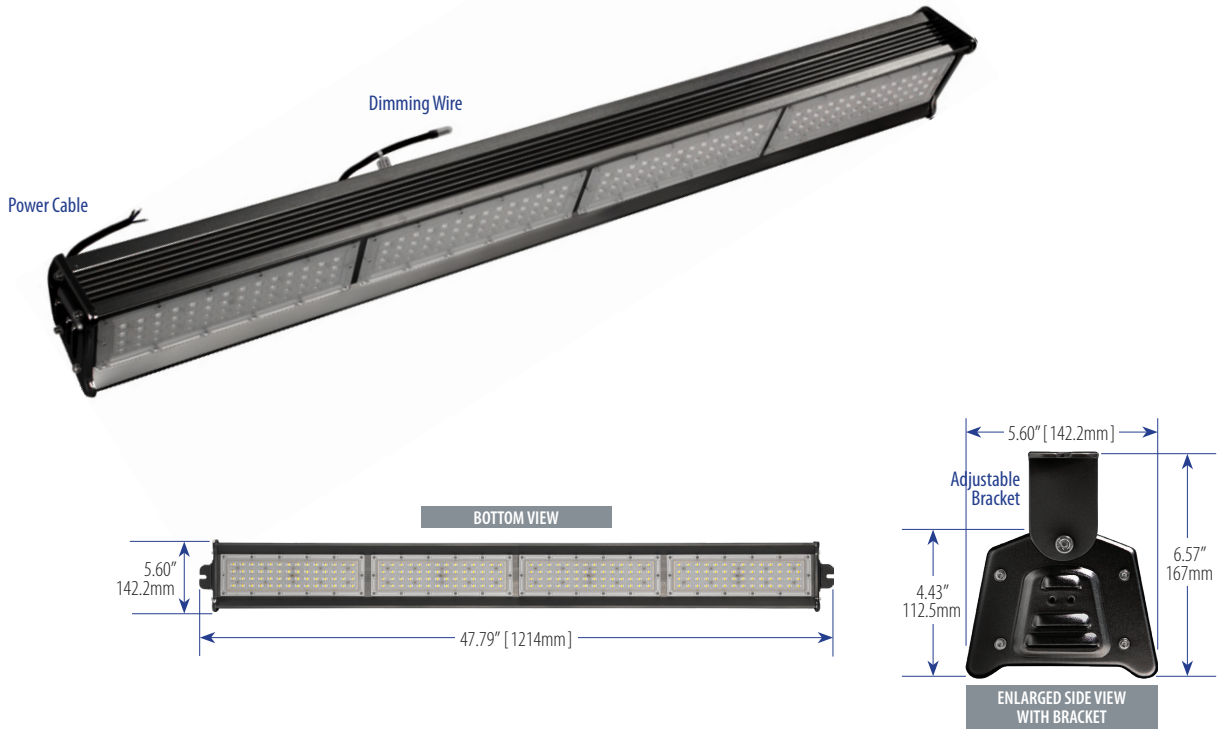


**214 Watts, Replaces
MH/HPS Lamps up to 750W**

LHB001-200W-XPW-101D-B	
Input Power	214.1 Watts
Input Voltage	100~277VAC (Tested @120VAC)
Total Lumens	27731 lm
Efficacy	130 lm/W
Power Factor	0.93
Viewing Angle	100° x 65°
Color Temp.	5000K
Emitted Color	Pure White
CRI	74
Dimmability	1-10 VDC, Continuous
Heatsink	Aluminum, Black Surface Finish
Lens	Polycarbonate, Clear
Protection Rating	IP66
Operating Temp.	-4°F ~113°F / -20°C~45°C
Dimensions	L47.79 x W5.60 x H4.43 inch L1214 x W142.2 x H112.5 mm
Net Weight	16.75 lbs / 7.6 kg



LED Linear Indoor/Outdoor Dimmable High Bay Lights – 5 ft, 240 Watts

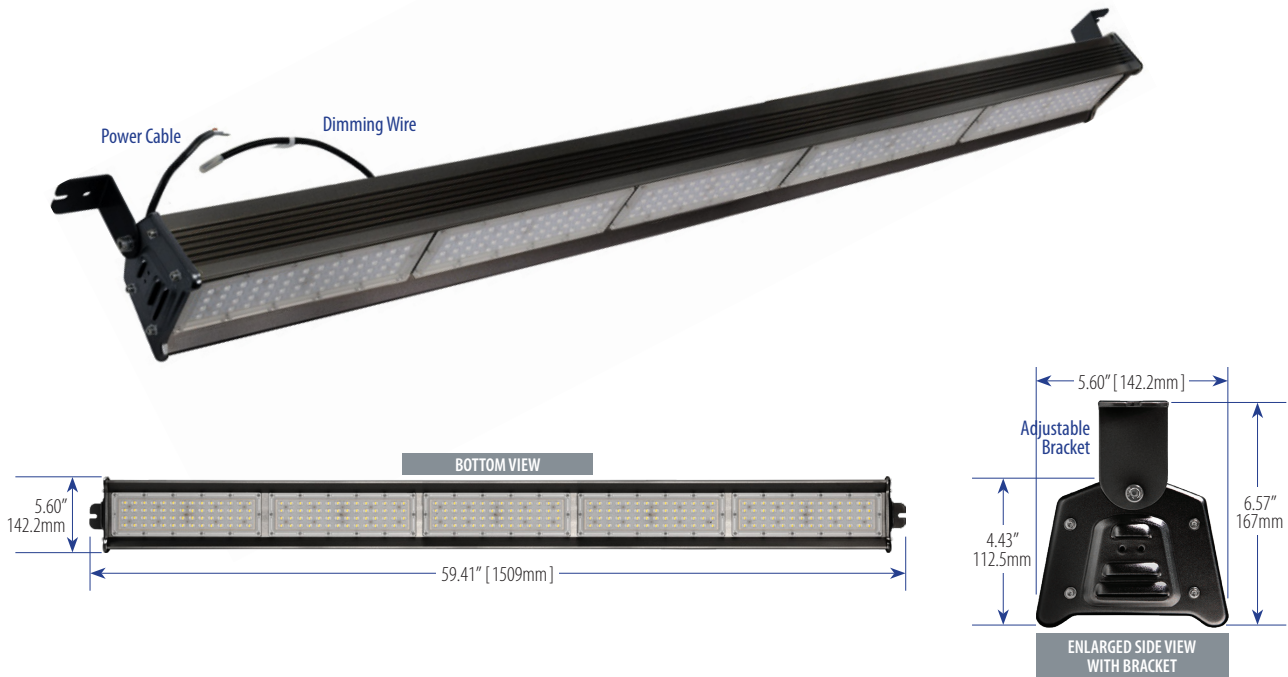

**238 Watts, Replaces
MH/HPS Lamps up to 1000W**

LHB001-240W-XPW-101D-B	
Input Power	238.5 Watts
Input Voltage	100~277VAC (Tested @120VAC)
Total Lumens	30552 lm
Efficacy	128 lm/W
Power Factor	0.94
Viewing Angle	100° x 65°
Color Temp.	5000K
Emitted Color	Pure White
CRI	74
Dimmability	1-10 VDC, Continuous
Heatsink	Aluminum, Black Surface Finish
Lens	Polycarbonate, Clear
Protection Rating	IP66
Operating Temp.	-4°F ~113°F / -20°C~45°C
Dimensions	L59.41 x W5.60 x H4.43 inch L1509 x W142.2 x H112.5 mm
Net Weight	19.84 lbs / 9.0 kg

