



Recessed Retrofit LED 4" & 6" Downlight, Dimmable

11, 13 & 21 Watts, Replaces CFLs up to 65W, Halogens up to 125 W – 120VAC – 90° Cutoff Beam



FEATURES

- 5 Year LEDtronics Warranty
- Direct Retrofit into Recessed 4", 5" or 6" Aperture Housings
- Energy Savings of up to 80%
- Standard E26 Edison Screw Base Adapter
- Lumen Maintenance over 70% @ 40,000+ Hours
- Compatible w/ Most Triac Phase-Control Dimmers
- No UV/IR Radiation, No Toxic Mercury, RoHS Compliant
- ETL/cETL Listed: 5002143 (KDN-BA-1x-M1xW-90)
- Available Adapter Option: GU10 / GU24 Base

APPLICATIONS

- Ceiling Installations for General Ambient Lighting in Homes, Offices & Public Facilities
- Retail Store Lighting
- Museums, Galleries, Showrooms
- Hotels, Hospitality Areas
- Hospitals, Clinics, Workrooms
- Corridors, Lobbies, Stairways



Over 35 Years of LEDtronics Design, Engineering & Manufacturing Experience

11 Watts, Replaces Halogen Lamps up to 65W



RDL32L-4-10W-XIW-101D

Input Power	10.88 Watts
Input Voltage	120VAC (Tested @ 120VAC)
Input Current	0.098A
Total Lumens	736.47 lm
Efficacy	68 lm/W
Max. Candela	316 cd
Power Factor	≥0.9
LED Emitted Color	Warm White
Color Temperature	3000K
CRI	≥90
Beam Angle	90°
Housing	Aluminum / White
Lens	Polycarbonate / Frosted White
Trim Type / Color	Baffle / White
Base	E26 Medium Screw
Oper. Temp.	-10°C ~ +45°C / 14°F ~ +113°F
Dimensions	WØ5.36 x H2.71 inch – WØ136 X H68.8 mm
Weight	0.43 lbs / 0.195 kg



Kit includes 1 Neoprene Gasket

LEDTRONICS®

America's Premium Brand LED Company™



23105 Kashiwa Court, Torrance, CA 90505
 Phone: (800) 579.4875 / (310) 534.1505
 Fax: (310) 534.1424
 E-mail: info@ledtronics.com
 Website: ledtronics.com

To order LEDtronics products, contact the Distributor or Sales Representative in your area.

Visit our website to find your local Distributor or Representative from our worldwide network:


LEDtronics.com

WWW.LEDTRONICS.COM

LOG 700 / Rev 04-2017

Check LEDTRONICS.COM for latest data. Printed material may be outdated.

LED Dimmable Downlight Luminaires: 6 inch / 13 & 21 Watts

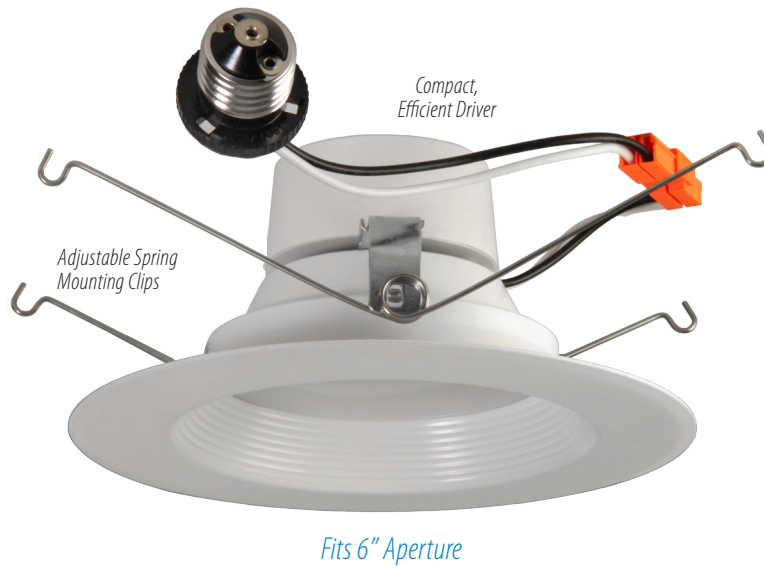

13 Watts, Replaces Halogen Lamps up to 65W

RDL32L-6-12W-XIW-101D

Input Power	13.29 Watts
Input Voltage	120VAC (Tested @ 120VAC)
Input Current	0.119A
Total Lumens	909.75 lm
Efficacy	68 lm/W
Max. Candela	395 cd
Power Factor	≥0.9
LED Emitted Color	Warm White
Color Temperature	3000K
CRI	≥90
Beam Angle	90°
Housing	Aluminum / White
Lens	Polycarbonate / Frosted White
Trim Type / Color	Baffle / White
Base	E26 Medium Screw
Oper. Temp.	-10°C ~+45°C / 14°F ~+113°F
Dimensions	WØ7.23 x H3.35 inch WØ184 X H85.0 mm
Weight	0.71 lbs / 0.322 kg



21 Watts, Replaces Halogen Lamps up to 125W

RDL32L-6-18W-XIW-101D

Input Power	20.72 Watts
Input Voltage	120VAC (Tested @ 120VAC)
Input Current	0.178A
Total Lumens	1311.5 lm
Efficacy	63 lm/W
Max. Candela	567 cd
Power Factor	≥0.9
LED Emitted Color	Warm White
Color Temperature	3000K
CRI	≥90
Beam Angle	90°
Housing	Aluminum / White
Lens	Polycarbonate / Frosted White
Trim Type / Color	Baffle / White
Base	E26 Medium Screw
Oper. Temp.	-10°C ~+45°C / 14°F ~+113°F
Dimensions	WØ7.23 x H3.35 inch WØ184 X H85.0 mm
Weight	0.72 lbs / 0.326 kg

