



LED A19 Dimmable Light Bulb, Frosted

9 & 10 Watts – 120VAC – 3000K Warm White – GU24 Bipin Base – Dimmable



FEATURES

- 3 Year LEDtronics Warranty
- Direct Retrofit into GU24 Base Fixtures
- Energy Savings of up to 80%
- Long Lifespan: 25,000 Hours
- Operates on 120VAC, Instant On/Off, No Power Surge
- Dimmable with Triac Dimmers, 20-100% Intensity
- Omnidirectional Beam Pattern, High CRI
- High-Intensity, Even Light Output, No Halation
- No UV or IR Radiation, No RF, No Mercury
- Solid-State: High Shock & Vibration Resistant
- UL/cUL Listed (E479058 - SPSA19GU24D9XX)

APPLICATIONS

- Architectural & Décor Lighting
- Table Lamps / Task Lights
- Store Front Displays, Retail Display Cases, Signage
- Exhibit Set-ups
- Accent Lighting & Sconces
- Ceiling Down Lights
- Suitable for Damp Locations

Over 35 Years of LEDtronics Design, Engineering & Manufacturing Experience

Only 9~9.5 Watts, Replaces Halogen Lamps up to 60 Watts

Frosted Lens



GU24 Base

Omnidirectional 320° Beam

A19GU24F-09W-XIW-101AD (9 Watts)
A19GU24F-10W-XIW-101AD (9.5 Watts)

	09W	10W
Input Power	9 Watts	9.5 Watts
Input Voltage	120VAC	
Input Current	0.08A	
Total Lumens	1100 lm	1085 lm
Power Factor	0.94	0.97
Efficacy	122 lm/W	115 lm/W
Max. Candela	160 cd	155 cd
Illumination Angle	320°	
CRI	80	
Emitted Color	Warm White	
Color Temperature	3000K	
Dimmability	Dimmable 20-100%	
Heatsink	Polycarbonate / White	
Lens	Polycarbonate / Frosted White	
Base Type	Bi-Pin GU24 Twist & Lock	
Oper. Temperature	-13°F ~+194°F / -25°C ~+90°C	
Dimensions	3.74 x Ø2.36 inch / 95 x Ø60 mm	
Net Weight	0.15 lb / 68g	0.37 lb / 168g



LM80 Report On File



LEDTRONICS®

America's Premium Brand LED Company™



© 2019 LEDtronics, Inc.

23105 Kashiwa Court, Torrance, CA 90505
Phone: (800) 579.4875 / (310) 534.1505
Fax: (310) 534.1424

E-mail: info@ledtronics.com
Website: ledtronics.com



To order LEDtronics products, contact the Distributor or Sales Representative in your area.

Visit our website to find your local Distributor or Representative from our worldwide network:

LEDtronics.com


WWW.LEDTRONICS.COM

LOG 716 / Rev 10-2019

Check LEDTRONICS.COM for latest data. Printed material may be outdated.

PHOTOMETRIC REPORT:


A19GU24F-09W-XIW-101AD

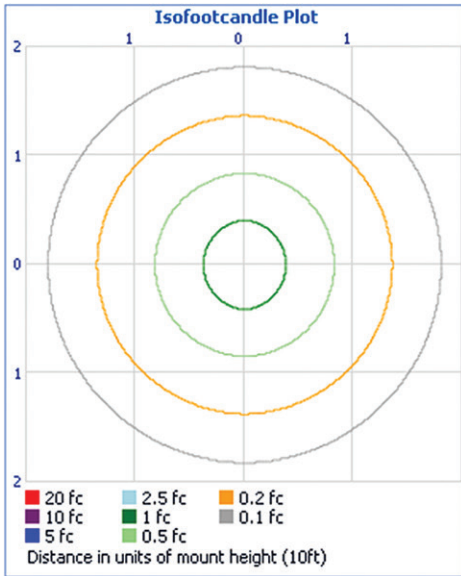

Filename: A19GU24F-09W-XIW-101AD
 Manufacturer: LEDTRONICS
 Luminaire: FROSTED LENS,9.3W,120VAC
 Lamp Output: 1 lamp, rated Lumens/lamp: 773.5
 Max Candela: 136.0 at Horizontal: 0°, Vertical: 0°
 Luminous Opening: Point
 Test: 5-24-17
 Photometry : Type C
 CIE Class: Semi-Direct
 Cutoff Class: Noncutoff


Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	104.6	13.5%	13.5%
0-40	175.7	22.7%	22.7%
0-60	341.1	44.1%	44.1%
60-90	228.5	29.5%	29.5%
70-100	203.3	26.3%	26.3%
90-120	141.3	18.3%	18.3%
0-90	569.7	73.6%	73.6%
90-180	203.9	26.4%	26.4%
0-180	773.5	100%	100%

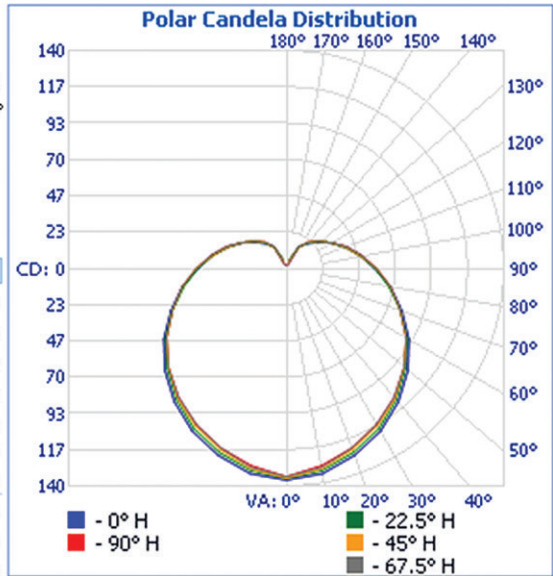

PHOTOMETRIC REPORT:

A19GU24F-10W-XIW-101AD

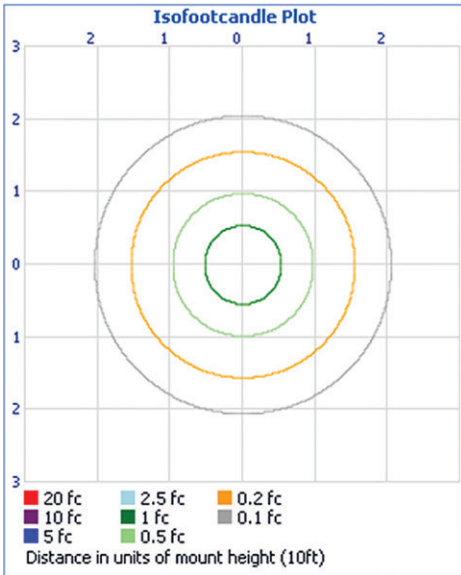

Filename: A19GU24F-10W-XIW-101AD
 Manufacturer: LEDTRONICS
 Luminaire: FROSTED LENS,9.5W,120VAC
 Lamp Output: 1 lamp, rated Lumens/lamp: 1084.4
 Max Candela: 154.0 at Horizontal: 0°, Vertical: 0°
 Luminous Opening: Point
 Test: 5-22-17
 Photometry : Type C
 CIE Class: Semi-Direct
 Cutoff Class: Noncutoff

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	125.1	11.5%	11.5%
0-40	214.5	19.8%	19.8%
0-60	434.5	40.1%	40.1%
60-90	331.2	30.5%	30.5%
70-100	303.3	28%	28%
90-120	219.4	20.2%	20.2%
0-90	765.7	70.6%	70.6%
90-180	318.7	29.4%	29.4%
0-180	1,084.4	100%	100%

