# LED A19 Dimmable Light Bulb, Frosted, E26

*10 Watts, Replaces Incandescents up to 60 Watts – 120VAC – 3000K Warm White*

OVER 30 YEARS OF LED

## FEATURES

- 3 Year LEDtronics Warranty
- Direct Retrofit into E26 Edison Base Fixtures
- Energy Savings of up to 80%
- Long Lifespan: 25,000 Hours
- Operates on 120VAC, Instant On/Off, No Power Surge
- Dimmable with Triac Dimmers, 20-100% Intensity
- Omnidirectional Beam Pattern, High CRI
- High-Intensity, Even Light Output, No Halation
- No UV or IR Radiation, No RF, No Mercury
- Solid-State: High Shock & Vibration Resistant
- UL/cUL Listed (E479058 - SPSA19D09XX)

## APPLICATIONS

- Architectural & Décor Lighting
- Table Lamps / Task Lights
- Store Front Displays, Retail Display Cases, Signage
- Exhibit Set-ups
- Accent Lighting & Sconces
- Ceiling Down Lights
- Suitable for Damp Locations

***Over 30 Years of LEDtronics Design, Engineering & Manufacturing Experience***

**DEC-A19F-10W-XIW-101AD**

| | |
|---|---|
| Input Power | 9.5 Watts |
| Input Voltage | 120VAC |
| Input Current | 0.08A |
| Total Lumens | 1085 lm |
| Power Factor | 0.97 |
| Efficacy | 115 lm/W |
| Max. Candela | 155 cd |
| Illumination Angle | 320° |
| CRI | 80 |
| Emitted Color | Warm White |
| Color Temperature | 3000K |
| Heatsink | Polycarbonate / White |
| Lens | Polycarbonate / Frosted White |
| Base Type | E26 Edison Screw Base |
| Oper. Temperature | -13°F ~+194°F / -25°C ~+90°C |
| Dimmability | Dimmable 20-100% |
| Dimensions | 4.60 x Ø2.36 inch / 117 x Ø60 mm |
| Net Weight | 0.37 lb / 168g |

c UL us LISTED E479058

LM80 Report On File

RoHS COMPLIANT

ENERGY STAR

LEDTRONICS®
America's Premium Brand LED Company™

ISO 9001:2008 CERTIFIED by DNV

23105 Kashiwa Court, Torrance, CA 90505
Phone: (800) 579.4875 / (310) 534.1505
Fax: (310) 534.1424
E-mail: info@ledtronics.com
Website: ledtronics.com


© 2017 LEDtronics, Inc.

*To order LEDtronics products, contact the Distributor or Sales Representative in your area.*

Visit our website to find your local Distributor or Representative from our worldwide network:
LEDtronics.com


WWW.LEDTRONICS.COM

LOG 717 / Rev 10-2017

Check LEDTRONICS.COM for latest data. Printed material may be outdated

## Luminaire Photometric Report

**Filename:** DEC-A19F-10W-XIW-101AD
Manufacturer: LEDTRONICS
Luminaire: FROSTED LENS,9.5W,120VAC
Lamp Output: 1 lamp, rated Lumens/lamp: 1084.4
Max Candela: 154.0 at Horizontal: 0°, Vertical: 0°
Luminous Opening: Point
Test: 5-22-17
Photometry : Type C
CIE Class: Semi-Direct
Cutoff Class: Noncutoff

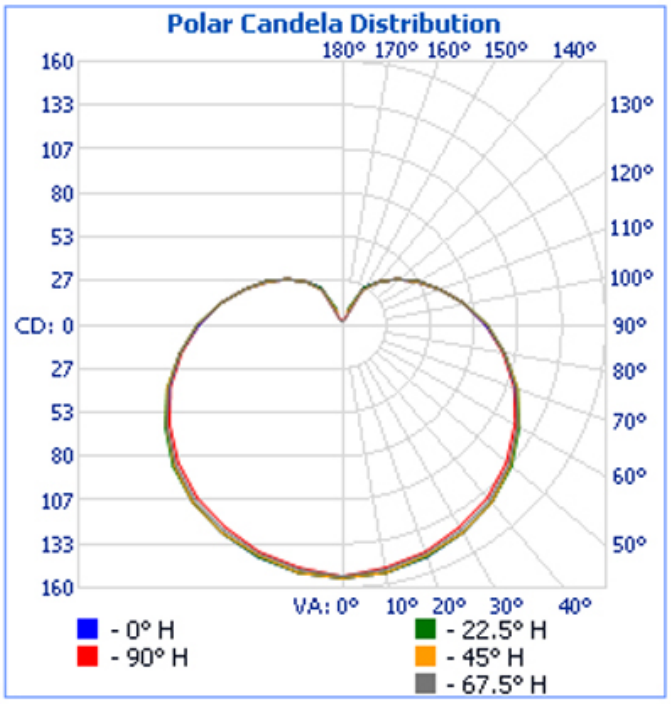


### Lumens Per Zone

| Zone | Lumens | % Total | Zone | Lumens | % Total |
|---|---|---|---|---|---|
| 0-10 | 14.6 | 1.3% | 90-100 | 88.8 | 8.2% |
| 10-20 | 42.6 | 3.9% | 100-110 | 73.1 | 6.7% |
| 20-30 | 67.9 | 6.3% | 110-120 | 57.5 | 5.3% |
| 30-40 | 89.4 | 8.2% | 120-130 | 43.0 | 4% |
| 40-50 | 105.4 | 9.7% | 130-140 | 30.0 | 2.8% |
| 50-60 | 114.5 | 10.6% | 140-150 | 18.7 | 1.7% |
| 60-70 | 116.7 | 10.8% | 150-160 | 7.7 | 0.7% |
| 70-80 | 112.2 | 10.3% | 160-170 | 0 | 0% |
| 80-90 | 102.3 | 9.4% | 170-180 | 0 | 0% |

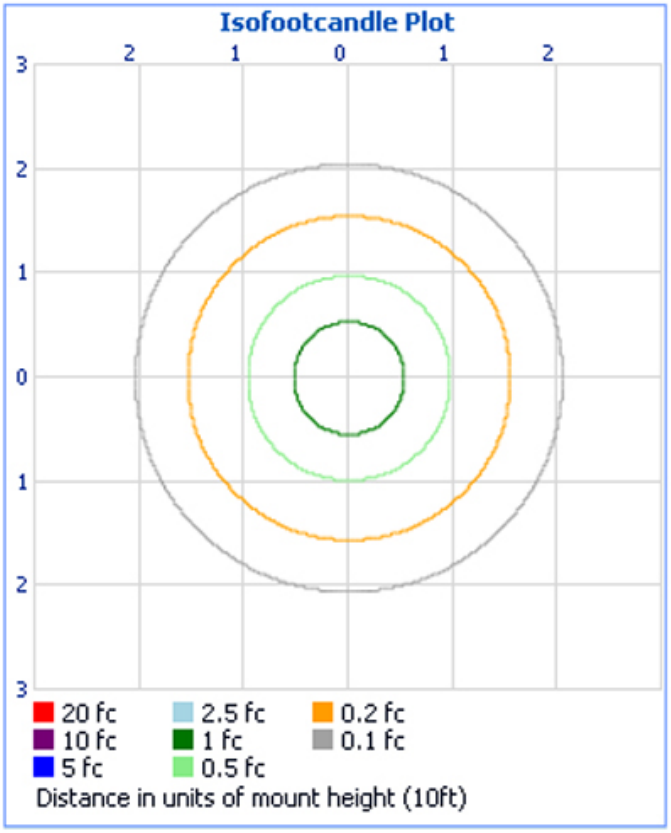


### Zonal Lumen Summary

| Zone | Lumens | % Lamp | % Luminaire |
|---|---|---|---|
| 0-30 | 125.1 | 11.5% | 11.5% |
| 0-40 | 214.5 | 19.8% | 19.8% |
| 0-60 | 434.5 | 40.1% | 40.1% |
| 60-90 | 331.2 | 30.5% | 30.5% |
| 70-100 | 303.3 | 28% | 28% |
| 90-120 | 219.4 | 20.2% | 20.2% |
| 0-90 | 765.7 | 70.6% | 70.6% |
| 90-180 | 318.7 | 29.4% | 29.4% |
| 0-180 | 1,084.4 | 100% | 100% |



© 2017 LEDtronics, Inc.

scmbdc® Southern California Minority Business Development Council

23105 Kashiwa Court, Torrance, CA 90505
Phone: (800) 579.4875 / (310) 534.1505
Fax: (310) 534.1424
E-mail: info@ledtronics.com
Website: ledtronics.com