



LED Walkway Post Top Fixture

50 & 100 Watts – 100~277VAC – 5000K White – Dimmable – 120° Type III Beam – IP65 – ETL



FEATURES

- 5 Year LEDtronics Warranty
- Energy Savings up to 85% over HID Lamps
- High Lumen & CRI, 120° Type III Offset Beam
- ETL Listed, IP65 Rated for Wet Locations
- Lumen Maintenance over 70% @ 50,000 Hours
- Stylish & Durable Housing with Anti-Corrosion Coating, High-Transmission PC Lens
- Easy to Install, Lightweight – Ideal for Load-Bearing Poles
- Internal Mean Well Driver
- No UV/IR, No Mercury or Lead, ROHS Compliant
- Solid State – High Shock/Vibration Resistant



APPLICATIONS

- Walkways & Pathways
- Parks, Theme Parks
- Sidewalks
- Outdoor Malls
- Parking Lots
- Playgrounds, Trails
- Campuses & Schools

AVAILABLE OPTIONS

- Other CCT Colors
- Other Wattages
- Type IV Beam Angle


Over 35 Years of LEDtronics Design, Engineering & Manufacturing Experience



PTF000-050W-XPW-101 (50 Watts, replaces MH/HPS up to 200W)

PTF000-100W-XPW-101 (100 Watts, replaces MH/HPS up to 400W)

	050W	100W
Input Power	50 Watts	100 Watts
Input Voltage	100~277VAC (Tested @ 120VAC)	
Input Current	0.42A	0.83A
Total Lumens	5000 lm	10000 lm
Efficacy	100 lm/W	100 lm/W
Power Factor	>0.9	
LED Emitted Color	Pure White	
Color Temperature	5000K	
CRI	≥70	
Illumination Angle	120°	
Dimmability	Dimmable 0-10V	
Protection Rating	IP65	
Housing	Aluminum Alloy / Bronze	
Lens	Polycarbonate	
Oper. Temperature	-40°F ~ +122°F / -40°C ~ +50°C	
Dimensions	H17.2 x W13.8 inch / H436.5 x W351.8 mm	
Weight	12.8 lbs / 5.8 kg	

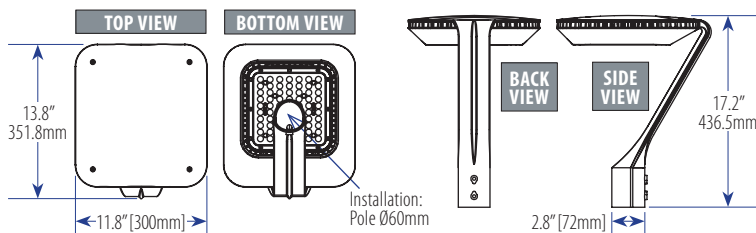

LEDTRONICS®

America's Premium Brand LED Company™



© 2018 LEDtronics, Inc.



23105 Kashiwa Court, Torrance, CA 90505
Phone: (800) 579.4875 / (310) 534.1505
Fax: (310) 534.1424
E-mail: info@ledtronics.com
Website: ledtronics.com

To order LEDtronics products,
contact the Distributor or Sales Representative in your area.

Visit our website to find your local Distributor or Representative from our worldwide network:

LEDtronics.com

Luminaire Photometric Report

Filename: PTF000-050W-XPW-101

Lamp Output: 1 lamp, rated Lumens/lamp: 4985.6

Max Candela: 3,071.9 at Horizontal: 45°, Vertical: 38°

Input Wattage: 48.7

Luminous Opening: Point

Test Date: 2016-08-15

Test Lab: EVERFINE

Photometry : Type C

CIE Class: Direct

Cutoff Class: Cutoff

Nema Type: 6 X 7



Lumens Per Zone

Zone	Lumens	% Total
0-10	69.2	1.4%
10-20	244.7	4.9%
20-30	511.8	10.3%
30-40	849.5	17.0%
40-50	1,019.1	20.4%
50-60	1,152.9	23.1%
60-70	842.1	16.9%
70-80	230.5	4.6%
80-90	65.7	1.3%

Illuminance at a Distance

	Center Beam fc	Beam Width
4.0ft	44.5 fc	8.2 ft 4.0 ft
8.0ft	11.1 fc	16.3 ft 8.0 ft
12.0ft	4.9 fc	24.5 ft 12.1 ft
16.0ft	2.8 fc	32.6 ft 16.1 ft
20.0ft	1.8 fc	40.8 ft 20.1 ft
24.0ft	1.2 fc	48.9 ft 24.1 ft

Vert. Spread: 91.1° Horiz. Spread: 53.4°

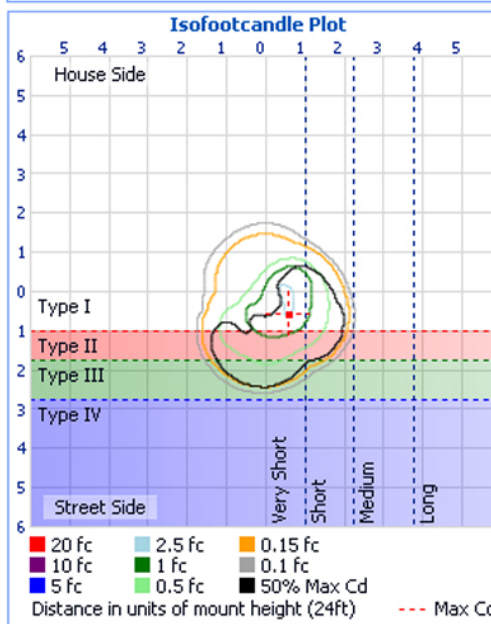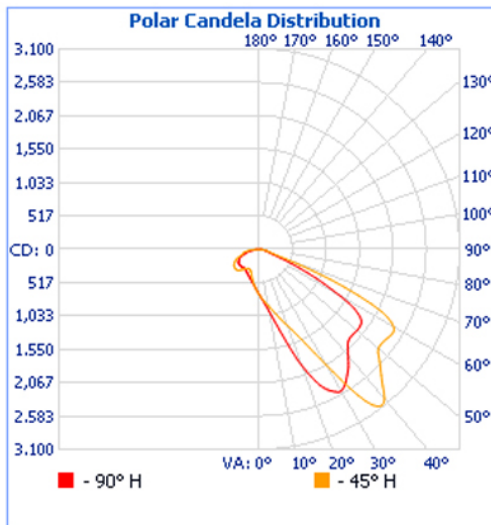

MOUNTING POLE ADAPTERS AVAILABLE For Different-Diameter Round or Square Poles




For Round Poles

4-in. [102mm] max. diameter
Part # PTF000-ADPT-4.0R-001



For Round Poles

4.5-in. [115mm] max. diameter
Part # PTF000-ADPT-4.5R-001



For Round Poles

5-in. [128mm] max. diameter
Part No.: PTF000-ADPT-5.0R-001



For Round Poles

6-in. [153mm] max. diameter
Part # PTF000-ADPT-6.0R-001

For Square Poles

4x4-in. [102mm] max. width:
Part No.: PTF000-ADPT-4.0S-001