



LED Parking Lot 'Parachute' Post Top Fixture

150, 200 & 300 Watts – 100~277VAC – 5000K White – Dimmable – Type III Beam Pattern – IP65 – ETL



FEATURES

- 5 Year LEDtronics Warranty
- Energy Savings up to 80% over HID Lamps
- High Lumen & CRI, Type III Full-Cutoff Beam
- IP65 Rated: Suitable for Wet Locations
- ETL Listed (4009701 / YR-TP500-XX0W)
- Lumen Maintenance over 70% @ 50,000 Hours
- Stylish & Durable Housing with Anti-Corrosion Coating, High-Transmission PC Lens
- Easy to Install, Lightweight – Ideal for Load-Bearing Poles
- Internal Mean Well Driver
- No UV/IR, No Mercury or Lead, ROHS Compliant
- Solid State – High Shock/Vibration Resistant

APPLICATIONS

- Parking lots
- Walkways & Pathways
- Public Parks, Theme Parks
- Outdoor Malls
- Playgrounds
- Campuses & Schools

AVAILABLE OPTIONS

- Other Beam Angles: Type V & IV
- Other CCT Colors
- Other Housing Color Finishes
- Pole Adapters for Different Types

Over 35 Years of LEDtronics Design, Engineering & Manufacturing Experience



Pole Mount



PTF001-150W-XPW-101 (150 Watts, replaces MH/HPS up to 400W)

PTF001-200W-XPW-101 (200 Watts, replaces MH/HPS up to 600W)

PTF001-300W-XPW-101 (300 Watts, replaces MH/HPS up to 1000W)

	150W	200W	300W
Input Power	150W±5 Watts	200±5 Watts	313 Watts
Input Voltage	100~277VAC (Tested @ 120VAC)		
Input Current	1.25A	1.67A	2.50A
Total Lumens	20091 lm	20,752 lm	29319 lm
Efficacy	101 lm/W	104 lm/W	94 lm/W
Max. Candela	13551 cd	-	35806 cd
Power Factor	0.95	>0.9	>0.9
LED Emitted Color	Pure White		
Color Temperature	5000K		
CRI	74	≥70	≥70
Illumination Angle	120°		
Dimmability	Dimmable 0-10V		
Protection Rating	IP65		
Housing	Aluminum Alloy / Bronze		
Lens	Polycarbonate		
Oper. Temperature	-40°F ~ +122°F / -40°C ~ +50°C		
Dimensions	H21.9 x L21.9 x W15.8 inch H558 x L558 x W401 mm		
Weight	28.7 lbs / 13.0 kg		

LEDTRONICS®

America's Premium Brand LED Company™



© 2018 LEDtronics, Inc.



23105 Kashiwa Court, Torrance, CA 90505
Phone: (800) 579.4875 / (310) 534.1505

Fax: (310) 534.1424

E-mail: info@ledtronics.com





Website: ledtronics.com

To order LEDtronics products,
contact the Distributor or Sales Representative in your area.

Visit our website to find your local Distributor or Representative from our worldwide network:

LEDtronics.com

PHOTOMETRIC REPORTS

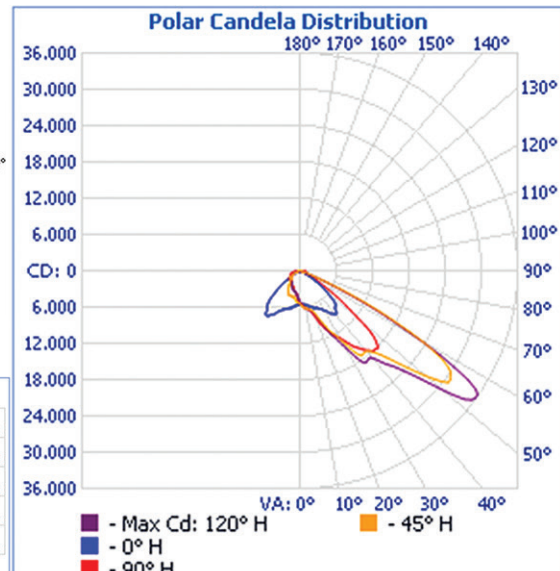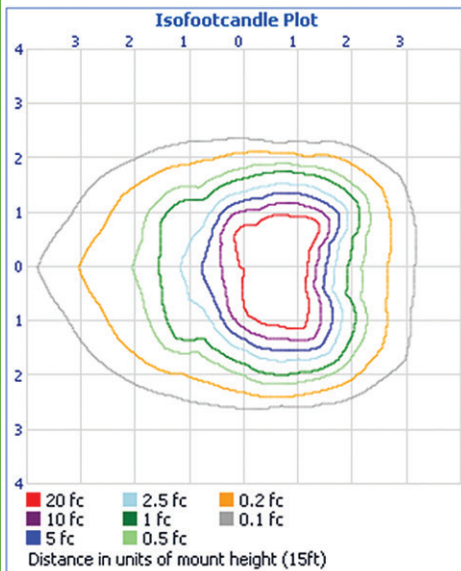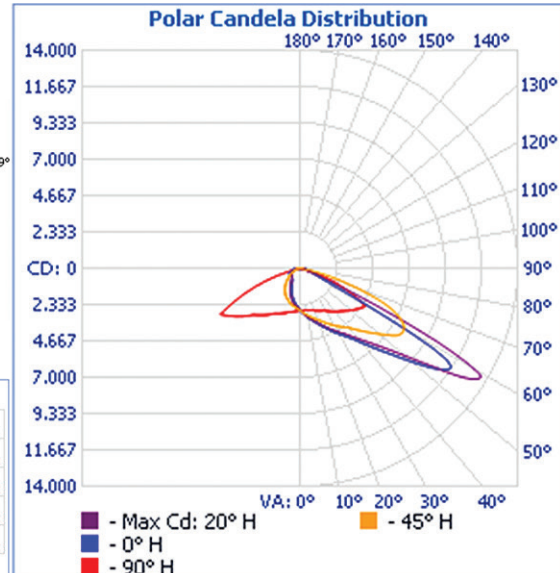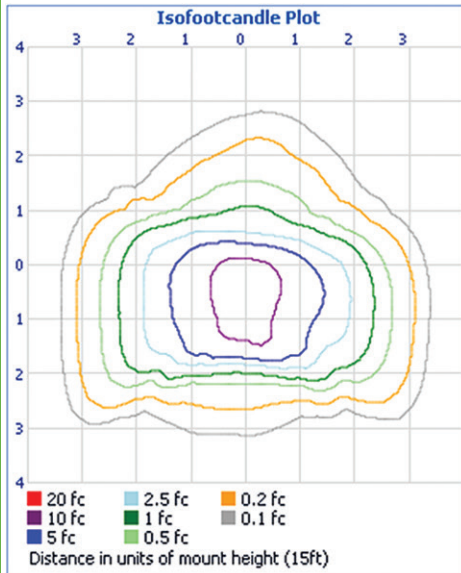

MOUNTING POLE ADAPTERS AVAILABLE For Different-Diameter Round or Square Poles



For Round Poles
 4-in. [102mm] max. diameter
 Part # PTF000-ADPT-4.0R-001



For Round Poles
 4.5-in. [115mm] max. diameter
 Part # PTF000-ADPT-4.5R-001



For Round Poles
 5-in. [128mm] max. diameter
 Part No.: PTF000-ADPT-5.0R-001



For Round Poles
 6-in. [153mm] max. diameter
 Part # PTF000-ADPT-6.0R-001

For Square Poles
 4x4-in. [102mm] max. width:
 Part No.: PTF000-ADPT-4.0S-001