



LED GU24 Dimmable Light Bulb, 8.5W

120VAC – 3000K White – 2-inch Frosted Lens – GU24 Base – USA Made



FEATURES

- 3 Year LEDtronics Warranty
- Energy Savings of up to 85% over Halogens
- Lumen Maintenance over 70% @ 25,000+ Hours
- Direct Retrofit into GU24 Base Fixtures
- Dims with In-line Dimmer Switches
- High CRI, High Lumen LM80 LEDs
- RoHS Compliant – No Toxic Mercury or Lead
- Even Lighting, No Buzzing, No Flickering
- No UV/IR Radiation, No RF Interference
- ARRA Compliant: Made in USA from Imported Parts

APPLICATIONS

- Specialty Architectural Lighting
- Sconce Lighting



Over 35 Years of LEDtronics Design, Engineering & Manufacturing Experience




GU24 BASE

155° Flood Light Beam

8.5 Watts, Replaces Halogen Lamps up to 30W

LEDGU24-9WF-XIW-001AD

Input Power	8.5 Watts
Input Voltage	120VAC
Input Current	0.080A
Power Factor	0.93
Max. Candela	110 cd
Total Lumens	555 lm
Efficacy	65 lm/W
Color Temperature	3010K
Emitted Color	Warm White
CRI	80
Illumination Angle	160° x 150°
Dimmability	Dimmable
Oper. Temperature	-13°F ~ +194°F / -25°C ~ +90°C
Body	Polycarbonate / White
Lens	Lexan-201-112 / Frosted
Base	GU24
Dimensions	2.65 x Ø1.93 inch / 67 x Ø49 mm
Net Weight	0.125 lb / 56.7 g

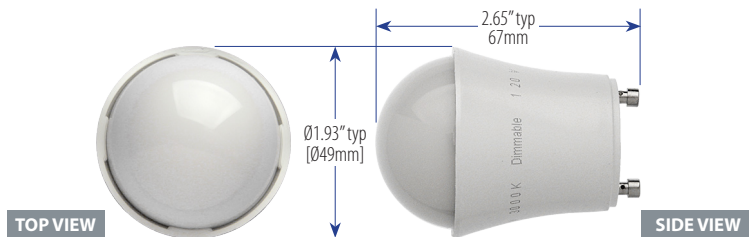

LEDTRONICS®

America's Premium Brand LED Company™



© 2017 LEDtronics, Inc.



23105 Kashiwa Court, Torrance, CA 90505
 Phone: (800) 579.4875 / (310) 534.1505
 Fax: (310) 534.1424
 E-mail: info@ledtronics.com
 Website: ledtronics.com

To order LEDtronics products, contact the Distributor or Sales Representative in your area.

Visit our website to find your local Distributor or Representative from our worldwide network:

LEDtronics.com

WWW.LEDTRONICS.COM

L06 726 / Rev 07-2017

Check LEDTRONICS.COM for latest data. Printed material may be outdated.

LEDGU24-9WF-XIW-001AD

Luminaire Photometric Report

Filename: LEDGU24-9WF-XIW-001AD

Manufacturer: LEDTRONICS

Luminaire: FROSTED LENS, 8.7W, 120VAC

Lamp Output: 1 lamp, rated Lumens/lamp: 553.4

Max Candela: 108.0 at Horizontal: 67.5°, Vertical: 0°

Luminous Opening: Point

Test: 7-17-17

Photometry : Type C

CIE Class: Semi-Direct

Cutoff Class: Noncutoff

Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	10.2	1.8%	90-100	40.0	7.2%
10-20	29.3	5.3%	100-110	28.8	5.2%
20-30	45.4	8.2%	110-120	18.3	3.3%
30-40	57.4	10.4%	120-130	10.3	1.9%
40-50	64.9	11.7%	130-140	4.4	0.8%
50-60	67.5	12.2%	140-150	0.9	0.2%
60-70	65.6	11.9%	150-160	0	0%
70-80	59.7	10.8%	160-170	0	0%
80-90	50.7	9.2%	170-180	0	0%

