



LED 2x4ft Thin Panel Light

40 Watts – 100 to 277VAC – 120° Wide Beam – 5000K Pure White - UL



FEATURES

- 5 Year LEDtronics Warranty
- Lumen Maintenance over 70% @ 50,000+ Hours
- Energy Savings up to 75% over Fluorescents
- Solid State – Shock & Vibration Proof
- LM80 SMD Chips: High Lumen, High CRI, No Heat
- White Trim Aluminum Frame, PMMA LED Diffuser Plate, Frosted PS Diffuser Offers High Uniformity & Transmission, No Glare
- UL/cUL Listed (BDPE24XUA-40WB-XXXXX)
- Title 24 Compliant
- UL Recognized, Double Insulated, External LED Driver
- No UV or IR, No Glass, No Mercury – RoHS Compliant

APPLICATIONS

- Recessed Luminaires for Ambient Lighting of Interior Commercial Spaces
- Ultraslim Profile Fits Seamlessly into Standard Dropped Ceiling Troffer & Parabolic Fixtures
- Industrial Area Lighting
- Office Lighting
- Hospital & Hospitality Lighting
- Conference Room Lighting
- Retail & Convenience Store Lighting
- Commercial Area Lighting
- School/College/University Lighting


*Over 35 Years of LEDtronics Design,
Engineering & Manufacturing Experience*

AVAILABLE OPTIONS

- Other White Color Temperatures
- Other Wattages
- Other Sizes
- Emergency Battery Backup

*Uses 40 Watts, Replaces
3x 32W T8 Fluorescent Fixture*

2x4 ft

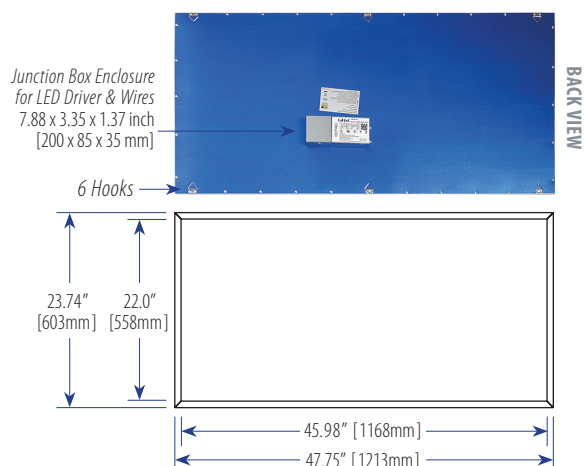

CLL2X4DB-40W-XPW-101

Input Power	40 Watts
Input Voltage	100~277VAC (Tested @ 120VAC)
Color Temperature	5000K
Emitted Color	Pure White
Total Lumens	4600 lm
Efficacy	115 lm/W
CRI	84
Power Factor	0.941
Angle of Illumination	120°
Dimmability	Not Dimmable
Diffuser Plate	Polystyrene / Frosted White
Light Guide Plate	4mm, PMMA
Housing	Aluminum / White Color
Operating Temperature	-4°F ~ +113°F / -20°C ~ +45°C
Protection Rating	IP20 (Indoor Use Only)
Dimensions	47.75 x 23.74 x 0.41 inch 1213 x 603 x 10.6 mm
Weight (w/Power Supply)	15.06 lbs / 6.83 kg

LEDTRONICS
America's Premium Brand LED Company™



© 2016 LEDtronics, Inc.



23105 Kashiwa Court, Torrance, CA 90505
Phone: (800) 579.4875 / (310) 534.1505
Fax: (310) 534.1424
E-mail: info@ledtronics.com
Website: ledtronics.com

To order LEDtronics products,
contact the Distributor or Sales Representative in your area.

Visit our website to find your local Distributor or Representative from our worldwide network:

LEDtronics.com

WWW.LEDTRONICS.COM

LOG 743 / Rev 10-2017

Check LEDTRONICS.COM for latest data.
Printed material may be outdated.

LED Thin-Panel Ceiling Light, 2x4ft, 40 Watts

2

WWW.LEDTRONICS.COM

OPTIONAL ACCESSORIES (Sold Separately)


Surface Mounting Aluminum Fixture for Ceilings or Walls



Silver or White Frame:

23.4 x 23.4 x 2.4 inch [608 x 608 x 62 mm]
12.0 x 47.9 x 2.4 inch [305 x 1218 x 62 mm]
23.4 x 47.9 x 2.4 inch [608 x 1218 x 62 mm]

Earthquake-proof Steel Hook for Ceiling Installation




1.18 x 0.35 x 1.37 inch
[30 x 9 x 35 mm]
T=1 mm


Steel Wire Cables for Ceiling Suspension

CLL-MTG-CABLE-002DB


Main Wire: 46.12 in [1.2 m]
Vice Wire: 21.75 in [0.6 m]
Wire Thickness: 0.04 in [1mm]
Number of Wires: 3



APPLICATIONS

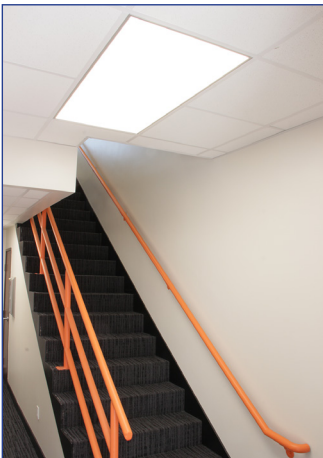

LEDtronics Thin Panel
Dimmable Lights
Illuminate Medical
Offices, Salons,
Reception Areas,
Hallways and Stairwells

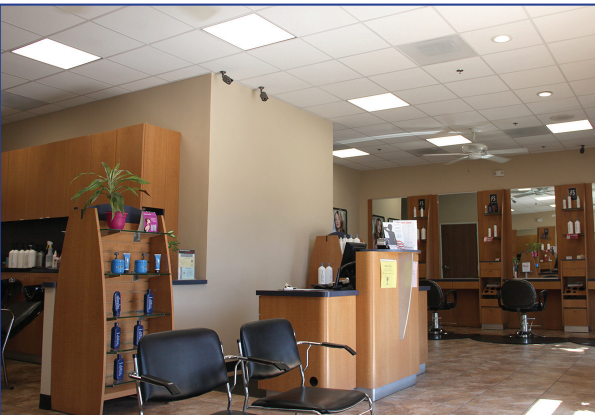

LEDTRONICS®
America's Premium Brand LED Company™

© 2017 LEDtronics, Inc.

scmbdc
Southern California
Minority Business Development Council



23105 Kashiwa Court, Torrance, CA 90505

Phone: (800) 579.4875 / (310) 534.1505

Fax: (310) 534.1424

E-mail: info@ledtronics.com

Website: ledtronics.com

106 609