



LED Forward Throw Wall Packs, Dimmable

40 to 150 Watts – 100 to 277VAC – 5000K White – IP65 Weatherproof – ETL



FEATURES

- 3 Year LEDtronics Warranty
- ETL/cETL Listed (4009701)
- Durable Die-cast Aluminum Housing
- Dimmable 0 to 10V – Title 24 Compliant
- Energy Savings of up to 75%
- Lumen Maintenance over 70% @ 50,000+ Hours
- Indoor/Outdoor Use: Suitable for Wet Locations
- High Lumen & Efficacy / 90°x135° Wide Beam
- Solid-State: High-Shock & Vibration Resistant
- No UV/IR Radiation, Eco-Friendly – RoHS Compliant

APPLICATIONS

- Perimeter Security Lighting
- Building Entrance Lighting
- Warehouses, Loading Platforms
- Landscape Lighting
- Walkways, Underpasses & Pathways
- Recreation Areas
- Architectural Wall Washing
- Signs & Billboards
- Parking Lot Lighting
- Emergency Exit Way Lighting



Intertek
4009701




AVAILABLE OPTIONS

- 4000K, 4500K & 5700 White CCT Colors
- “Made in USA” ARRA Compliance

Over 35 Years of LEDtronics Design,
Engineering & Manufacturing Experience



40 to 150 Watts, Replaces
HID Lamps 150W up to 450 Watts

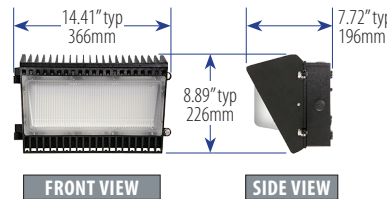

- WLPE14-040W-XPW-105D (40 Watts)
- WLPE14-060W-XPW-105D (60 Watts)
- WLPE14-080W-XPW-105D (80 Watts)
- WLPE14-100W-XPW-105D (100 Watts)
- WLPE14-120W-XPW-105D (120 Watts)
- WLPE14-150W-XPW-105D (150 Watts)

| | 040W | 060W | 080W | 100W | 120W | 150W |
|---------------------|--|--------------|--------------|-------------------|---------------|---------------|
| Input Power | 45±3 Watts | 66±3 Watts | 88±4 Watts | 105±4 Watts | 130±4 Watts | 162±5 Watts |
| Input Voltage | 100~277VAC (Tested @120VAC) | | | | | |
| Input Current | 0.35-0.4A | 0.525-0.575A | 0.7-0.77A | 0.84-0.9A | 1.05-1.12A | 1.31-1.39A |
| Total Lumens | 5352 lm | 7922 lm | 10740 lm | 13692 lm | 16721 lm | 21160 lm |
| Efficacy | 127.91 lm/W | 126.59 lm/W | 133.48 lm/W | 132.67 lm/W | 133.98 lm/W | 135.91 lm/W |
| Max. Candela | 1023.2 cd | 1614.1 cd | 4293.3 cd | 2913.4 cd | 4157.3 cd | 4278.7 cd |
| Power Factor | 0.90 | 0.90 | 0.90 | 0.92 | 0.90 | 0.90 |
| CRI | 74.4 | 74.4 | 74.6 | 74.7 | 74.6 | 74.5 |
| Emitted Color / CCT | Pure White / 5000K | | | | | |
| Beam Angle | 90° x 135° | | | | | |
| Dimmability | 0-10V | | | | | |
| Housing | Aluminum Alloy / Black | | | | | |
| Lens | Polycarbonate / Frosted White | | | | | |
| Protection Rating | IP65 | | | | | |
| Operating Temp. | -31°F ~+113°F / -35°C ~+45°C | | | | | |
| Dimensions (typ.) | L 14.41" x W 7.72" x H 8.89" inch / L 366 x W196 x H226 mm | | | | | |
| Net Weight | 12.1 lbs / 5.5 Kg | | | 17.6 lbs / 8.0 Kg | | |
| ETL/cETL Listing | YR-WL266-W40 | YR-WL266-W60 | YR-WL266-W80 | YR-WL266-W100 | YR-WL266-W120 | YR-WL266-W150 |

WWW.LEDTRONICS.COM

LOG 764 / Rev 10-2018

LEDTRONICS®

America's Premium Brand LED Company™



© 2018 LEDtronics, Inc.



23105 Kashiwa Court, Torrance, CA 90505

Phone: (800) 579.4875 / (310) 534.1505

Fax: (310) 534.1424

E-mail: info@ledtronics.com

Website: ledtronics.com


To order LEDtronics products,
contact the Distributor or Sales Representative in your area.

Visit our website to find your local Distributor or Representative from our worldwide network:



LEDTRONICS.COM

Check LEDTRONICS.COM for latest data.
Printed material may be outdated.


Filename: WLPE14-040W-XPW-10SD
Manufacturer: LEDTRONICS, INC.
Lamp Output: 1 lamp, rated Lumens/lamp: 3670.9
Max Candela: 1,023.2 at Horizontal: 180°, Vertical: 36°
Input Wattage: 40.4
Luminous Opening: Circular (Dia: 19.69")
Test Date: 2015-06-10
Test Lab: EVERFINE
Photometry : Type C
CIE Class: Semi-Direct
Cutoff Class: Noncutoff
Nema Type: 7 X 7

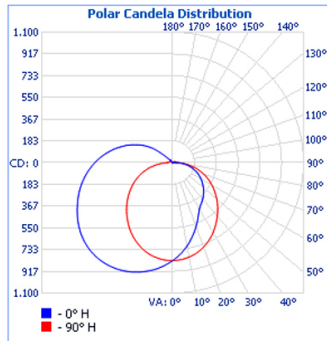



| Zone | Lumens | % Total | Zone | Lumens | % Total |
|-------|--------|---------|---------|--------|---------|
| 0-10 | 78.1 | 2.1% | 90-100 | 214.1 | 5.8% |
| 10-20 | 224.0 | 6.1% | 100-110 | 157.1 | 4.3% |
| 20-30 | 342.0 | 9.3% | 110-120 | 97.9 | 2.7% |
| 30-40 | 424.1 | 11.6% | 120-130 | 44.9 | 1.2% |
| 40-50 | 469.4 | 12.8% | 130-140 | 8.6 | 0.2% |
| 50-60 | 474.7 | 12.9% | 140-150 | 2.9 | 0.1% |
| 60-70 | 446.2 | 12.2% | 150-160 | 1.9 | 0.1% |
| 70-80 | 384.8 | 10.5% | 160-170 | 1.3 | 0% |
| 80-90 | 298.6 | 8.1% | 170-180 | 0.4 | 0% |

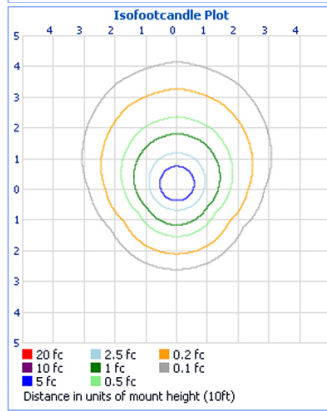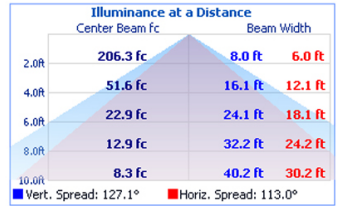


Filename: WLPE14-100W-XPW-10SD
Manufacturer: LEDTRONICS, INC.
Lamp Output: 1 lamp, rated Lumens/lamp: 10912
Max Candela: 2,913.4 at Horizontal: 270°, Vertical: 24°
Input Wattage: 101.6
Luminous Opening: Circular (Dia: 19.69")
Test Date: 2017-05-09
Test Lab: EVERFINE
Photometry : Type C
CIE Class: Semi-Direct
Cutoff Class: Noncutoff
Nema Type: 5 X 7

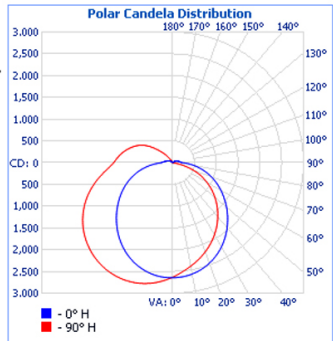



| Zone | Lumens | % Total | Zone | Lumens | % Total |
|-------|---------|---------|---------|--------|---------|
| 0-10 | 249.6 | 2.3% | 90-100 | 494.6 | 4.5% |
| 10-20 | 722.7 | 6.6% | 100-110 | 400.2 | 3.7% |
| 20-30 | 1,116.2 | 10.2% | 110-120 | 285.0 | 2.6% |
| 30-40 | 1,385.5 | 12.7% | 120-130 | 155.2 | 1.4% |
| 40-50 | 1,506.5 | 13.8% | 130-140 | 61.3 | 0.6% |
| 50-60 | 1,478.1 | 13.5% | 140-150 | 18.6 | 0.2% |
| 60-70 | 1,315.1 | 12.1% | 150-160 | 6.5 | 0.1% |
| 70-80 | 1,028.4 | 9.4% | 160-170 | 4.2 | 0% |
| 80-90 | 682.7 | 6.3% | 170-180 | 1.5 | 0% |

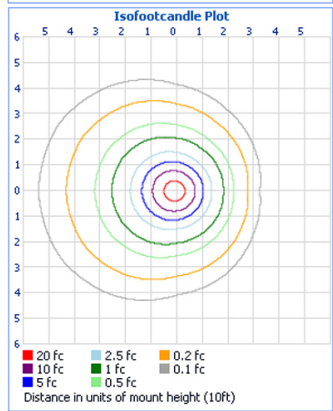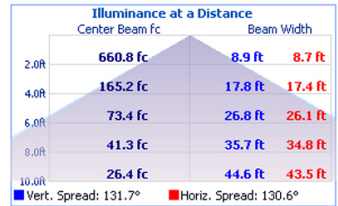

Filename: WLPE14-150W-XPW-10SD
Manufacturer: LEDTRONICS, INC.
Lamp Output: 1 lamp, rated Lumens/lamp: 16224.4
Max Candela: 4,278.7 at Horizontal: 270°, Vertical: 32°
Input Wattage: 151.3
Luminous Opening: Circular (Dia: 19.69")
Test Date: 2017-04-13
Test Lab: EVERFINE
Photometry : Type C
CIE Class: Semi-Direct
Cutoff Class: Noncutoff
Nema Type: 6 X 7

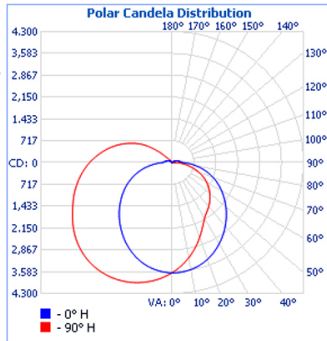

| Zone | Lumens | % Total | Zone | Lumens | % Total |
|-------|---------|---------|---------|--------|---------|
| 0-10 | 342.1 | 2.1% | 90-100 | 946.3 | 5.8% |
| 10-20 | 982.8 | 6.1% | 100-110 | 701.5 | 4.3% |
| 20-30 | 1,505.1 | 9.3% | 110-120 | 437.9 | 2.7% |
| 30-40 | 1,871.9 | 11.5% | 120-130 | 196.2 | 1.2% |
| 40-50 | 2,077.9 | 12.8% | 130-140 | 40.5 | 0.2% |
| 50-60 | 2,107.4 | 13.0% | 140-150 | 12.3 | 0.1% |
| 60-70 | 1,981.5 | 12.2% | 150-160 | 7.7 | 0% |
| 70-80 | 1,697.9 | 10.5% | 160-170 | 5.0 | 0% |
| 80-90 | 1,308.6 | 8.1% | 170-180 | 1.8 | 0% |

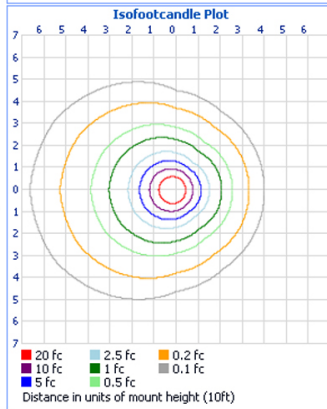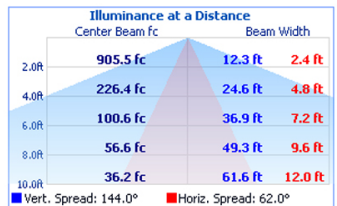

APPLICATIONS

*LEDtronics LED Wall-Pack
Luminaires Illuminate Outdoor
Areas at Locations around the World*