



LED Mini Wall Pack, 25 Watts, w/Sensor

100 to 277VAC – 90° Beam – 4000K & 5000K White – Clear Lens – IP65: Moistureproof – ETL



FEATURES

- 5 Year LEDtronics Warranty
- Durable Die-cast Aluminum Heatsink, PC Housing
- Energy Savings of over 65%
- Lumen Maintenance over 70% @ 54,000+ Hours
- IP65: Moistureproof – Suitable for Outdoor Locations
- ETL/cETL Listed (EW-WP-W025)
- Wide Operating Temperature Range: -40°F ~ +122°F
- High Lumen & Efficacy
- Solid-State: High-Shock & Vibration Resistant
- IK08 Rated Shatterproof
- Eco-Friendly, RoHS Compliant
- LM79 SMD LEDs (Reports Available)

APPLICATIONS

- Perimeter Security Lighting
- Building Entrance Lighting
- Warehouses, Loading Platforms
- Walkways, Underpasses & Pathways
- Recreation Areas
- Parking Lot Lighting

AVAILABLE OPTIONS

- Other CCTs: 5000K
- Motion Detectors
- Dimmable/No Photo Sensor


Over 35 Years of LEDtronics Design, Engineering & Manufacturing Experience

PHOTO SENSOR



Vertical Configuration

Uses 25 Watts,
Replaces MH/HPS
Lamps up to 70W

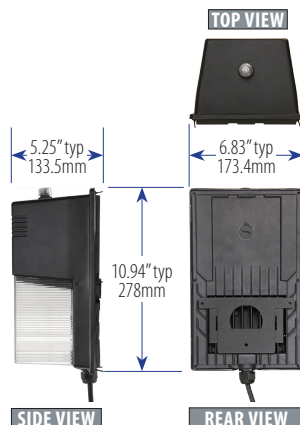

WLPV-025W-XNW-101P (Natural White)

WLPV-025W-XPW-101P (Pure White)

	XNW	XPW
Input Power	24.1 Watts	24.01 Watts
Input Voltage	100~277VAC	(Tested @ 120VAC)
Input Current	0.271A	0.214A
Power Factor		0.93
Total Lumens	2427.3 lm	2492.2 lm
Efficacy	100.7 lm/W	103.8 lm/W
Max. Candela	1348 cd	1342 cd
CRI	74.4	74.2
Illumination Angle		90°
Emitted Color	Natural White	Pure White
Color Temperature	4000K	5000K
Dimmability		Not Dimmable
Oper. Temperature	-40°F ~ +122°F	-40°C ~ +50°C
Heatsink	Die-Cast Aluminum / Black	
Housing	Polycarbonate / Black	
Lens Material	Polycarbonate / Clear	
Protection Rating	IP65	
Shatterproof Rating	IK08	
Dimensions (LxWxH)	10.94 x 6.83 x 5.25 inch 278 x 173.4 x 133.5 mm	
Weight	3.33 lbs / 1.51 kg	



LEDTRONICS®

America's Premium Brand LED Company™



© 2019 LEDtronics, Inc.

23105 Kashiwa Court, Torrance, CA 90505

Phone: (800) 579.4875 / (310) 534.1505

Fax: (310) 534.1424

E-mail: info@ledtronics.com

Website: ledtronics.com



To order LEDtronics products,
contact the Distributor or Sales Representative in your area.

Visit our website to find your local Distributor or Representative from our worldwide network:

LEDTRONICS.COM

LOG 774 / Rev 07-2019

Check LEDTRONICS.COM for latest data.
Printed material may be outdated.

WWW.LEDTRONICS.COM

Filename: WLPV-025W-XNW-101P

Manufacturer: LEDTRONICS

Luminaire: CLEAR LENS, 26.3W, 120VAC

Lamp Output: 1 lamp, rated Lumens/lamp: 1681.2

Max Candela: 1,000.0 at Horizontal: 0°, Vertical: 10°

Luminous Opening: Point

Test: 9-11-17

Photometry : Type C

CIE Class: Direct

Cutoff Class: Semicutoff

Nema Type: 6 X 7

Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	83.6	5.0%	90-100	11.7	0.7%
10-20	203.4	12.1%	100-110	8.6	0.5%
20-30	238.6	14.2%	110-120	10.5	0.6%
30-40	255.0	15.2%	120-130	10.1	0.6%
40-50	257.8	15.3%	130-140	7.9	0.5%
50-60	228.0	13.6%	140-150	4.6	0.3%
60-70	185.5	11.0%	150-160	1.1	0.1%
70-80	124.4	7.4%	160-170	0	0%
80-90	50.4	3.0%	170-180	0	0%

