



LED T8 Composite Tube Light, 18 Watts

4 ft – Frosted Lens – 4000K White – 100~277VAC – 2 Pin / G13 Base – Adjustable End Caps



FEATURES

- 5 Year LEDtronics Warranty
- Direct Retrofit into 4-Ft Fluorescent T8 Fixtures
- Energy Savings of up to 50%
- Lumen Maintenance over 70% @ up to 40,000 Hours
- 100x150 Degree Wide Beam, High-Lumen Illumination
- Even Lighting, No Buzzing, No Flickering, Instant Start
- No UV/IR Radiation, No RF Interference
- No Toxic Mercury - RoHS Compliant
- UL/cUL Classified: E358356
- UL/cUL Recognized: E322319
- LM79 & LED LM80 Reports on File
- Operates Directly with AC Current, Requires Bypassing of any Existing Fluorescent Ballast

APPLICATIONS

- Office Lighting
- Production Area
- Warehouse Lighting
- Coolers, Freezers & Damp Locations
- Retail Store Display Lighting
- Transportation
- Undercabinet Lighting
- General & Street Sign Backlighting

AVAILABLE OPTIONS


- Other Tube Lengths
- Other CCT Colors
- Other Voltages

Over 35 Years of LEDtronics Design, Engineering & Manufacturing Experience

Adjustable End Caps for Optimum Beam Direction


Uses 18 Watts, Replaces Fluorescents up to 36W

Frosted Lens



LED48T8CM-18W-XWW-101WFA

| | |
|--------------------|--------------------------------------|
| Input Power | 18 Watts |
| Input Voltage | 100~277VAC (Tested @120VAC) |
| Input Current | 0.155A |
| Total Lumens | 2060 lm |
| Efficacy | 110 lm/W |
| Max. Candela | 500 cd |
| Power Factor | 1.0 |
| Color Temperature | 3800K~4300K |
| Emitted Color | Natural White |
| CRI | >80 |
| Illumination Angle | 105° x 150° |
| Dimmability | Not Dimmable |
| Oper. Temperature | -4°F to 113°F (-20°C to 45°C) |
| Heatsink | Aluminum Alloy / Silver Color |
| Lens | Polycarbonate / Frosted White |
| Base | 2-Pin G13 |
| Dimensions (max) | 47.78 x Ø1.10 inch / 1213.6 x Ø28 mm |
| Net Weight | 0.62 lb / 9.92 oz / 281.23 g |

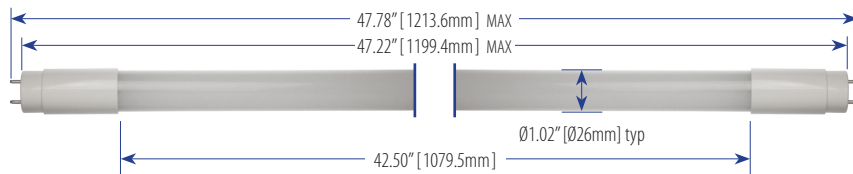

LEDTRONICS

America's Premium Brand LED Company™

23105 Kashiwa Court, Torrance, CA 90505
 Phone: (800) 579.4875 / (310) 534.1505
 Fax: (310) 534.1424
 E-mail: info@ledtronics.com
 Website: ledtronics.com



© 2020 LEDtronics, Inc.

To order LEDtronics products, contact the Distributor or Sales Representative in your area.

Visit our website to find your local Distributor or Representative from our worldwide network:

LEDtronics.com