



Compact LED T5 Tube Light Bulb

1.6 Watts – 10~30VDC – Ba15D Base – 360° Illumination – 6000K Cool White – Clear Lens



FEATURES

- 2 Year LEDtronics U.S. Warranty
- Up to 90% Energy Reduction over Halogens & Incandescents
- Long Lifespan: White LEDs Last up to 50,000 Hours
- Solid State – Shock & Vibration Resistant
- Compact Bulb Fits in Enclosed Fixtures & Tight Spaces
- High Lumen, High Efficacy, Instant-on, No Flickering
- 360° Omnidirectional, No-Shadow Beam
- Clear Polycarbonate Lens
- Nickel-Plated Brass Ba15D Base
- Bipolar for Quick Installation
- Wide Operating Temperature Range: -30°C to +50°C
- Minimal Heat Generation, No UV or IR
- No Toxic Metals – RoHS Compliant


APPLICATIONS

- Automotive Bulbs
- Machine Status Indicator Bulbs
- Accent Lighting
- Decorative Lighting
- Appliance Bulbs
- Chandeliers


AVAILABLE OPTIONS

- Other Bases Available for Preorder:
 - ▶ E12 Candelabra 12mm Screw Base
 - ▶ E14 European 14mm Screw Base
 - ▶ E17 Intermediate 17mm Screw Base
 - ▶ Ba15S Intermediate 15mm Single-Contact Bayonet Base
- Other Colors & White Color Temperatures
- Other Voltages

Over 35 Years of LEDtronics Design, Engineering & Manufacturing Experience

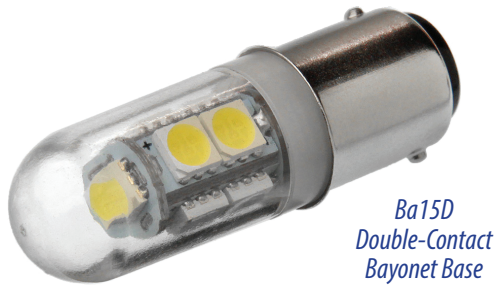

Ba15D
Double-Contact
Bayonet Base

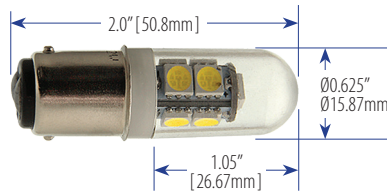

LED16T5-1WDCB-XCW-1030V

Input Voltage	10VDC	30VDC
Input Power	1.2 Watts	1.6 Watts
Input Current	0.120A	0.055A
Efficacy	125 lm/W	115 lm/W
Lumens	150 lm	190 lm
CRI	77	
Illumination Angle	360°	
Emitted Color	Cool White	
Color Temperature	6000K	
Base/Material	Ba15D / Bipolar / Nickel-Plated Brass	
Lens	Polycarbonate / Clear	
Dimmability	Not Dimmable	
Oper. Temperature	-22°F ~+122°F / -30°C ~+50°C	
Dimensions	2.0 x Ø0.625 inch / 50.8 x Ø15.87 mm	
Net Weight	0.2 oz / 5.67g	



LEDTRONICS®

America's Premium Brand LED Company™



© 2019 LEDtronics, Inc.



23105 Kashiwa Court, Torrance, CA 90505
Phone: (800) 579.4875 / (310) 534.1505

Fax: (310) 534.1424

E-mail: info@ledtronics.com

Website: ledtronics.com

To order LEDtronics products, contact your area Distributor or Sales Representative.

Visit our website to find your local Distributor or Representative from our worldwide network:

LEDTRONICS.COM

WWW.LEDTRONICS.COM

LOG 800 / Rev 10-2019

Check LEDTRONICS.COM for latest data.
Printed material may be outdated.