



# Compact LED T5 Tube Bulbs, High Lumen

1.6 Watts – 10~30VDC – E12, E14, E17 Base – 360° Illumination – 6000K Cool White – Clear Lens



## FEATURES

- 2 Year LEDtronics U.S. Warranty
- Up to 90% Energy Reduction over Halogens & Incandescents
- Long Lifespan: White LEDs Last up to 50,000 Hours
- Solid State – Shock & Vibration Resistant
- Compact Bulb Fits in Enclosed Fixtures & Tight Spaces
- High Lumen, High Efficacy, Instant-on, No Flickering
- 360° Omnidirectional, No-Shadow Beam
- Clear Polycarbonate Lens
- Nickel-Plated Brass Base
- Wide Operating Temperature Range: -30°C to +50°C
- Minimal Heat Generation, No UV or IR
- No Toxic Metals – RoHS Compliant


## APPLICATIONS

- Automotive Bulbs
- Machine Status Indicator Bulbs
- Accent Lighting
- Decorative Lighting
- Appliance Bulbs
- Low-voltage Holiday Lighting
- Chandeliers

## AVAILABLE OPTIONS

- Other Colors
- Other White Color Temperatures
- Other Voltages

Over 35 Years of LEDtronics Design, Engineering & Manufacturing Experience

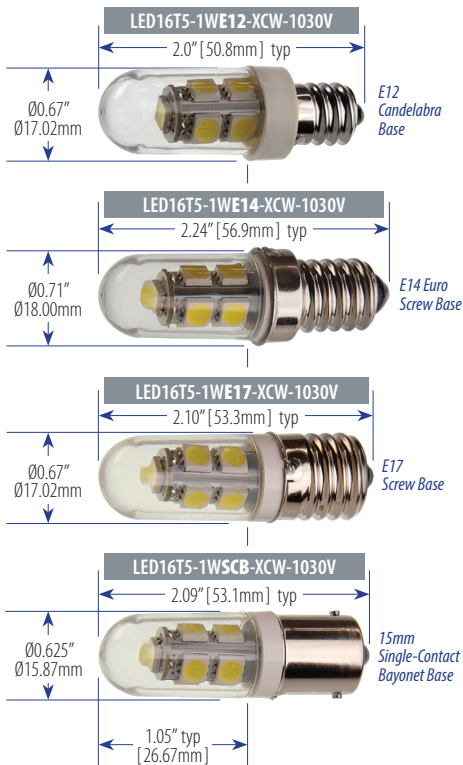

LED16T5-1WE12-XCW-1030V (E12 Candelabra 12mm Screw Base)  
 LED16T5-1WE14-XCW-1030V (E14 European 14mm Screw Base)  
 LED16T5-1WE17-XCW-1030V (E17 Intermediate 17mm Screw Base)  
 LED16T5-1WSCB-XCW-1030V (Ba15S Intermediate 15mm Single-Contact Bayonet Base)

|                    |                                |           |
|--------------------|--------------------------------|-----------|
| Input Voltage      | 10VDC                          | 30VDC     |
| Input Power        | 1.2 Watts                      | 1.6 Watts |
| Input Current      | 0.120A                         | 0.055A    |
| Efficacy           | 125 lm/W                       | 115 lm/W  |
| Lumens             | 88 lm                          | 150 lm    |
| CRI                | 77                             |           |
| Illumination Angle | 360°                           |           |
| Emitted Color      | Cool White                     |           |
| Color Temperature  | 6000K                          |           |
| Base Material      | Nickel-Plated Brass            |           |
| Lens               | Polycarbonate / Clear          |           |
| Dimmability        | Not Dimmable                   |           |
| Oper. Temperature  | -22°F ~ +122°F / -30°C ~ +50°C |           |
| Net Weight         | 0.2 oz / 5.67g                 |           |

WWW.LEDTRONICS.COM

LOG 803 / Rev 10-2019

# LEDTRONICS

America's Premium Brand LED Company™



© 2019 LEDtronics, Inc.



23105 Kashiwa Court, Torrance, CA 90505  
 Phone: (800) 579.4875 / (310) 534.1505  
 Fax: (310) 534.1424  
 E-mail: info@ledtronics.com  
 Website: ledtronics.com

To order LEDtronics products, contact your area Distributor or Sales Representative.

Visit our website to find your local Distributor or Representative from our worldwide network:

LEDTRONICS.COM

Check LEDTRONICS.COM for latest data. Printed material may be outdated.