



Compact LED T6 Tube Bulbs, Low Voltage

1.4~3.6 Watts – 10~30VDC – 15mm Ba15s Single-Contact Base – 320° Illumination



FEATURES

- 3 Year LEDtronics U.S. Warranty
- Up to 90% Energy Reduction over Halogens & Incandescents
- Lumen Maintenance over 70% @ 15,000 Hours
- 320° Omnidirectional, No-Shadow Beam
- Choice of Super Red, Super Yellow & Cool White
- Nickel-Plated Brass Ba15s Bayonet Base
- Solid State – Shock & Vibration Resistant
- Compact Bulb Fits in Enclosed Fixtures & Tight Spaces under Recommended Operating Temperature Range
- High Lumen, High Efficacy, Instant-on, No Flickering
- Wide Operating Temperature Range: -30°C to +50°C
- Minimal Heat Generation, No UV Radiation


APPLICATIONS

- Automotive & Machine Status Indicators
- Revolving Warning Lights
- Accent Lighting
- Decorative Lighting
- Appliance Bulbs
- Chandeliers

AVAILABLE OPTIONS

- Other Bases Available for Preorder
- Other Colors & White Color Temperatures
- Other Voltages

Over 35 Years of LEDtronics Design, Engineering & Manufacturing Experience

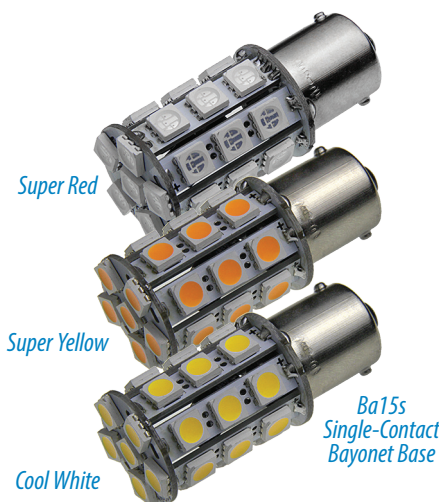

LED20T6-4WSCB-0ER-1030V (Super Red ■)
 LED20T6-4WSCB-0UY-1030V (Super Yellow ■)
 LED20T6-4WSCB-XCW-1030V (Cool White)

Emitted Color

Peak Wave λp / Color Temp.

Input Voltage

Input Power

Input Current

Total Lumens

Luminous Intensity (mcd)

SCP

CRI

Viewing Angle

Dimmability

Operating Temp.


Base Type

Base Material

Dimensions

Weight

	0ER		0UY		XCW	
	Super Red	30VDC	Super Yellow	30VDC	Cool White	30VDC
Peak Wave λp / Color Temp.	633nm		595nm		6000K	
Input Voltage	10VDC	30VDC	10VDC	30VDC	10VDC	30VDC
Input Power	1.8 Watts	2.0 Watts	1.4 Watts	2.6 Watts	1.8 Watts	1.9 Watts
Input Current	0.180A	0.065A	0.130A	0.085A	0.165A	0.063A
Total Lumens	55 lm	60 lm	200 lm	260 lm	219 lm	234 lm
Luminous Intensity (mcd)	3550	3710	12055	17510	22308	21541
SCP	4.37	4.74	15.83	20.85	17	19
CRI	-	-	37	-	85	-
Viewing Angle			320°			
Dimmability	Not Dimmable					
Operating Temp.	~-22°F to ~+122°F / ~-30°C to ~+50°C					
Base Type	Ba15s Single-Contact Bayonet					
Base Material	Nickel-Plated Brass					
Dimensions	L1.93 x W0.78 inch / L49 x W20 mm					
Weight	0.025 lb / 0.4 oz / 11.34 g					

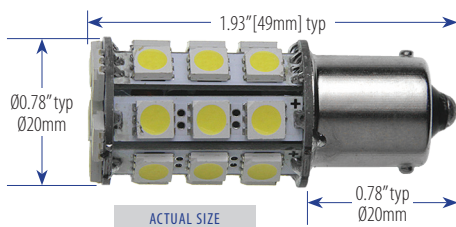

LEDTRONICS

America's Premium Brand LED Company™



© 2020 LEDtronics, Inc.



23105 Kashiwa Court, Torrance, CA 90505
 Phone: (800) 579.4875 / (310) 534.1505
 Fax: (310) 534.1424
 E-mail: info@ledtronics.com
 Website: ledtronics.com

To order LEDtronics products, contact your area Distributor or Sales Representative.

Visit our website to find your local Distributor or Representative from our worldwide network:

LEDTRONICS.COM

WWW.LEDTRONICS.COM

LOG 821 / Rev 12-2020

Check LEDTRONICS.COM for latest data. Printed material may be outdated.