



Compact LED T6 Tube Bulbs, Low Voltage

1.4~3.7 Watts – 10~30VDC – Bipolar – 15mm Single or Dual Contact Base – 320° Beam



FEATURES

- 3 Year LEDtronics U.S. Warranty
- Up to 90% Energy Reduction over Halogens & Incandescents
- Lumen Maintenance over 70% @ 15,000 Hours
- 320° Omnidirectional, No-Shadow Beam
- Choice of Super Red, Super Yellow & Cool White
- Nickel-Plated Brass Ba15s or Ba15d Bayonet Base
- Solid State – Shock & Vibration Resistant
- Compact Bulb Fits in Enclosed Fixtures & Tight Spaces under Recommended Operating Temperature Range
- High Lumen, High Efficacy, Instant-on, No Flickering
- Wide Operating Temperature Range: -30°C to +50°C
- Minimal Heat Generation, No UV Radiation


APPLICATIONS

- Automotive & Machine Status Indicators
- Revolving Warning Lights
- Accent Lighting
- Decorative Lighting
- Appliance Bulbs
- Chandeliers

AVAILABLE OPTIONS

- Other Bases Available for Preorder
- Other Colors & White Color Temperatures
- Other Voltages

Over 40 Years of LEDtronics Design, Engineering & Manufacturing Experience

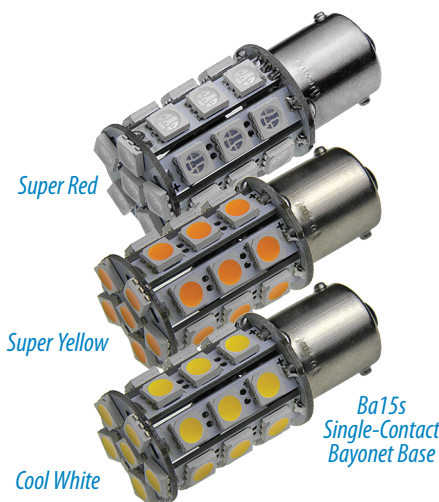


LED20T6-4WSCB-0ER-1030V (Super Red)
 LED20T6-4WSCB-0UY-1030V (Super Yellow)
 LED20T6-4WSCB-XCW-1030V (Cool White)

Single Contact Bayonet

Emitted Color
Peak Wave λ / Color Temp.
Input Voltage
Input Power
Input Current
Efficacy (lm/W)
Total Lumens
Luminous Intensity (mcd)
SCP
CRI
Viewing Angle
Dimmability
Operating Temp.
Base Type
Base Material
Dimensions
Weight

	0ER		0UY		XCW	
	Super Red	30VDC	Super Yellow	30VDC	Cool White	30VDC
Emitted Color	Super Red		Super Yellow		Cool White	
Peak Wave λ / Color Temp.	633nm		595nm		6000K	
Input Voltage	10VDC	30VDC	10VDC	30VDC	10VDC	30VDC
Input Power	1.8 Watts	2.0 Watts	1.4 Watts	2.6 Watts	3.3 Watts	3.7 Watts
Input Current	0.180A	0.065A	0.130A	0.085A	0.335A	0.125A
Efficacy (lm/W)	-	-	-	-	126	120
Total Lumens	55 lm	60 lm	200 lm	260 lm	416 lm	444 lm
Luminous Intensity (mcd)	3550	3710	12055	17510	46 cd	49 cd
SCP	4.37	4.74	15.83	20.85	17	19
CRI	-	-	37	-	85	-
Viewing Angle	320°					
Dimmability	Not Dimmable					
Operating Temp.	~-22°F to ~+122°F / ~-30°C to ~+50°C					
Base Type	Ba15s Single-Contact Bayonet					
Base Material	Nickel-Plated Brass					
Dimensions	L1.93 x W0.78 inch / L49 x W20 mm					
Weight	0.025 lb / 0.4 oz / 11.34 g					

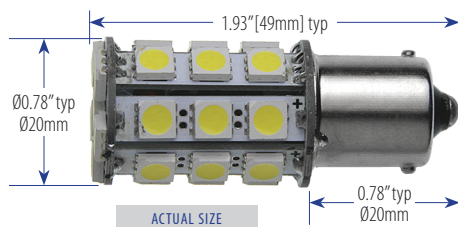

LEDTRONICS
 America's Premium Brand LED Company™



© 2024 LEDtronics, Inc.



23105 Kashiwa Court, Torrance, CA 90505
 Phone: (800) 579.4875 / (310) 534.1505
 Fax: (310) 534.1424
 E-mail: info@ledtronics.com
 Website: ledtronics.com

To order LEDtronics products, contact your area Distributor or Sales Representative.

Visit our website to find your local Distributor or Representative from our worldwide network:



LEDTRONICS.COM

WWW.LEDTRONICS.COM

LOG 821 / Rev 09-2024

Check LEDTRONICS.COM for latest data. Printed material may be outdated.

Compact LED T6 Tube Bulb, 10~30 VDC / Dual Contact Base

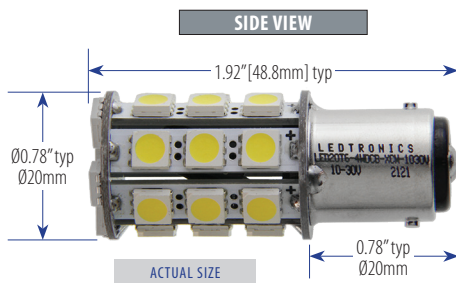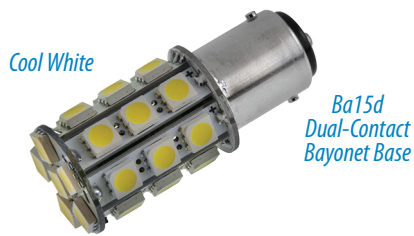

Dual Contact Bayonet

LED20T6-4WDCB-XCW-1030V

Input Voltage	10VDC	30VDC
Input Power	1.8 Watts	1.9 Watts
Input Current	0.165A	0.063A
Lumens	219 lm	234 lm
Luminous Intensity	22308 mcd	21541 mcd
SCP	17	19
CRI		85
Illumination Angle		320°
Emitted Color		Cool White
Color Temperature		6000K
Base	Ba15d Dual-Contact Bayonet	
Base Material	Nickel-Plated Brass	
Dimmability	Not Dimmable	
Oper. Temperature	-22°F ~+122°F / -30°C ~+50°C	
Dimensions	L1.92 x WØ0.78 inch L48.8 x WØ20 mm	
Net Weight	0.025 lb / 0.4 oz / 11.34 g	