



LED Post Top Omnidirectional Corn Lamps

27 to 118 Watts – 120-277VAC – 4000K or 5000K White – Dimmable – E39 Base – UL



FEATURES

- 5 Year LEDtronics Limited Warranty
- Direct Retrofit into E39 Base Fixtures
- Energy Savings of up to 85%
- Lumen Maintenance over 70% @ 50,000+ Hours
- Solid State – High Shock/Vibration Resistant
- Even, Omnidirectional Lighting
- Wide Oper. Temp. Range: -40°F to ~+113°F
- Safe to Use in Enclosed Luminaires
- UL/cUL Listed (E322319)
- No UV/IR Radiation
- RoHS Compliant – No Toxic Metals
- LED LM79 Reports Available


APPLICATIONS

- Street Lighting
- Outdoor Parking Areas Lighting
- Driveway & Walkway Lighting
- Security Lighting
- Parks / Playgrounds
- Rail Road Station Platforms
- Pendant Lighting
- Globe Lighting
- Garden Lighting
- Bollard Lighting




Over 35 Years of LEDtronics Design, Engineering & Manufacturing Experience

Beam Angle Omnidirectional
 Dimmability 0-10V
 Housing Polycarbonate / White
 Base E39 Mogul Screw
 Operating Temp. -40°F ~+113°F / -40°C ~+45°C
 UL/cUL Listing E322319

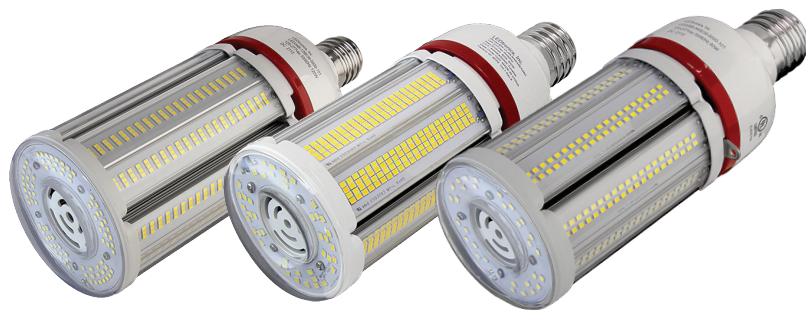


	LED19B-027E39-4000-101	LED19B-027E39-5000-101	LED28B-060WE39-5000-101	LED36B-120E39-5000-101	LED28BCT-4260E39-4050-101	LED36BCT-84120E39-4050-101
Color Temp.	4000K	5000K	5000K	5000K	4000K	4000K
Emitted Color	Natural White	Pure White	Pure White	Pure White	Natural White	Natural White
Input Power	26.65 Watts	26.65 Watts	56.98 Watts	118.1 Watts	59.55 Watts	117.9 Watts
Input Voltage	120~277VAC	120~277VAC	120~277VAC	120~277VAC	120~277VAC	120~277VAC
Input Current	0.253A	0.253A	0.510A	0.980A	0.510A	0.98A
Power Factor	0.8770	0.8770	0.8812	0.9043	0.8988	0.9017
Total Lumens	3328 lm	3481 lm	7516.24 lm	14868.2 lm	7659.3 lm	14404 lm
Efficacy	124.88 lm/W	130.62 lm/W	131.91 lm/W	125.895 lm/W	128.63 lm/W	122.17 lm/W
Max. Candela	542 cd	542 cd	1109 cd	2016 cd	1110 cd	2016 cd
CRI	82.5	82.5	82.5	82.5	82.5	80
Net Weight	0.88 lb / 400 g	0.88 lb / 400 g	0.88 lb / 400 g	3.73 lb / 1.69k g	2.2 lb / 1 kg	3.73 lb / 1.69 kg

SUGGESTED APPLICATIONS

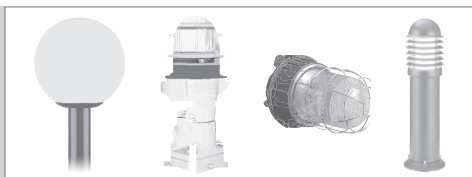

CABLE ENCLOSED



LEDTRONICS

America's Premium Brand LED Company™



© 2022 LEDtronics, Inc.



23105 Kashiwa Court, Torrance, CA 90505
 Phone: (800) 579.4875 / (310) 534.1505
 Fax: (310) 534.1424
 E-mail: info@ledtronics.com
 Website: ledtronics.com

To order LEDtronics products, contact the Distributor or Sales Representative in your area.

Visit our website to find your local Distributor or Representative from our worldwide network: LEDtronics.com

WWW.LEDTRONICS.COM

LOG 856 / Rev 03-2022

Check LEDTRONICS.COM for latest data. Printed material may be outdated.