



# LED Area Flood Lights with Adjustable Bracket

10 to 12 Watts – 100~277VAC or 24VDC – 3000K or 5000K – Aluminum Body – Clear Lens – IP65



## FEATURES

- 5 Year LEDtronics Warranty
- Energy Savings of up to 70% over HID Lamps
- Choice of Input Voltage: 100~277VAC or 24VDC
- IP65 Rated: Suitable for Wet Locations Indoors & Outdoors
- Long Life: Lumen Maintenance over 70% @ 100,000+ Hours
- Full Cutoff, 95°x105° Wide Beam Angle
- Black Aluminum Housing, Rugged Construction, Compact
- Clear Tempered Glass Lens
- Angular Adjustable U-Bracket / Multiple Mounting Options
- Improves Landscape Ambience, Security & Provides Accent Lighting, While Reducing Energy Costs, Lightweight
- High Lumen, High Efficacy, No Glare
- Solid State: High Shock & Vibration Resistant
- Wide Ambient Operating Temperature Range: ~-22F to ~+113F [~-30C to ~+45C]

## APPLICATIONS

Solar & Energy-Saving Applications Requiring Adjustable-Angle Uniform Illumination:

- Garden/Landscape Lighting
- Walkways/Pathways
- Amusement Parks/Recreation Areas
- Architectural Wall Washing
- Illuminate Signs & Pathways
- Emergency Exit Way Lighting

## AVAILABLE OPTIONS

- Other LED CCTs: 4000K, 5700K, 6500
- Other Voltages
- Other Beam Angles

Over 35 Years of LEDtronics Design, Engineering w & Manufacturing Experience

Uses 12 Watts, Replaces MH/HPS up to 60W


### GDL002-010W-XPW-024V-B

<b>Input Voltage</b>	24VDC
<b>Input Power</b>	12 Watts
<b>Input Current</b>	0.50A
<b>Max. Candela</b>	555 cd
<b>Total Lumens</b>	1339 lm
<b>Efficacy</b>	112 lm/W
<b>CRI</b>	≥80
<b>Illumination Angle</b>	95° x 105° Full Cutoff
<b>Emitted Color</b>	Pure White
<b>Color Temperature</b>	5000K
<b>Dimmability</b>	Not Dimmable
<b>Oper. Temperature</b>	-22°F ~+113°F -30°C ~+45°C
<b>Housing</b>	Aluminum (ADC12) / Black
<b>Lens Material</b>	Tempered Glass / Clear
<b>Protection Rating</b>	IP65
<b>Dimensions (LxWxH) (without Bracket)</b>	4.98 x 4.99 x 1.72 inch 126.5 x 126.8 x 43.6 mm
<b>Weight</b>	1.63 lbs / 0.74 kg



### GDL002-010W-XIW-101A-B (Warm White) GDL002-010W-XPW-101A-B (Pure White)

Emitted Color	Warm White	Pure White
<b>Color Temperature</b>	3000K	5000K
<b>Input Voltage</b>	100~277VAC (Tested @ 120VAC)	
<b>Input Power</b>	10.8 Watts	
<b>Input Current</b>	0.14A	0.15A
<b>Power Factor</b>	0.64	0.62
<b>Total Lumens</b>	1054 lm	1136 lm
<b>Efficacy</b>	98 lm/W	105 lm/W
<b>Max. Candela</b>	447 cd	487 cd
<b>CRI</b>	≥80	
<b>Illumination Angle</b>	95° x 105°	95° x 95°
<b>Dimmability</b>	Not Dimmable	
<b>Oper. Temperature</b>	-22°F ~+113°F / -30°C ~+45°C	
<b>Housing</b>	Aluminum (ADC12) / Black	
<b>Lens Material</b>	Tempered Glass / Clear	
<b>Protection Rating</b>	IP65	
<b>Dimensions (L x W x H) (without Bracket)</b>	4.98 x 4.99 x 1.72 inch 126.5 x 126.8 x 43.6 mm	
<b>Weight</b>	1.63 lbs / 0.74 kg	

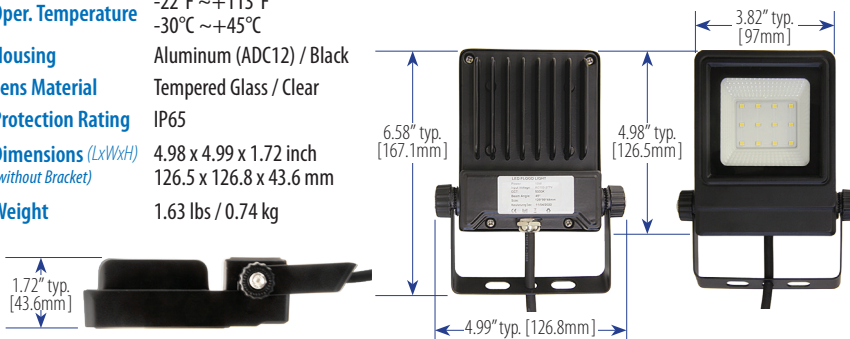

# LEDTRONICS®

America's Premium Brand LED Company™



© 2022 LEDtronics, Inc.

23105 Kashiwa Court, Torrance, CA 90505  
 Phone: (800) 579.4875 / (310) 534.1505  
 Fax: (310) 534.1424  
 E-mail: info@ledtronics.com  
 Website: ledtronics.com



To order LEDtronics products, contact the Distributor or Sales Representative in your area.

Visit our website to find your local Distributor or Representative from our worldwide network:

**LEDtronics.com**