



LED Slim Shoebox Area Lights, Blade-style

150 & 300 Watts – Type V Circular Beam – Dimmable – 5000K Pure White – IP65 – UL



Modern Design with Hinged, Adjustable Bracket for Wall or Pole Mounting



FEATURES

- 5 Year LEDtronics Warranty
- UL/cUL Listed (E330342)
- Dimmable 0-10V, Title 24 Compliant
- Energy Savings of up to 70% over HID Lamps
- IP65 Rated: Suitable for Outdoor Wet Locations
- Lumen Maintenance over 70% @ 50,000+ Hours
- IESNA Type V 130°x120° Circular Lighting Pattern
- One-Piece, Lightweight, Die-Cast Aluminum Housing
- UV-Resistant, Polycarbonate Optical Lens
- Coffee-Bronze, Powder-Coated Finish
- Multiple Mounting Options Available – See Page 2
- High Lumen, High Efficacy, No Glare
- Solid State: Shock & Vibration Resistant

APPLICATIONS

- Parking Lots & Structures
- Roadway & Street Lighting
- Building Security Floodlights
- Up/Down Spotlighting
- Pole-Mounted Area Lighting
- Tennis Courts, Stadiums, Parks, Playgrounds
- Tunnels, Caves, Mines
- Driveway & Walkway Lighting
- Construction Lighting

AVAILABLE OPTIONS

- Higher Voltages: 277- 480V
- IESNA Type III & IV Lighting Patterns
- Other Housing Powder-Coat Finishes: Black, Silver & White
- Shorting Caps & Surge Protectors

40 Years of LEDtronics Design, Engineering & Manufacturing Experience

Only 150 Watts, Exceeds Light Output of 360W MH/HPS



A Mount: Slip Fitter Bracket



B Mount: Round/Square Pole Adjustable Arm



D Mount: Hinged Adjustable Trunnion/Wall Bracket

SBX001T7-150W-XPW-105A-BNS-A (Slip Fitter Bracket)

SBX001T7-150W-XPW-105A-BNS-B (Round/Square Pole Adjustable Arm)

SBX001T7-150W-XPW-105A-BNS-D (Hinged Adjustable Trunnion/Wall Mounting Bracket)

	A	B	D
Input Power	148 Watts	148 Watts	148 Watts
Input Voltage	100~277VAC (Tested @ 120VAC)		
Input Current	1.23A	1.23A	1.23A
Power Factor	1.0	1.0	1.0
Total Lumens	19,497 lm	19,497 lm	19,497 lm
Efficacy	132 lm/W	132 lm/W	132 lm/W
Max. Candela	5,952 cd	5,952 cd	5,952 cd
Color Temperature	5000K	5000K	5000K
LED Emitted Color	Pure White	Pure White	Pure White
CRI	>80	>80	>80
Beam Angle / Pattern	130°x120° / Type V (Circular)		
Dimmability	0-10V Dimmable		
Operating Temp.	-40°F ~+113°F / -40°C ~+45°C		
Housing	Aluminum Alloy / Bronze Color		
Protection Rating	IP65 (Water-Resistant to Low-Pressure Spray)		
Dimensions (L x W x H)	20.71 x 12.40 x 3.11 in. 526 x 315 x 79 mm	20.8 x 12.4 x 6.38 in. 528 x 315 x 162 mm	18.96 x 12.4 x 2.46 in. 482 x 315 x 62 mm
Net Weight	9.39 lbs / 4.26 kg	10.51 lbs / 4.77 kg	9.6 lbs / 4.35 kg

LEDTRONICS

America's Premium Brand LED Company™



© 2023 LEDtronics, Inc.

23105 Kashiwa Court, Torrance, CA 90505
Phone: (800) 579.4875 / (310) 534.1505

Fax: (310) 534.1424

E-mail: info@ledtronics.com

Website: ledtronics.com



To order LEDtronics products, contact the Distributor or Sales Representative in your area.

Visit our website to find your local Distributor or Representative from our worldwide network:


LEDtronics.com

WWW.LEDTRONICS.COM

LOG 8771 / Rev 03-2023

Check LEDTRONICS.COM for latest data. Printed material may be outdated.

LED Slim Shoebox Area Lights, Dimmable – 300 Watts

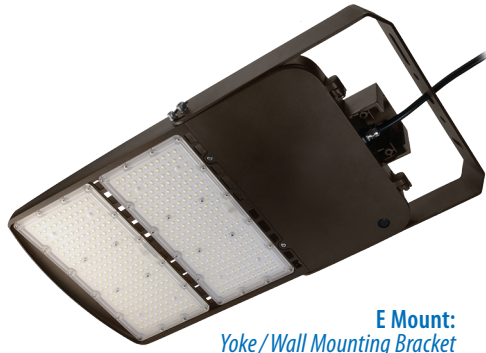


E Mount:
Yoke / Wall Mounting Bracket

Only 300 Watts, Replaces up to 500W MH/HPS

SBX002T7-300W-XPW-105A-BNS-E

Input Power	293 Watts
Input Voltage	100~277VAC (Tested @ 120VAC)
Input Current	0.245A
Power Factor	1.0
Total Lumens	41,003 lm
Efficacy	140 lm/W
Max. Candela	11,757 cd
Color Temperature	5000K
LED Emitted Color	Pure White
CRI	>80
Beam Angle / Pattern	135°x130° / Type V (Circular)
Dimmability	0-10V Dimmable
Operating Temp.	-40°F ~+113°F / -40°C ~+45°C
Housing	Aluminum Alloy / Bronze Color
Protection Rating	IP65 (Water-Resistant to Low-Pressure Spray)
Dimensions (L x W x H)	25.27 x 12.68 x 2.42 in. 642 x 322 x 61 mm
Net Weight	15.2 lbs / 6.9 kg

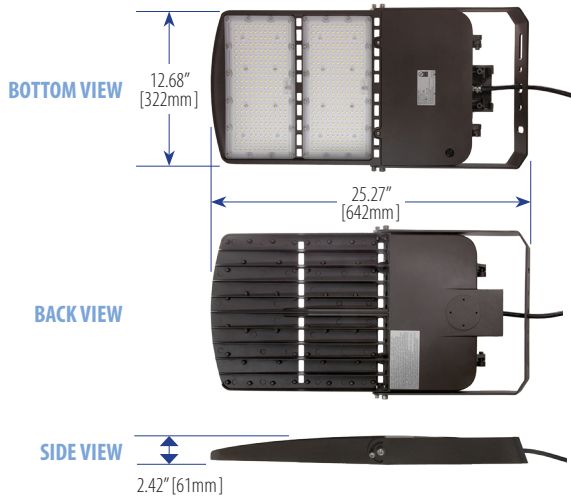


INSTALLATION OPTIONS


* Please specify the type of **INSTALLATION** ordered:

- A** - Pole-Top Slipfitter Bracket
- B** - Square/Round Pole Mount w/Adjustable Slipfitter Bracket
- C** - Square/Round Pole Mount
- D** - Trunnion/Wall Mount Adaptor
- E** - Yoke Bracket Arm
- x** - None


A-Bracket –
Adjustable Slipfitter Bracket Arm




D-Bracket –
Trunnion/Wall Mount Adaptor



B-Bracket –
Square / Round Pole Mount with Adjustable Slipfitter Bracket



E-Bracket –
Yoke Bracket Arm



C-Bracket –
Square / Round Pole Mount

