



LED Omnidirectional Corn Lamps

6 Watts – 100-277VAC – 6000K Pure White – 360° Beam – Clear Lens – E26 & P28s Base



FEATURES

- 5 Year LEDtronics Limited Warranty
- Direct Retrofit into E26 or P28s Base Fixtures
- Energy Savings of up to 85% over HID
- Lumen Maintenance >70% @ 50,000+ Hours
- Solid State – High Shock/Vibration Resistant
- Even, Omnidirectional Lighting
- Wide Oper. Temp. Range: -4°F to ~+149°F
- Safe to Use in Enclosed Luminaires
- UL/cUL Listed (E474634)
- No UV/IR Radiation / Meets FCC Part 15

APPLICATIONS

- Street Lighting
- Outdoor Parking Areas Lighting
- Driveway & Walkway Lighting
- Security Lighting
- Parks / Playgrounds
- Rail Road Station Platforms
- Pendant Lighting
- Globe Lighting
- Garden Lighting
- Bay Lighting




Over 40 Years of LEDtronics Design, Engineering & Manufacturing Experience

LED16SM-06E26-XPW-101W (E26 Base)
LED16SM-06P28S-XPW-001W (P28s Base)

	06E26	06P28S
Base	E26	P28s
Input Power	5.8 Watts	
Input Voltage	100~277VAC (Tested @ 120VAC)	
Input Current	0.049A	
Total Lumens	682 lm	
Efficacy	118 lm/W	
Max. Candela	85 cd	
Power Factor	0.98	
LED Emitted Color	Pure White	
Color Temperature	6000K	
Beam Angle	360°	
Dimmability	Not Dimmable	
Lens	Polycarbonate / Clear	
Oper. Temperature	-4°F ~+149°F / -20°C ~+65°C	
Dimensions	5.15 x 1.58 in 131 x 40 mm	5.38 x 1.58 in 137 x 40 mm
Weight	0.21 lbs / 3.36 oz / 95.25 g	



Installation for Vertical Position Only:
Base Up or Base Down

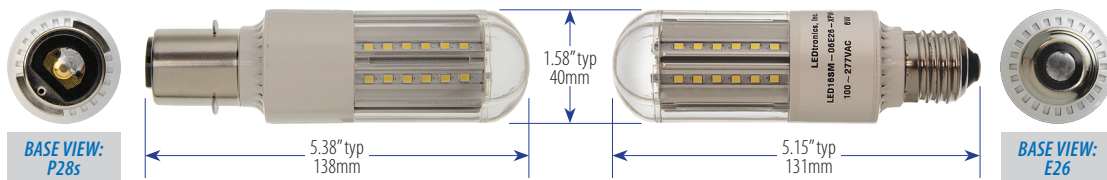

LEDTRONICS®

America's Premium Brand LED Company™



© 2023 LEDtronics, Inc.



23105 Kashiwa Court, Torrance, CA 90505
 Phone: (800) 579.4875 / (310) 534.1505
 Fax: (310) 534.1424
 E-mail: info@ledtronics.com
 Website: ledtronics.com

To order LEDtronics products, contact the Distributor or Sales Representative in your area.

Visit our website to find your local Distributor or Representative from our worldwide network:
LEDtronics.com

WWW.LEDTRONICS.COM

LOG 885 / Rev 07-2023

Check LEDTRONICS.COM for latest data. Printed material may be outdated.