



LED A21 Bulb, Dimmable, Frosted, 9W

Replaces Incandescents 75 to 100 Watts – E26 Base – 3000K Warm White



FEATURES

- 3 Year LEDtronics Limited Warranty
- Direct Retrofit into E26 Edison Base Fixtures
- Directional (180°) Candela Exceeds 100 Watt Incandescent
- Lumen Maintenance over 70% @ 50,000+ Hours
- UL/cUL Listed: E343952 (LED-G70-E26)
- Energy Savings of up to 80%
- Dimmable with Standard Lamp Dimmers
- High CRI / High Lumen with Wide Light Distribution
- UV-Protected Polycarbonate Diffused Lens

APPLICATIONS

- Suitable for Damp Locations
- Architectural Lighting
- Task Lights
- Store Front Displays & Retail Display Cases
- Exhibit Set-ups
- Accent Lighting
- Ceiling Down Lights

Over 30 Years of LEDtronics Design, Engineering & Manufacturing Experience




FROSTED LENS

Replaces Incandescent Bulbs up to 100 Watts

E26 BASE

DEC-A21F-9W-XIW-120AWD-ES

Input Power	9 Watts
Input Voltage	120VAC
Total Lumens	750 lm
Max. Candela	180 cd <i>(exceeds 100W Incandescent)</i>
Power Factor	0.80
Efficacy	80 lm/W
CRI	>80
Color	Warm White
Color Temperature	3000K~3200K
Angle of Illumination	180°
Oper. Temperature	-13°F ~+104°F / -25°C ~+40°C
Protection Rating	IP50 – Dust Protected
Heatsink	Aluminum Alloy / Silver
Lens	Polycarbonate / Frosted White
Base	E26
Dimensions	5.27 x 0.82 inch / 134 x 072 mm
Net Weight	8.16 oz / 231.3 g

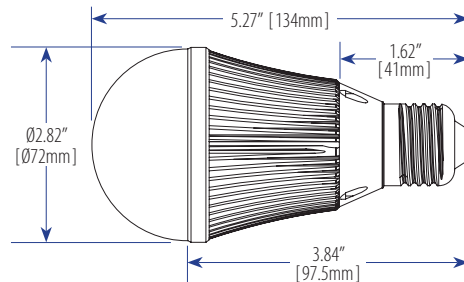

LEDTRONICS®

America's Premium Brand LED Company™



23105 Kashiwa Court, Torrance, CA 90505
 Phone: (800) 579.4875 / (310) 534.1505
 Fax: (310) 534.1424
 E-mail: info@ledtronics.com
 Website: ledtronics.com

© 2017 LEDtronics, Inc.

To order LEDtronics products, contact the Distributor or Sales Representative in your area.

Visit our website to find your local Distributor or Representative from our worldwide network:

LEDtronics.com

WWW.LEDTRONICS.COM

LOG 473 / Rev 02-2017

Check LEDTRONICS.COM for latest data. Printed material may be outdated.

DEC-A21F-9W-XIW-120AWD-ES

Luminaire Photometric Report

Filename: DEC-A21F-9W-XIW-120AWD-ES

Manufacturer: LEDTRONICS

Luminaire: FROSTED LENS, 120VAC, 9.2W

Luminaire Cat: DEC-A21F-9W-XIW-120AWD-ES

Lamp: LUMEN RATING: 750.3Lms.

Lamp Output: 1 lamp, rated Lumens/lamp: 750.3

Max Candela: 181.7 at Horizontal: 0°, Vertical: 0°

Luminous Opening: Point

Test: 8-22-13



Photometry : Type C

CIE Class: Semi-Direct

Cutoff Class: Semicutoff

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	144.8	19.3%	19.3%
0-40	241.8	32.2%	32.2%
0-60	450.8	60.1%	60.1%
60-90	212.4	28.3%	28.3%
70-100	155.9	20.8%	20.8%
90-120	69.4	9.2%	9.2%
0-90	663.1	88.4%	88.4%
90-180	87.1	11.6%	11.6%
0-180	750.3	100%	100%

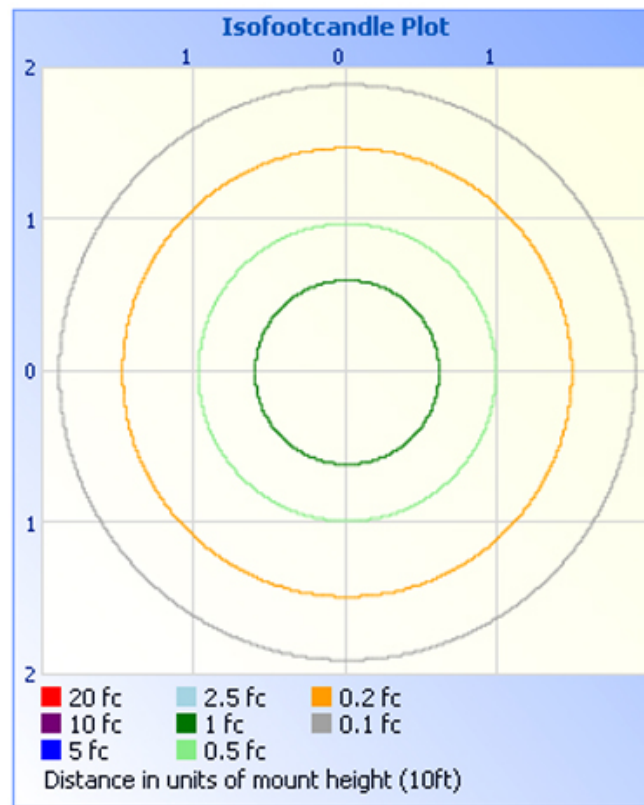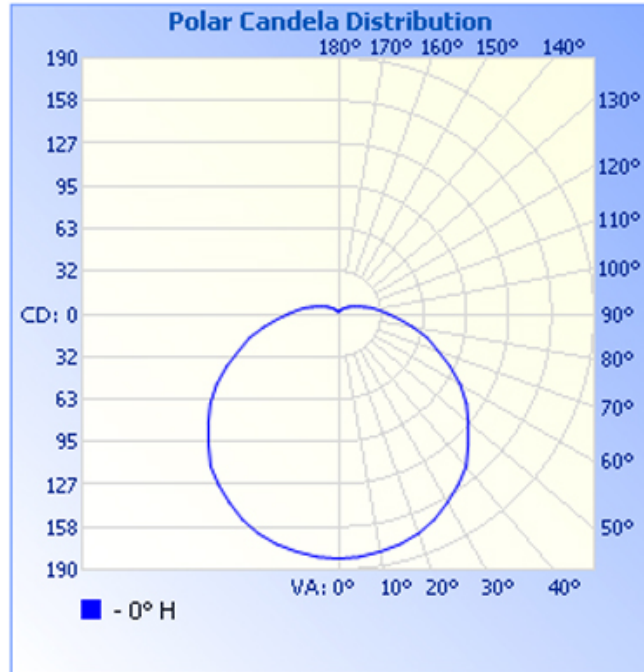

Illuminance at a Distance

Distance (ft)	Center Beam fc	Beam Width
2.0ft	45.4 fc	8.6 ft
4.0ft	11.4 fc	17.3 ft
6.0ft	5.0 fc	25.9 ft
8.0ft	2.8 fc	34.6 ft
10.0ft	1.8 fc	43.2 ft

■ Beam Spread: 130.3°