



LED Compact Canopy Light, Dimmable

40 Watts – 100~277VAC – Clear Lens – 5000K White – 160° Wide Beam – IP65 – UL



FEATURES

- 5 Year LEDtronics Warranty
- Energy Savings of up to 75%
- Wide Voltage Range: 100~277VAC
- Lumen Maintenance over 70% @ 50,000 Hours
- IP65 Rated: Suitable for Wet Locations
- 0-10V Dimmable – Title 24 Compliant
- Solid-State: High Shock & High Vibration Resistant
- Rugged, One-Piece Die-Cast Aluminum Housing
- UV-Proof Clear Polycarbonate Lens
- UL/cUL Listed: E495046 (AST-PG02-40WXYZA1-AAK)
- RoHS Compliant – No Toxic Metals

APPLICATIONS

- Gas Stations
- Manufacturing, Factory Floors
- Warehouses, Loading Docks
- Parking Structures
- Tunnels, Canopies
- Entrances, Walkways, Underpasses


AVAILABLE OPTIONS

- Motion/Occupancy Sensor
- Surge Protection
- Other Wattages
- Other LED CCT Colors: 4000K~5700K

Over 35 Years of LEDtronics Design, Engineering & Manufacturing Experience



CLEAR LENS

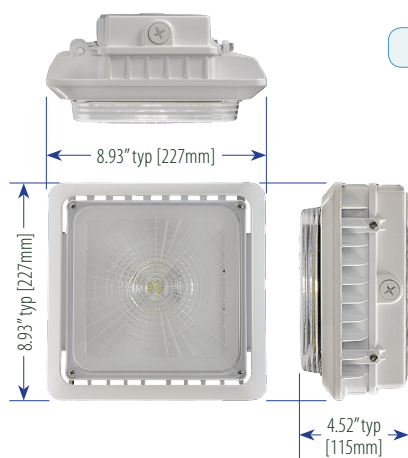

**Only 40 Watts, Replaces
HID Lamps up to 175W**

CNP000-045WC-XPW-105

Input Power	40.74 Watts
Input Voltage	100~277VAC (Tested @ 120VAC)
Input Current	0.330A
Power Factor	0.90
Lumens	5374 lm
Luminous Efficacy	131.91 lm/W
Max. Candela	1341 cd
CRI	80
Emitted Color	Pure White
Color Temperature	5000K
Illumination Angle	160°
Dimmability	0-10V Dimmable
Operating Temp.	-4°F ~+113°F / -20°C ~+45°C
Operating Humidity	20% - 90% RH
Housing	Aluminum / White
Lens	Polycarbonate / Clear
Protection Rating	IP65
Dimensions	L8.93 x W8.93 x H4.52 in L227 x L227 x H115 mm
Weight	4.38 lbs / 1.986 kgs

LEDTRONICS®

America's Premium Brand LED Company™



© 2019 LEDtronics, Inc.



23105 Kashiwa Court, Torrance, CA 90505
Phone: (800) 579.4875 / (310) 534.1505
Fax: (310) 534.1424
E-mail: info@ledtronics.com
Website: ledtronics.com

To order LEDtronics products,
contact the Distributor or Sales Representative in your area.

Visit our website to find your local Distributor or Representative from our worldwide network:

LEDtronics.com

WWW.LEDTRONICS.COM

LOG 782 / Rev 06-2019

Check LEDTRONICS.COM for latest data.
Printed material may be outdated.

Luminaire Photometric Report

Filename: CNP000-045WC-XPW-105

Manufacturer: LEDTRONICS

Luminaire: CLEAR LENS, 39.7W, 120VAC

Lamp Output: 1 lamp, rated Lumens/lamp: 5384.1

Max Candela: 1,341.0 at Horizontal: 45°, Vertical: 60°

Luminous Opening: Point

Test: 1-9-19

Photometry : Type C




CIE Class: Direct

Cutoff Class: Cutoff

Nema Type: 7 X 7

Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	79.7	1.5%	90-100	64.3	1.2%
10-20	234.2	4.3%	100-110	59.1	1.1%
20-30	419.6	7.8%	110-120	45.0	0.8%
30-40	688.6	12.8%	120-130	26.9	0.5%
40-50	952.0	17.7%	130-140	12.0	0.2%
50-60	1,085.0	20.2%	140-150	2.9	0.1%
60-70	934.0	17.3%	150-160	0	0%
70-80	563.4	10.5%	160-170	0	0%
80-90	217.3	4.0%	170-180	0	0%

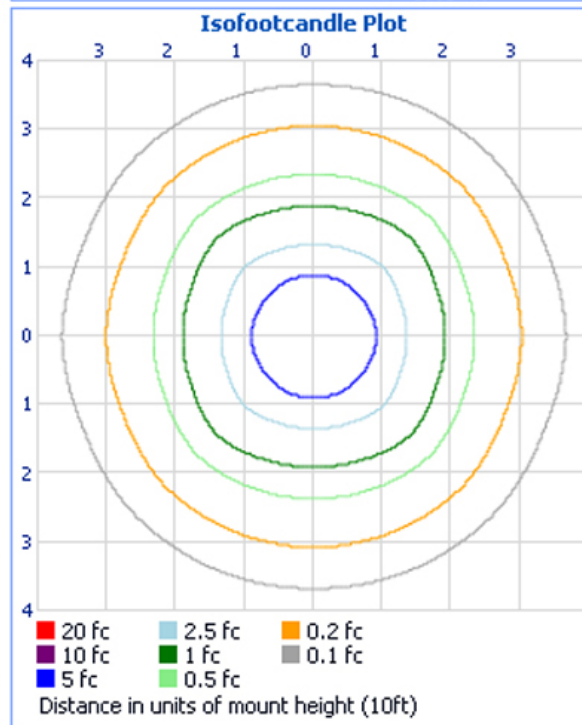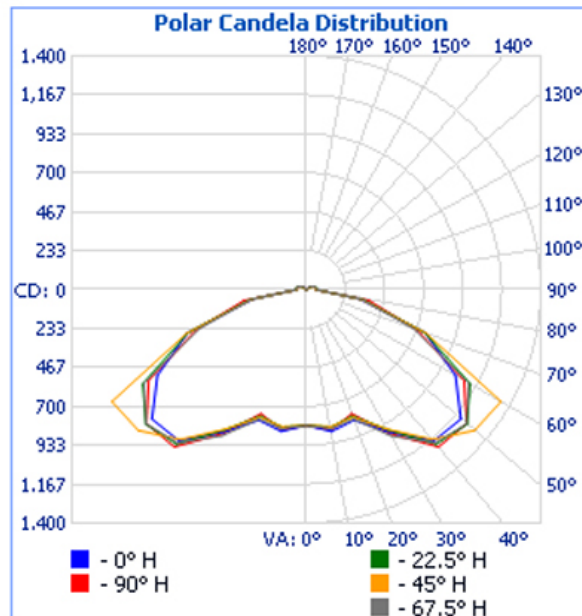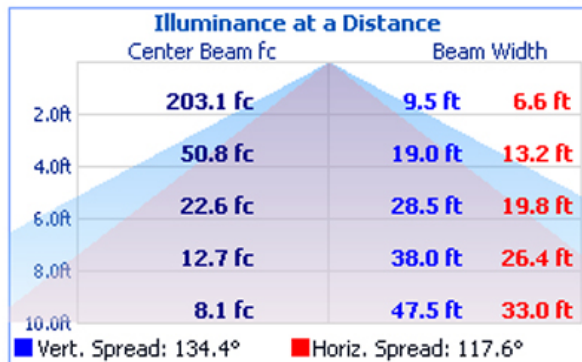

APPLICATIONS

